DAIKIN

2024
NEW

A update

Sky Air
Light commercial applications






Pure air
because we care

Breathe healthy air with the round flow
UV Streamer kit

90% of our time is spent indoors. However indoor air is 2 to 5 times more polluted than outdoor air.

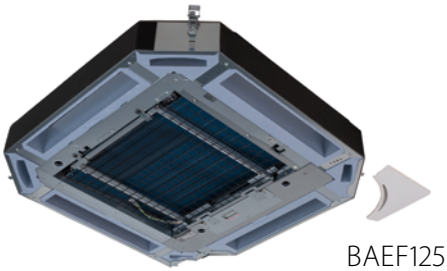

BAEF125AWB

These internal pollution effects on people are manifested in the long run. Tackle them now!

Our UV streamer kit offers you the solution:

- It purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology
- Thanks to large air flow rate of the Round flow cassette, clean air can be quickly delivered to every corner of your space
- Can be retrofitted into existing installations
- Can be used with BYCQ140E and BYCQ140EW decoration panels


99.9%
of viruses removed in 30 minutes, thanks to Daikin's unique
Catch & Clean approach

Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m³ room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

* Additional details regarding this function can be found in the unit technical manual.

Tested according to real life sized room





View full test report:

Sky Air the solution for the light commercial sector

Sky Air is Daikin's industry-leading light commercial range, which has been designed for optimum seasonal energy efficiency. Providing the ideal solution for all kinds of small commercial spaces, the Sky Air series offers a complete comfort solution that puts you in total control of your heating and cooling, ventilation and air curtains.

Sky Air
Light commercial applications

New Sky Air low height series 390
Low sound enclosure 391
Why choose a Daikin Sky Air 392
In the spotlight 394

Indoor units 396
Products overview indoor units 396
Benefits overview indoor units 398
Ceiling mounted cassettes 402
NEW UV Streamer kit 402
UNIQUE FCAHG-H 405
UNIQUE FCAG-B 406
UNIQUE FFA-A9 410
Concealed ceiling units 414
UNIQUE Auto cleaning filter for concealed ceiling units 414
Multi zoning kit 415
FDXM-F9 416
FBA-A(9) 418
FDA125A 422
FDA200-250A 423
ADEA-A 424
Wall mounted units 425
FAA-B 425
FTXM-R 428
Ceiling suspended units 429
NEW combinations FHA-A(9) 429
UNIQUE FUA-A 433
Floor standing units 435
NEW combinations FVA-A 435
Concealed floor standing units 438
FNA-A9 438
Biddle air curtains 440
NEW Biddle air curtain for ERQ 441


Outdoor units 443
Products overview outdoor units 444
Benefits overview outdoor units 445
Why choose Sky Air A-series 446
R-32 BLUEVOLUTION range 450
RZAG-A Sky Air Alpha-series 450
RZAG-NV1/NY1 Sky Air Alpha-series 450
RZASG-MV(1)/MY(1) Sky Air Advance-series 451
RZA-D Sky Air Advance-series 452
ARXM-R/ AZAS-MV/MY Sky Air Active-series 453
Options & Accessories 454

Sky Air Alpha-series


Low height.
High value.



Unique, low-height single fan range



Compact unit, easy to transport



Market-leading serviceability and handling



Fast and easy access to all critical component

- Single screw access
- Wider access area



Newly positioned handle for easier carrying

The smart way for sound reduction



Daikin dedicated solution for sound reduction

Meet strict sound requirements, while increasing flexiblity to apply Sky Air and VRV heat pumps thanks to sound power reduction of up to 10 dB(A).

- **Guaranteed high performance:** optimised design to keep the capacity and air flow as close as possible to the standard conditions
- **Faster and reliable planning:** no calculations or estimations necessary thanks to tested data according to ISO 3744
- **Perfect fit:** specially designed for Sky Air and VRV heat pumps
- **Maximum flexibility:** can be installed and retrofitted on any plain surface
- **Easy access:** simple and fast installation and maintenance through large side panels with fast locks
- **Designed to be discreet:** tailor-made low height design; highly aesthetic finishing and smooth surface in anthracite colour-tone



www.daikin.eu/en_us/products/ekln-a.html

Sky Air VRV

7 reasons why Sky Air is unique in the market

1 Full Sky Air R-32 range delivering future-proofed, best-in-class climate control

Sky Air A-series BLUEVOLUTION

More details on page 444



System	Type	Model	Product name	35	50	60	71	100	125	140	200	250
				3.5 kW	5.0 kW	6.0 kW	6.8 kW	9.5 kW	12.1 kW	13.4 kW	21.5 kW	23.6 kW
Air cooled	Heat pump	**Sky Air Alpha-series** R-32 A++ (A+++ - D) - Industry leading technology for commercial applications - Dedicated solution for infrastructure cooling - Variable Refrigerant Temperature (RZAG71-100-125-140 series) - Maximum piping length up to 85m (50m for RZAG35-50-60) - Replacement technology - Extended operation range down to -20°C in both heating and cooling - Pair, twin, triple and double twin application (RZAG71-100-125-140 series)	RZAG-A RZAG-NV1/NY1									
		Sky Air Advance-series R-32 A+ (A+++ - D) - Technology and comfort combined for commercial applications - Very compact and easy to install outdoor units - Maximum piping length up to 50m (RZA-D up to 100m) - Replacement technology - Operation range down to -15°C both cooling and in heating (RZA-D down to -20°C) - Pair, twin, triple and double twin application	RZASG-MV(1)/MY(1)									
			RZA-D									
		Sky Air Active-series R-32 A (A+++ - D) - Ideal solution for busy environments and small shops - Very compact and easy to install outdoor units - Maximum piping length up to 30m - Replacement technology - Easy-to-mount outdoor units: roof, terrace or wall - Exclusively offered for pair applications	ARXM-R AZAS-MV/MY									


Full indoor line up

(over 45 different models)



2 High energy efficiency

- **Top seasonal efficiency**
  - SEER up to 8.02 and A++ label in cooling and heating
  - Variable Refrigerant Temperature that automatically adapts the refrigerant temperature to the load
- Round flow and concealed ceiling units with **auto cleaning filter**






3 Best comfort

- **Variable Refrigerant Temperature** preventing cold draughts
- **Low sound** indoor and outdoor units
- **Presence and floor sensors** direct the air flow away from persons, while ensuring an even temperature distribution
- Operation down to **-20°C in heating and cooling** operation

NEW
- **UV Streamer kit**, purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc
- Fresh air intake integrated in indoor unit





4 Top reliability

- For **infrastructure cooling**
  - unique boosted capacity indoor unit systems
  - duty rotation control
- **Refrigerant cooled PCB**
- New refrigerant passes keeping heat exchanger and drain holes completely open at all times
- **Most extensive testing** before new units leave the factory
- **Widest support network** and after sales service
- All spare parts available in Europe





bottom plate refrigerant pass


5 Market leading controls

- **Remote connectivity**
  - **Intuitive app** control
  - **Daikin Cloud Plus** offering online control, energy monitoring and comparison of multiple sites
- **User-friendly wired remote controller with premium design**
  - Intuitive touch button control
  - 3 color versions
  - Advanced settings can be easily done via your smartphone
- **Dedicated control solutions**
  - for retail applications
  - for infrastructure cooling



6 Superior aesthetics

- **Fully flat cassette** design unit that integrates fully flat into the ceiling
- **Auto cleaning** units ensure dirt-free ceilings with high efficiency filters for regular and dust prone areas
- Widest ever range cassette panels
  - Available in **white and black**
  - Sleek **designer panel** range

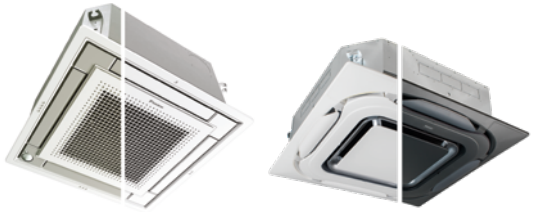

7 Unique installation benefits

- **4-way blow ceiling suspended cassette** (FUA) for rooms without false ceiling.
- Plug & play Daikin air handling unit with ERQ condensing units
- Reliably replace Daikin and non-Daikin systems without the need for pipe cleaning thanks to the new hepta filtration
- Dedicated low sound enclosure, reducing sound power up to -10 dB(A)
- Use up to 4 indoor units linked to one outdoor unit for long or irregularly shaped rooms





Always in control,
no matter where you are

Daikin Cloud Plus

Daikin Cloud Plus is a cloud-based remote control and monitoring solution for Daikin commercial HVAC installations. Using enhanced control, monitoring and predictive logic, Daikin Cloud Plus provides real-time data and support from Daikin experts to help you identify cost-saving opportunities, increase the lifetime of your equipment and reduce the risk of unexpected issues.


The ultimate control over your indoor climate and air quality

› Save energy & reduce costs
› Enhance comfort & satisfaction
› Smart control from anywhere
› Ensure healthy indoor environment
› Maximize uptime (remote prediction, monitor & diagnose)
› Integrates easily with building systems

Supporting your business and helping you succeed


› Maximize comfort and satisfaction of your staff, customers, tenants, …
› Save energy & reduce costs
› Facilitate your sustainability goals
› Cost effective control and energy monitoring of HVAC and other facility systems such as lighting
› Limits the necessity for on-site interventions
› Minimizes downtime and engineer call outs

Dashboard to easily access multiple locations, energy consumption follow up, …

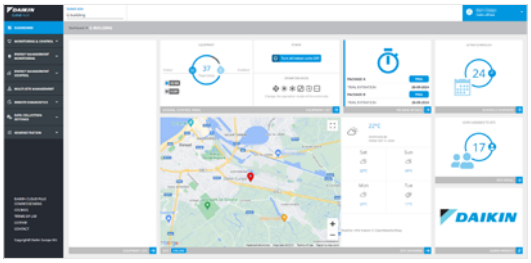

More details
on page 944

From one to ∞ sites

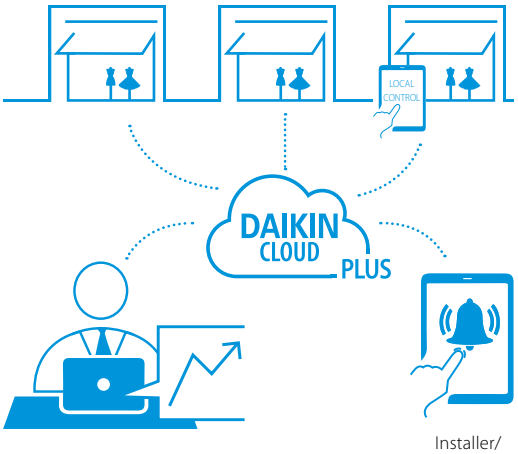



Infrastructure cooling

Unique in the market

DUTY ROTATION

RELIABLE, CONTINUOUS OPERATION 24/7 365

Infrastructure cooling

› For rooms and enclosures that require round-the-clock cooling
› Where continuous uptime is the absolute requirement for server data protection

Between **20-40%** sensible capacity increase


RELIABLE
Guaranteed system operation:
› Oversized indoor units boost cooling capacity and prevent freeze-ups on the indoor side
› Wide operating range envelope: operation range in cooling down to -20°C and up to +52°C

EFFICIENT
Optimum return on investment:
› Lowers running costs by using highly efficient direct expansion cooling systems
› Lower running costs compared to other DX systems and water based chillers.
› Reduces mechanical cooling and energy consumption with the free cooling option for single phase systems

FLEXIBLE
› Scalable in capacity
› Improved infrastructure control and management
› Lower physical footprint since no floor space is occupied
› Wide range of indoor units to suit application preferences (ceiling suspended cassettes, wall mounted indoors, concealed ceiling ducted type indoors)


Duty rotation application example

SYSTEM 1 FBA140 IN OPERATION
SYSTEM 2 FBA140 STANDBY



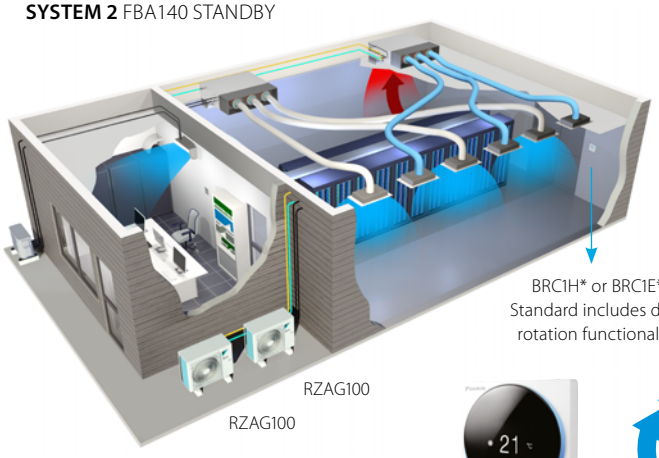


DUTY ROTATION

SYSTEM 1 FBA140 STANDBY
SYSTEM 2 FBA140 IN OPERATION

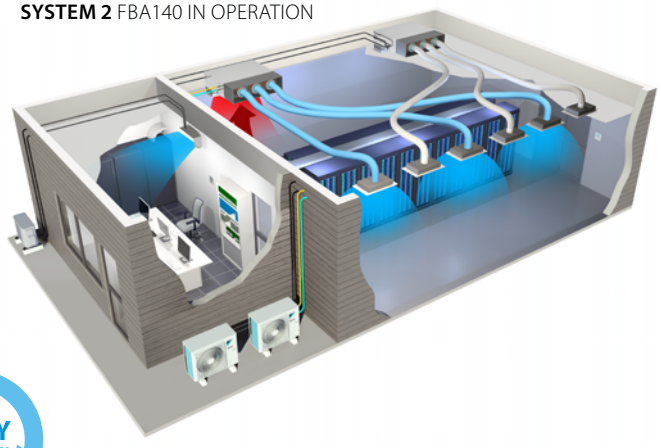

Product overview SkyAir

Type	Model	Product name		PG	
Ceiling mounted cassette	UNIQUE High COP, Round flow cassette UV Streamer kit	FCAHG-H		405	360° air discharge for the highest efficiency and comfort - High COP cassette ensures top performance for commercial applications - Auto cleaning function ensures high efficiency - Intelligent sensors save energy and maximize comfort - Flexibility to suit every room layout - Widest choice ever in decoration panel designs and colors ROUND FLOW
	UNIQUE Round flow cassette UV Streamer kit	FCAG-B		406	360° air discharge for the highest efficiency and comfort - Auto cleaning function ensures high efficiency - Intelligent sensors save energy and maximize comfort - Flexibility to suit every room layout - Lowest installation height in the market - Widest choice ever in decoration panel designs and colors ROUND FLOW
	UNIQUE Fully flat cassette	FFA-A9		410	Unique design in the market that integrates fully flat into the ceiling - Perfect integration in standard architectural ceiling tiles - Blend of iconic design and engineering excellence with a white or silver and white finish - Intelligent sensors save energy and maximize comfort - Flexibility to suit every room layout without changing the location of the unit! - Quietest 600 x 600 cassette on the market
Concealed ceiling	Slim concealed ceiling unit Auto cleaning option Multi zoning option	FDXM-F9		416	Slim design for flexible installation - Compact dimensions enable installation in narrow ceiling voids - Medium external static pressure up to 40Pa - Small capacity unit developed for small of well insulated rooms - Auto cleaning function ensures high efficiency and reliability
	Concealed ceiling unit with medium ESP Multi zoning option	FBA-A(9)		418	Slimmest yet most powerfull medium static pressure unit on the market! - Slimmest unit in class, only 245mm - Low operating sound level - Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths - Automatic air flow adjustment function measures the air volume and static pressure and adjusts it towards the nominal air flow, guaranteeing comfort
	Concealed ceiling unit with high ESP	FDA-A	 FDA125A	422	ESP up to 200Pa, ideal for large sized buildings - Discretely concealed in the ceiling: only the grilles are visible - Possibility to change ESP via wired remote control allows optimisation of the supply air volume - Flexible installation as the air suction direction can be altered from rear to bottom suction
			 FDA200-250A	423	ESP up to 250Pa, Ideal for extra large sized spaces - Discretely concealed in the ceiling: only the grilles are visible - Possibility to change ESP via wired remote control allows optimisation of the supply air volume
	Concealed ceiling unit Multi zoning option	ADEA-A		424	Ideal for residential applications with false ceilings - Energy label up to A - Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths - Slimmest unit in class, only 245mm - Exclusively offered for pair applications
Wall mounted	Wall mounted unit	FAA-B		425	For rooms with no false ceilings nor free floor space - Flat, stylish front panel - The air is comfortably spread up- and downwards thanks to 5 different discharge angles - Easy maintenance as this can be done from the front of the unit - Flexible to install: pipe connection can be bottom, left or right
	Perfera wall mounted unit	FTXM-R		428	For rooms with no false ceilings nor free floor space - Practically inaudible - 2 area motion detection sensor - Flash streamer technology - 3D air flow
Ceiling suspended	Ceiling suspended unit	FHA-A(9)		429	For wide rooms with no false ceilings nor free floor space - Ideal for comfortable air flow in wide rooms thanks to Coanda effect - Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily! - Can be mounted in corners or narrow spaces without any problem
	UNIQUE 4-way blow ceiling suspended unit	FUA-A		433	Unique Daikin unit for high rooms with no false ceilings nor free floor space - Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily! - Flexibility to suit every room layout without changing the location of the unit! - Optimum comfort guaranteed with automatic air flow adjustment to the required load - The air is comfortably spread up- and downwards thanks to 5 different discharge angles
Floor standing	Floor standing unit	FVA-A		435	For spaces with high ceilings - Ideal solution for commercial spaces with no or narrow false ceilings - Even rooms with very high ceilings can be heated up or cooled down very easily! - Guarantees a stable temperature - Vertical and horizontal outblow
	Concealed floor standing unit	FNA-A9		438	Designed to be concealed in walls, only grilles remain visible - Slimmest unit on the market with a depth of only 200mm! - Both window sill or ducted installation are possible thanks to sufficient ESP - Whisper quiet operation allows installation in any location

Full R-32 BLUEVOLUTION line up

FULL single fan range

Capacity class										Outdoor unit combination					
										R-32					
										Sky Air Alpha-series		Sky Air Advance-series		Sky Air Active-series	Sky Air Active-series
25	35	50	60	71	100	125	140	200	250	RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY	ARXM-R
				•	•	•	•				✓				
	•	•	•	•	•	•	•			✓	✓	✓	✓	✓	✓
•	•	•	•							✓	✓	✓	✓		
•	•	•	•							✓	✓	✓	✓		
	•	•	•	•	•	•	•			✓	✓	✓	✓	✓	✓
						•					✓	✓	✓		
								•	•				✓		
				•	•	•								✓	✓
				•	•						✓	✓	✓	✓	✓
	•	•	•							✓					
	•	•	•	•	•	•	•			✓	✓	✓	✓	NEW ✓	
				•	•	•					✓	✓	✓		
				•	•	•	•				✓	✓	✓	NEW ✓	
•	•	•	•							✓	✓	✓	✓		

Benefit overview SkyAir


We care	Home leave operation	Maintains the indoor temperature at your specified comfort level during absence, thus saving energy.
	Fan only	The unit can be used as fan, blowing air without heating or cooling.
	Auto cleaning filter	The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.
	Presence & floor sensor	The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.
Comfort	Draught prevention	When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.
	Whisper quiet	Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neightbourhood.
	Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature.
Air treatment	NEW UV Streamer kit	Purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygienic indoor environment
	Air filter	Removes airborne dust particles to ensure a steady supply of clean air.
Humidity control	Dry programme	Allows humidity levels to be reduced without variations in room temperature.
Air flow	Ceiling soiling prevention	Prevents air from blowing out too long in horizontal position, to prevent ceiling stains.
	Vertical auto swing	Possibility to select automatic vertical moving of the air discharge louvre, for uniform air flow and temperature distribution.
	Fan speed steps	Allows to select up to the given number of fan speed.
	Individual flap control	Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well.
Remote control & timer	Onecta app	Control your indoor climate from any location via smartphone or tablet.
	Weekly timer	Can be set to start heating or cooling anytime on a daily or weekly basis.
	Infrared remote control	Starts, stops and regulates the air conditioner from a distance.
	Wired remote control	Starts, stops and regulates the air conditioner.
	Centralised control	Starts, stops and regulates several air conditioners from one central point.
	Multi zoning	Allows up to 6 individual climate zones with one indoor unit
Other functions	Infrastructure cooling	Remove in a reliable, efficient and flexible way the heat constantly generated by the IT and server equipment to ensure maximum uptime while offering the best return on investment.
	Auto-restart	The unit restarts automatically at the original settings after power failure.
	Self-diagnosis	Simplifies maintenance by indicating system faults or operating anomalies.
	Drain pump kit	Facilitates condensation draining from the indoor unit.
	Twin/triple/double twin application	2, 3 or 4 indoor units can be connected to only a single outdoor unit even if they have different capacities. All indoor units operate within the same heating or cooling mode from one remote control.
	Multi model application	Up to 5 indoor units can be connected to a single outdoor unit, even if they have different capacities. All indoor units can individually be operated within the same heating or cooling mode.
	VRV for residential application	Up to 9 indoor units (even different capacities and up to 71 class) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode.

Ceiling mounted cassette units			Concealed ceiling units					Ceiling suspended units	4-Way blow ceiling suspended unit	Wall mounted unit	Perfera wall mounted unit	Floor standing units	
FCAHG-H	FCAG-B	FFA-A9	FDXM-F9	FBA-A(9)	FDA125A	FDA200-250A	ADEA-A	FHA-A(9)	FUA-A	FAA-B	FTXM-R	FVA-A	FNA-A9
													
●	●	●	●	●	●	●	●	●	●	●		●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●
○	○		○										
●	●	●											
●	●	●							●				
●	●	●		●			●				●		
●	●	●	●	●	●	●	●	●	●	●	●	●	●
○	○												
● (Optional high efficiency filter ePM10 60%)	●	●	●	●	●	●	●	●	●	●	● (Flash streamer; titanium apatite deodorising filter)	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●											
●	●	●						●	●	●	● (incl. 3D air flow)	●	
5 + auto	5 + auto	3 + auto	3	3 + auto	9 + auto	3 + auto	3 + auto	5 + auto	3 + auto	3 + auto	5 + auto	3 + auto	3 + auto
●	●	●							●				
○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	●		○
○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○
			○	○			○						
●	●	●	●	●	●		●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●		●	●	○	○	○	●	○			
●	●	●	●	●	●	●		●	●	●			●
	●	●	●	●				●					●
	●	●	●	●				●					●

● standard, ○ optional



FULLY FLAT CASSETTE

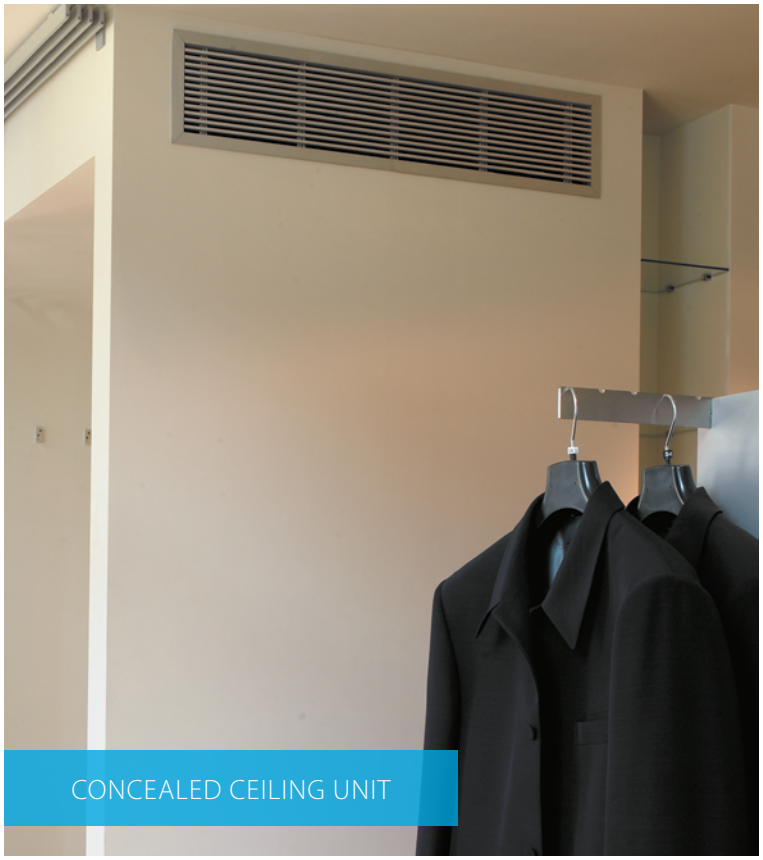

CONCEALED CEILING UNIT



CONCEALED FLOOR STANDING UNIT



4-WAY BLOW CEILING SUSPENDED CASSETTE



WALL MOUNTED UNIT



CEILING SUSPENDED UNIT




ROUND FLOW CASSETTE, DESIGNER PANEL



Pure air
because we care

Breathe healthy air with the round flow
UV Streamer kit

90% of our time is spent indoors. However indoor air is 2 to 5 times more polluted than outdoor air.

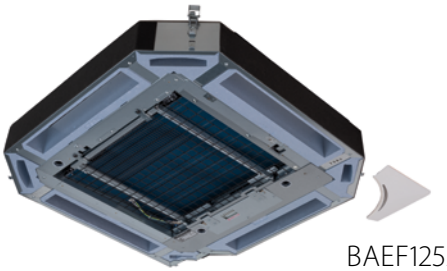

BAEF125AWB

These internal pollution effects on people are manifested in the long run. Tackle them now!

Our UV streamer kit offers you the solution:

- It purifies the air of pollutants such as viruses, bacteria, fine dust (PM1), odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology
- Thanks to large air flow rate of the Round flow cassette, clean air can be quickly delivered to every corner of your space
- Can be retrofitted into existing installations
- Can be used with BYCQ140E and BYCQ140EW decoration panels


99.9%
of viruses removed in 30 minutes, thanks to Daikin's unique
Catch & Clean approach

Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m³ room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

* Additional details regarding this function can be found in the unit technical manual.

Tested according to real life sized room






View full test report:

Daikin's unique Catch & Clean approach includes an ePM1 50% filter, UV-C light and Streamer technology

1 Effective capturing of air borne pollutants


- Highly efficient capturing particulate matter and pollutants thanks to the ISO ePM1 60% (F7) filter
- Anti bacterial and viral coating

Indicator light
Indicates operation, malfunction or replacement status

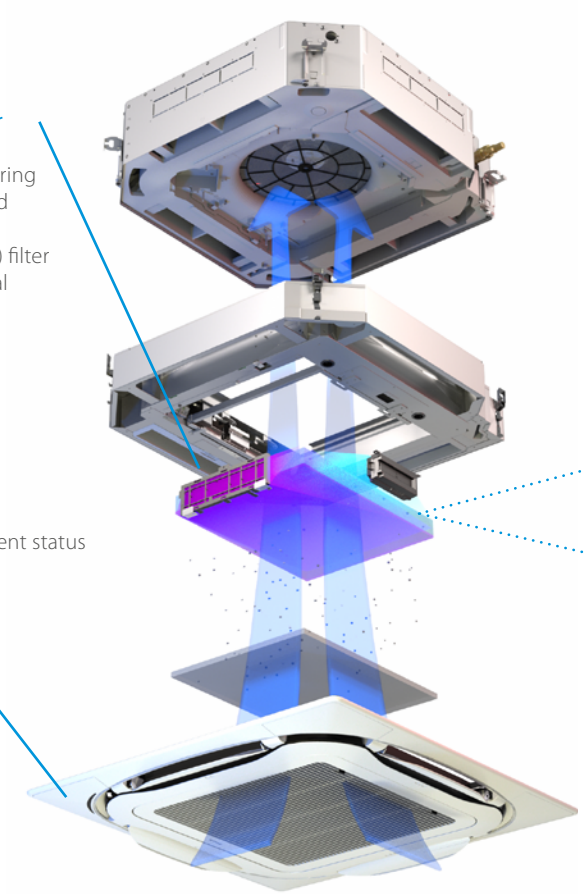

2 Effective cleaning and decomposition of pollutants
Our unique combined UV-C light and Streamer technology ensures both surface and in-depth sanitising of the filter to ensure hygienic air.

UVC LED light with high output wavelength of 265nm which is the most effective for surface cleaning and inactivation of bacteria and viruses.

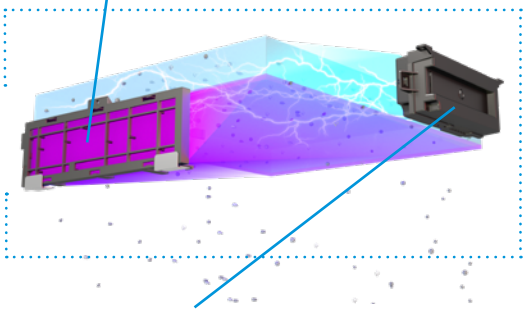

Streamer technology for deep sanitising of the filter and powerful decomposition of viruses and bacteria trapped inside the filter.

Specifications

		BAEF125AWB
Power Supply		1P, 220-240V, 50/60 Hz
Dimensions HxWxD	mm	100 x 840 x 840
Weight	kg	12
Compatible decoration panels		BYCQ140E/BYCQ140EW * (UV-streamer kit cannot be used with other filters, chambers, fresh air intake kits or air discharge outlet sealing member kit)
Filter efficiency		ePM1 60% @ISO16890 (F7)
Replacement interval		Pleated filter (BAF55A125): every year Flash streamer device: every 7 years UV-C LED: every 7 years

* For compatibility with older panels, consult your local sales representative


download the leaflet here




Complete indoor comfort, including pure air


The round flow cassette

› Maximum comfort thanks to **360° air discharge and intelligent sensors**



› **Widest ever choice in panels** to match any interior


Black auto cleaning panel


Black designer panel


Full white standard panel


White designer panel



› **Auto cleaning panel** keeps the filter free of dust for maximum efficiency

› **UV streamer kit**

NEW › Purifies the air of pollutants such as viruses, bacteria, fine dust PM1, odours, allergens, etc ensuring a healthy and hygienic indoor environment

› Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology

› Can be **retrofitted** into existing installations

UV STREAMER


99.9%
of viruses removed in 30 minutes, thanks to Daikin's unique
Catch & Clean approach

Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m³ room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

* Additional details regarding this function can be found in the unit technical manual.

Tested according to real life sized room





View full test report:

ROUND FLOW UV STREAMER

SkyAir Alpha-series BLUEVOLUTION

High COP, round flow cassette

360° air discharge for optimum efficiency and comfort

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- High COP cassette ensures top performance and great energy savings
- Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- Bigger flaps and unique swing pattern improve equal air distribution
- 5 different fan speeds available for maximum comfort
- UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 675mm lift increases flexibility and installation speed




White panel | White auto cleaning panel | Black panel | Black design panel

More details and final information can be found by scanning or clicking the QR codes.

FCAHG-H RZAG-NV1 RZAG-NY1

Efficiency data				**FCAHG + RZAG**	**71H + 71NV1**	**100H + 100NV1**	**125H + 125NV1**	**140H + 140NV1**	**71H + 71NY1**	**100H + 100NY1**	**125H + 125NY1**	**140H + 140NY1**
Cooling capacity	Nom.			kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
Heating capacity	Nom.			kW	7.50	10.8	13.5	15.5	7.50	10.8	13.5	15.5
Space cooling	Energy efficiency class				A++		-		A++		-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
	SEER				7.90	7.70	8.02	7.93	7.90	7.70	8.02	7.93
	ηs,c			%	-		318	314	-		318	314
	Annual energy consumption			kWh/a	301	432	905	1,014	301	432	905	1,014
Space heating (Average climate)	Energy efficiency class				A++		-		A+	A++	-	
	Capacity		Pdesign	kW	4.70		9.52		4.70		9.52	
	SCOP/A				4.61	4.75	4.53	4.44	4.56	4.75	4.53	4.44
	ηs,h			%	-		178	175	-		178	175
	Annual energy consumption			kWh/a	1,427	2,805	2,943	3,002	1,443	2,805	2,943	3,002

Indoor unit				**FCAHG**	**71H**	**100H**	**125H**	**140H**	**71H**	**100H**	**125H**	**140H**
Dimensions	Unit	HeightxWidthxDepth		mm	288x840x840							
Weight	Unit			kg	25.0							
Air filter	Type				Resin net							
Decoration panel	Model				Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black							
	Dimensions	HeightxWidthxDepth		mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950							
	Weight			kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5							
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	13.7/18.8/23.6	19.1/25.7/32.2	21.2/27.3/34.4		13.7/18.8/23.6	19.1/25.7/32.2	21.2/27.3/34.4	
		Heating	Low/Medium/High	m^3/min	13.7/18.8/23.6	18.3/24.6/30.8	19.7/25.5/32.1		13.7/18.8/23.6	18.3/24.6/30.8	19.7/25.5/32.1	
Sound power level	Cooling			dBA	53.0		61.0		53.0		61.0	
	Heating			dBA	53.0		61.0		53.0		61.0	
Sound pressure level	Cooling	Low/High		dBA	29.0/36.0	33.0/44.0	35.0/45.0	37.0/45.0	29.0/36.0	33.0/44.0	35.0/45.0	37.0/45.0
	Heating	Low/High		dBA	29.0/36.0	33.0/44.0	35.0/45.0	37.0/45.0	29.0/36.0	33.0/44.0	35.0/45.0	37.0/45.0
Control systems	Infrared remote control				BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB							
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220							
Piping connections	Drain				VP25 (I.D. 25/O.D. 32)							

Outdoor unit				**RZAG**	**71NV1**	**100NV1**	**125NV1**	**140NV1**	**71NY1**	**100NY1**	**125NY1**	**140NY1**
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460							
Weight	Unit			kg	81	85	95		81	85	94	
Sound power level	Cooling			dBA	64	66	69	70	64	66	69	70
	Heating			dBA	-		68	71	-		68	71
Sound pressure level	Cooling	Nom.		dBA	46	47	49	50	46	47	49	50
	Heating	Nom.		dBA	48	50	52		48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52							
	Heating	Ambient	Min.~Max.	°CWB	-20~18							
Refrigerant	Type/GWP				R-32/675							
	Charge			kg/TCO2Eq	3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas OD			mm	9.52/15.9							
	Piping length	OU - IU	Max.	m	55		85		55		85	
		System	Equivalent	m	75		100		75		100	
			Chargeless	m	40							
	Level difference	IU - OU	Max.	m	30							
	Additional refrigerant charge			kg/m	See installation manual							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	20		32		16			

Contains fluorinated greenhouse gases

Round flow cassette

360° air discharge for optimum efficiency and comfort

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs
- Two optional intelligent sensors improve energy efficiency and comfort
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Lowest installation height in the market: 214mm for class 20-63
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- Bigger flaps and unique swing pattern improve equal air distribution
- UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 675mm lift increases flexibility and installation speed



FCAG-B



RZAG-NV1_NY1




BRC1H52W BRP069C82



White panel



White auto cleaning panel



Black panel



Black design panel

More details and final information can be found by scanning or clicking the QR codes.

FCAG-B RZAG-A RZAG-NV1 RZAG-NY1

Efficiency data				**FCAG + RZAG**	**35B + 35A**	**50B + 50A**	**60B + 60A**	**71B + 71NV1**	**100B + 100NV1**	**125B + 125NV1**	**140B + 140NV1**	**71B + 71NY1**	**100B + 100NY1**	**125B + 125NY1**	**140B + 140NY1**
Cooling capacity	Nom.			kW	1.6/3.5/4.5	1.7/5.0/6.0	1.7/6.0/6.5	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-
Heating capacity	Nom./Max.			kW	1.40/4.00/5.00	1.50/5.80/6.00	1.60/7.00/7.50	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-
Space cooling	Energy efficiency class				A++					-		A++		-	
	Capacity		Pdesign	kW	3.50	5.00	6.00	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
	SEER				7.30	6.80	6.60	6.83	7.14	7.15	6.80	6.83	7.14	7.15	6.80
	ηs,c			%	-					283	269	-		283	269
	Annual energy consumption			kWh/a	168	257	318	348	466	1,016	1,182	348	466	1,016	1,182
Space heating (Average climate)	Energy efficiency class				A+					-		A+		-	
	Capacity		Pdesign	kW	3.30	4.30	4.60	4.70	7.80	9.52		4.70	7.80	9.52	
	SCOP/A				4.30		4.25	4.22	4.53	4.34		4.22	4.53	4.34	
	ηs,h			%	-					171		-		171	
	Annual energy consumption			kWh/a	1,074	1,398	1,515	1,560	2,413	3,071		1,560	2,413	3,071	

Indoor unit				**FCAG**	**35B**	**50B**	**60B**	**71B**	**100B**	**125B**	**140B**	**71B**	**100B**	**125B**	**140B**
Dimensions	Unit	HeightxWidthxDepth		mm	204x840x840				246x840x840			204x840x840	246x840x840		
Weight	Unit			kg	18	19		21	23			21	23		
Air filter	Type				Resin net										
Decoration panel	Model				Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black										
	Dimensions	HeightxWidthxDepth		mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950										
	Weight			kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5										
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	8.8/10.6/12.9	9.4/11.8/14.6	9.6/12.2/14.9	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2		10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2	
		Heating	Low/Medium/High	m^3/min	9.4/11.6/14.1	9.4/11.8/14.6	9.6/12.2/14.9	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0		10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0	
Sound power level	Cooling			dBA	49.0		51.0		54.0	58.0		51.0	54.0	58.0	
	Heating			dBA	49.0		51.0		54.0	58.0		51.0	54.0	58.0	
Sound pressure level	Cooling	Low/High		dBA	27.0/31.0		28.0/33.0	28.0/35.0	29.0/37.0	29.0/41.0		28.0/35.0	29.0/37.0	29.0/41.0	
	Heating	Low/High		dBA	27.0/31.0		28.0/33.0		29.0/37.0	29.0/41.0		28.0/33.0	29.0/37.0	29.0/41.0	
Control systems	Infrared remote control				BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB										
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52										
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220										
Piping connections	Drain				VP25 (O.D. 32 / I.D. 25)										

Outdoor unit				**RZAG**	**35A**	**50A**	**60A**	**71NV1**	**100NV1**	**125NV1**	**140NV1**	**71NY1**	**100NY1**	**125NY1**	**140NY1**
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373			870x1,100x460							
Weight	Unit			kg	52			81	85	95		81	85	94	
Sound power level	Cooling			dBA	62.0	63.0	64.0	64	66	69	70	64	66	69	70
	Heating			dBA	62.0	63.0	64.0	-		68	71	-		68	71
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0	46	47	49	50	46	47	49	50
	Heating	Nom.		dBA	48.0	49.0	50.0	48	50	52		48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52			-20~52							
	Heating	Ambient	Min.~Max.	°CWB	-20~24			-20~18							
Refrigerant	Type/GWP				R-32/675.0			R-32/675							
	Charge			kg/TCO2Eq	1.55/1.05			3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas	OD		mm	6.35/9.52	6.35/12.7		9.52/15.9							
	Piping length	OU - IU	Max.	m	50			55		85		55		85	
		System	Equivalent	m	-			75		100		75		100	
			Chargeless	m	30			40							
	Level difference	IU - OU	Max.	m	30.0			30							
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)			See installation manual							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240							3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	-			20		32		16			

Contains fluorinated greenhouse gases

ROUND FLOW UV STREAMER

SkyAir Advance-series BLUEVOLUTION

Round flow cassette

360° air discharge for optimum efficiency and comfort

- Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- Two optional intelligent sensors improve energy efficiency and comfort
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- Bigger flaps and unique swing pattern improve equal air distribution
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 675mm lift increases flexibility and installation speed



FCAG-B



RZASG100-140MV(1)/MY(1)




BRC1H52W, BRP069C82



White panel



White auto cleaning panel



Black panel



Black design panel

More details and final information can be found by scanning or clicking the QR codes.

FCAG-B RZASG-MV1 RZASG-MY1 RZASG-MV RZASG-MY

Efficiency data				FCAG + RZASG	71B + 71MV1	100B + 100MV(1)	125B + 125MV(1)	140B + 140MV(1)	100B + 100MY(1)	125B + 125MY(1)	140B + 140MY(1)
Cooling capacity	Nom.			kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Nom.			kW	7.50	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class				A++		-		A++	-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER				6.47	6.55	5.76	6.53	6.55	5.76	6.53
	ηs,c			%	-		227	258	-	227	258
	Annual energy consumption			kWh/a	368	507	1,261	1,231	507	1,261	1,231
Space heating (Average climate)	Energy efficiency class				A+		-		A+	-	
	Capacity		Pdesign	kW	4.50	6.00		7.80	6.00		7.80
	SCOP/A				4.10	4.17	4.05	4.31	4.17	4.05	4.31
	ηs,h			%	-		159	169	-	159	169
	Annual energy consumption			kWh/a	1,537	2,016	2,074	2,534	2,016	2,074	2,534

Indoor unit				FCAG	71B	100B	125B	140B	100B	125B	140B
Dimensions	Unit	HeightxWidthxDepth		mm	204x840x840	246x840x840					
Weight	Unit			kg	21	23					
Air filter	Type				Resin net						
Decoration panel	Model				Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black						
	Dimensions	HeightxWidthxDepth		mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950						
	Weight			kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5						
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2		13.0/17.8/22.7	13.1/20.4/27.2	
		Heating	Low/Medium/High	m^3/min	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0		13.2/18.1/23.0	13.0/20.2/27.0	
Sound power level	Cooling			dBA	51.0	54.0	58.0		54.0	58.0	
	Heating			dBA	51.0	54.0	58.0		54.0	58.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	28.0/31.0/35.0	29.0/33.0/37.0	29.0/35.0/41.0		29.0/33.0/37.0	29.0/35.0/41.0	
	Heating	Low/Medium/High		dBA	28.0/31.0/33.0	29.0/33.0/37.0	29.0/35.0/41.0		29.0/33.0/37.0	29.0/35.0/41.0	
Control systems	Infrared remote control				BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB						
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220						

Outdoor unit				RZASG	71MV1	100MV(1)	125MV(1)	140MV(1)	100MY(1)	125MY(1)	140MY(1)
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320	990x940x320					
Weight	Unit			kg	60	70 (MV1) / 72 (MV)		78 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)
Sound power level	Cooling			dBA	65	70	71	73	70	71	73
	Heating			dBA	-		71	73	-	71	73
Sound pressure level	Cooling	Nom.		dBA	46	53		54	53		54
	Heating	Nom.		dBA	47	57					
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~46						
	Heating	Ambient	Min.~Max.	°CWB	-15~15.5						
Refrigerant	Type/GWP				R-32/675						
	Charge			kg/TCO2Eq	2.45/1.65	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	50						
		System	Equivalent	m	70						
			Chargeless	m	30						
	Additional refrigerant charge			kg/m	See installation manual						
	Level difference	IU - OU	Max.	m	30.0						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	20	25	32		16		

Contains fluorinated greenhouse gases

ROUND FLOW UV STREAMER SkyAir Active-series BLUEVOLUTION

Round flow cassette

360° air discharge for optimum efficiency and comfort

- Ideal solution for small businesses and shops
- Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- Two optional intelligent sensors improve energy efficiency and comfort
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Bigger flaps and unique swing pattern improve equal air distribution
- UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 675mm lift increases flexibility and installation speed



FCAG-B



AZAS100-140MV1_MY1




BRC1H52W, BRP069C82



White panel



White auto cleaning panel



Black panel



Black design panel

More details and final information can be found by scanning or clicking the QR codes.

FCAG-B ARXM-R AZAS-MV AZAS-MY

Efficiency data				FCAG + ARXM / AZAS	71B + ARXM 71R	100B + AZAS100MV	125B + AZAS125MV	140B + AZAS140MV	100B + AZAS100MY	125B + AZAS125MY	140B + AZAS140MY
Cooling capacity	Nom.			kW	6.80/7.05	9.50/-	12.1/-	13.4/-	9.50/-	12.1/-	13.4/-
Heating capacity	Nom./Max.			kW	7.50/7.58	10.8/-	13.5/-	15.5/-	10.8/-	13.5/-	15.5/-
Space cooling	Energy efficiency class				A+		-		A+		-
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.0	9.50	12.1	13.0
	SEER				5.87	6.1	5.6	6.2	6.1	5.6	6.2
	ηs,c			%	-		221	245	-	221	245
	Annual energy consumption			kWh/a	405	586	1,345	1,300	586	1,345	1,300
Space heating (Average climate)	Energy efficiency class				A+	A	-		A	-	
	Capacity		Pdesign	kW	4.50	6.00		7.80	6.00		7.80
	SCOP/A				4.00	3.85	3.80	4.31	3.85	3.80	4.31
	ηs,h			%	-		149	169	-	149	169
	Annual energy consumption			kWh/a	1,573	2,182	2,211	2,534	2,182	2,211	2,534

Indoor unit				FCAG	71B	100B	125B	140B	100B	125B	140B
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840	246x840x840						
Weight	Unit		kg	21	23						
Air filter	Type			Resin net							
Decoration panel	Model			Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black							
	Dimensions	HeightxWidthxDepth	mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950							
	Weight		kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5							
Fan	Air flow rate	Cooling	Low/Medium/High m^3/min	10.8/13.0/15.1	13.0/17.8/22.7	13.1/20.4/27.2		13.0/17.8/22.7		13.1/20.4/27.2	
		Heating	Low/Medium/High m^3/min	10.8/12.9/15.1	13.2/18.1/23.0	13.0/20.2/27.0		13.2/18.1/23.0		13.0/20.2/27.0	
Sound power level	Cooling		dBA	51.0	54.0	58.0		54.0		58.0	
	Heating		dBA	51.0	54.0	58.0		54.0		58.0	
Sound pressure level	Cooling	Low/Medium/High	dBA	28.0/31.0/35.0	29.0/33.0/37.0	29.0/35.0/41.0		29.0/33.0/37.0		29.0/35.0/41.0	
	Heating	Low/Medium/High	dBA	28.0/31.0/33.0	29.0/33.0/37.0	29.0/35.0/41.0		29.0/33.0/37.0		29.0/35.0/41.0	
Control systems	Infrared remote control			BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB							
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220							

Outdoor unit				ARXM / AZAS	ARXM71R	AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY
Dimensions	Unit	HeightxWidthxDepth	mm	734x954x401	990x940x320						
Weight	Unit		kg	49.0	72			79	72		79
Sound power level	Cooling		dBA	-	70	71		73	70	71	73
	Heating		dBA	-		71		73	-	71	73
Sound pressure level	Cooling	Nom.	dBA	52.0	53			54	53		54
	Heating	Nom.	dBA	52.0	57						
Operation range	Cooling	Ambient Min.~Max.	°CDB	-10~46							
	Heating	Ambient Min.~Max.	°CWB	-15~24	-15~15.5						
Refrigerant	Type/GWP			R-32/675							
	Charge		kg/TCO2Eq	1.15/0.780	2.60/1.76			2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas OD		mm	9.52/15.9							
	Piping length	OU - IU	Max. m	30							
		System	Equivalent m	50							
			Chargeless m	30							
	Additional refrigerant charge		kg/m	0.035 (for piping length exceeding 10m)	See installation manual						
	Level difference IU - OU	Max.	m	20.0	30.0						
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240					3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A	-	25		32		16		

Contains fluorinated greenhouse gases

Round flow cassette

360° air discharge for optimum efficiency and comfort

- Combination with split outdoor units is ideal for small retail, offices or residential applications
- Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- Two optional intelligent sensors improve energy efficiency and comfort
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- Bigger flaps and unique swing pattern improve equal air distribution
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy and hygenic indoor environment
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 675mm lift increases flexibility and installation speed




White panel | White auto cleaning panel | Black panel | Black design panel

More details and final information can be found by scanning or clicking the QR codes.

FCAG-B | RXM-R | RXM-R9 | RXM-A

Efficiency data				FCAG + RXM	35B + 35R9	50B + 50A	60B + 60R
Cooling capacity	Nom.			kW	3.50	5.00	5.70
Heating capacity	Nom.			kW	4.20	6.00	7.00
Space cooling	Energy efficiency class				A++	A++	
	Capacity		Pdesign	kW	3.50	5.00	5.70
	SEER				6.35	6.54	6.40
	Annual energy consumption			kWh/a	193	268	312
Space heating (Average climate)	Energy efficiency class				A++	A+	
	Capacity		Pdesign	kW	3.32	4.36	4.71
	SCOP/A				4.90	4.30	4.20
	Annual energy consumption			kWh/a	948	1,418	1,569

Indoor unit				FCAG	35B	50B	60B
Dimensions	Unit	HeightxWidthxDepth		mm	204x840x840		
Weight	Unit			kg	18	19	
Air filter	Type				Resin net		
Decoration panel	Model				Standard panels: BYCQ140E - white with grey louvers / BYCQ140EW - full white / BYCQ140EB - black Auto cleaning panels: BYCQ140EGF - white / BYCQ140EGFB - black Designer panels: BYCQ140EP - white / BYCQ140EPB - black		
	Dimensions	HeightxWidthxDepth		mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950		
	Weight			kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5		
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	8.8/10.6/12.9	9.4/11.8/14.6	9.6/12.2/14.9
		Heating	Low/Medium/High	m^3/min	9.4/11.6/14.1	9.4/11.8/14.6	9.6/12.2/14.9
Sound power level	Cooling			dBA	49.0	49.0	51.0
	Heating			dBA	49.0	49.0	51.0
Sound pressure level	Cooling	Low/Medium/High		dBA	27.0/29.0/31.0		28.0/31.0/33.0
	Heating	Low/Medium/High		dBA	27.0/29.0/31.0		28.0/31.0/33.0
Control systems	Infrared remote control				BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB		
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220		

Outdoor unit				RXM	35R9	NEW 50A	60R
Dimensions	Unit	HeightxWidthxDepth		mm	552x840x350	734x954x401	
Weight	Unit			kg	32	49.0	
Sound pressure level	Cooling	Nom.		dBA	49.0	48.0	
	Heating	Nom.		dBA	49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46		
	Heating	Ambient	Min.~Max.	°CWB	-15~18		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg/TCO2Eq	0.76/0.52	1.15/0.780	
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	9.50	12.7	
	Piping length	OU - IU	Max.	m	20	30	
		System	Chargeless	m	10		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	m	15	20.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	13	16	

Contains fluorinated greenhouse gases

Fully Flat Cassette

Design & Genius in one



Why choose fully flat cassette

› Unique design in the market that integrates fully flat into the ceiling

› Advanced technology and top efficiency combined

› Most quiet cassette available on the market

FFA-A9 / FXZQ-A



Choice between grey or white panel

Benefits for the installer


› Unique product in the market!
› Most quiet unit (25dBA)
› The user-friendly remote control, available in several languages, enables the easy set-up of sensor option and control of the individual flap position
› Meeting European design taste.


Benefits for the consultant

› Unique product in the market!
› Blends seamlessly in any modern office interior design
› Ideal product to improve BREEAM score/EPBD in combination with Sky Air (FFA*) or VRV IV heat pump units (FXZQ*).

Benefits for the end user


› Engineering excellence and unique design in one
› Most quiet unit (25dBA)
› Perfect working conditions: no more cold draughts
› Save up to 27% on your energy bill thanks to the optional sensors
› Flexible usage of space and suits any room configuration thanks to individual flap control
› User-friendly remote control, available in several languages.

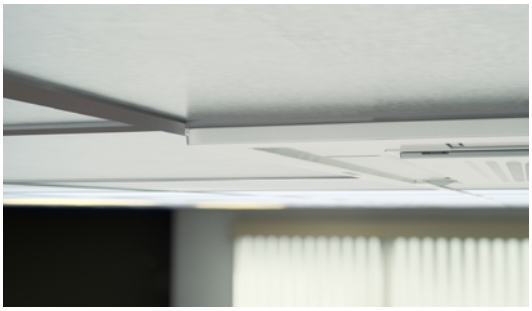


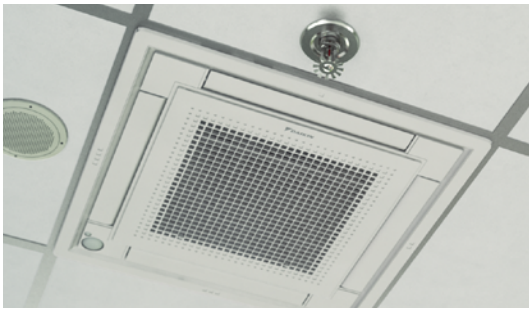

Unique design

› Designed by a European design office to fully meet the European taste.
› Fully flat into the ceiling, leaving only 8mm.
› Fully integrated in the one ceiling tile, enabling lights, speakers and sprinklers to be installed in adjoining ceiling tiles.
› Decoration panel available in 2 colours (white and white-silver).

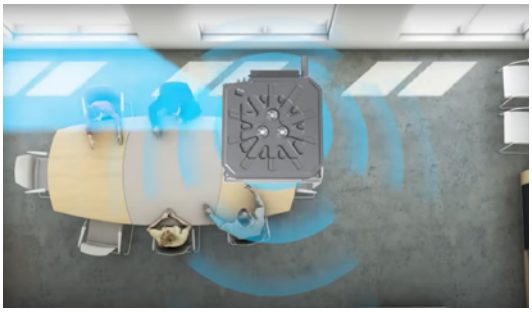

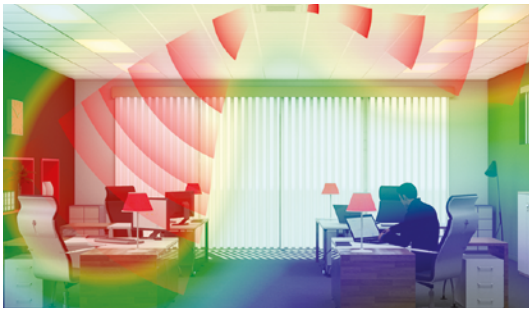


Differentiating in technology

Optional presence sensor
› When the room is empty, it can adjust the set temperature or switch off the unit – saving energy.
› When people are detected, the direction of the airflow is adapted to avoid cold draughts being directed towards occupants.

Optional floor sensor
› Detects the temperature difference and re-directs the airflow to ensure even temperature distribution.



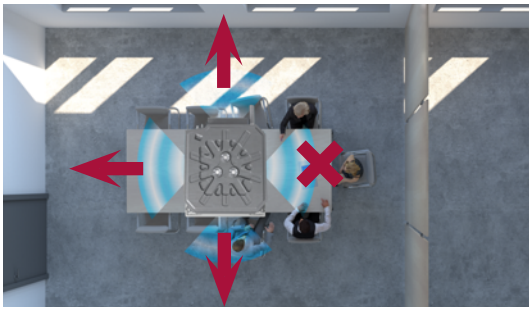

Top efficiency

› Seasonal efficiency labels up to A++*
› When the room is empty, the sensor option can adjust the set temperature or switch off the unit – saving up to 27% energy.

* for FFA25,35A9 in combination with RXM25,35

Other benefits

› Individual flap control: easily control one or more flaps via the wired remote controller (BRC1E/BRC1H) when rearranging the room. When fully closing or blocking the flaps, the option "Sealing member of air discharge outlet" is needed.
› Most silent cassette in the market (25dBA), important for office applications.


Marketing tools

› https://www.daikin.eu/en_us/product-group/fully-flat-cassette.html
› www.youtube.com/DaikinEurope

Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- Two optional intelligent sensors improve energy efficiency and comfort
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 630mm lift increases flexibility and installation speed

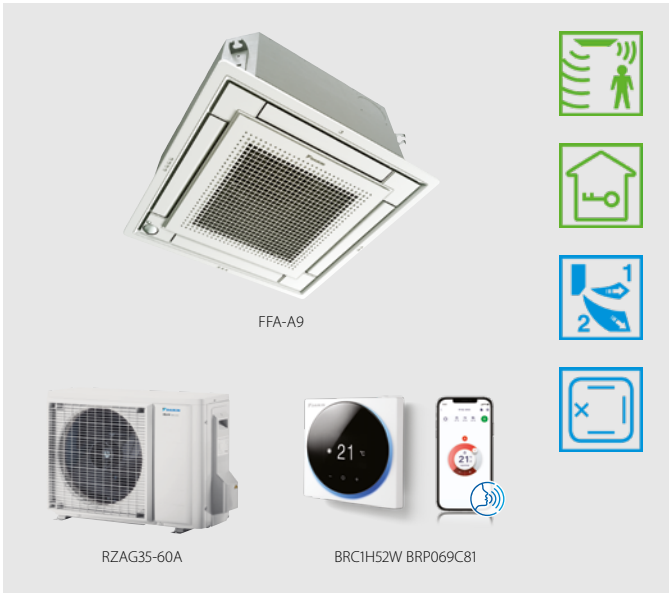

More details and final information can be found by scanning or clicking the QR codes.

FFA-A9 RZAG-A

Efficiency data				**FFA + RZAG**	**35A9 + 35A**	**50A9 + 50A**	**60A9 + 60A**
Cooling capacity	Min./Nom./Max.			kW	1.6/3.5/4.5	1.7/5.0/6.0	1.7/6.0/6.5
Heating capacity	Min./Nom./Max.			kW	1.40/4.00/5.00	1.50/5.80/6.00	1.60/7.00/7.50
Space cooling	Energy efficiency class				A++		A+
	Capacity		Pdesign	kW	3.50	5.00	6.00
	SEER				6.40	6.30	5.80
	Annual energy consumption			kWh/a	191	278	362
Space heating (Average climate)	Energy efficiency class				A	A+	
	Capacity		Pdesign	kW	4.20	4.30	4.50
	SCOP/A				3.80	4.01	4.04
	Annual energy consumption			kWh/a	1,546	1,501	1,558

Indoor unit				**FFA**	**35A9**	**50A9**	**60A9**
Dimensions	Unit	HeightxWidthxDepth		mm	260x575x575		
Weight	Unit			kg	16.0	17.5	
Air filter	Type				Resin net		
Decoration panel	Model				BYFQ60C2W1W / BYFQ60C2W1S / BYFQ60B2W1 / BYFQ60B3W1		
	Colour				White (N9.5)/SILVER/White (RAL9010)/WHITE (RAL9010)		
	Dimensions	HeightxWidthxDepth		mm	46x620x620 / 46x620x620 / 55x700x700 / 55x700x700		
	Weight			kg	2.8/2.8/2.7/2.7		
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	6.5/8.5/10.0	8.6/10.9/12.7	9.5/12.5/14.5
		Heating	Low/Medium/High	m^3/min	6.5/8.5/10.0	8.6/10.9/12.7	9.5/12.5/14.5
Sound power level	Cooling			dBA	51.0	56.0	60.0
Sound pressure level	Cooling	Low/Medium/High		dBA	25.0/30.5/34.0	27.0/34.0/39.0	32.0/40.0/43.0
	Heating	Low/Medium/High		dBA	25.0/30.5/34.0	27.0/34.0/39.0	32.0/40.0/43.0
Control systems	Infrared remote control				BRC7EB530W (standard panel) / BRC7F530W (white panel) / BRC7F530S (grey panel)		
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		

Outdoor unit				**RZAG**	**35A**	**50A**	**60A**
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373		
Weight	Unit			kg	52		
Sound power level	Cooling			dBA	62.0	63.0	64.0
	Heating			dBA	62.0	63.0	64.0
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0
	Heating	Nom.		dBA	48.0	49.0	50.0
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52		
	Heating	Ambient	Min.~Max.	°CWB	-20~24		
Refrigerant	Type/GWP				R-32/675.0		
	Charge			kg/TCO2Eq	1.55/1.05		
Piping connections	Liquid/Gas OD			mm	6.35/9.52	6.35/12.7	
	Piping length	OU - IU	Max.	m	50		
		System	Chargeless	m	30		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)		
	Level difference	IU - OU	Max.	m	30.0		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		

Contains fluorinated greenhouse gases

Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- Combination with split outdoor units is ideal for small retail, offices and residential applications
- Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- Unified indoor unit range for R-32 and R-410A
- Two optional intelligent sensors improve energy efficiency and comfort
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Optional fresh air intake
- Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- Standard drain pump with 630mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

FFA-A9 RXM-R RXM-R9 RXM-A

Efficiency data					FFA + RXM	25A9 + 25R9	35A9 + 35R9	50A9 + 50A	60A9 + 60R
Cooling capacity	Nom.			kW		2.50	3.40	5.00	5.70
Heating capacity	Nom.			kW		3.20	4.20	5.80	7.00
Power input	Cooling	Nom.		kW		0.55	0.89	1.54	1.86
	Heating	Nom.		kW		0.82	1.20	1.66	2.05
Space cooling	Energy efficiency class					A++		A+	
	Capacity	Pdesign		kW		2.50	3.40	5.00	5.70
	SEER					6.17	6.38	5.98	5.76
	Annual energy consumption			kWh/a		142	186	293	346
Space heating (Average climate)	Energy efficiency class					A+		A	A+
	Capacity	Pdesign		kW		2.31	3.10	3.84	3.96
	SCOP/A					4.24	4.10	3.90	4.04
	Annual energy consumption			kWh/a		762	1,058	1,378	1,373
Nominal efficiency	EER					4.57	3.81	3.24	3.05
	COP					3.90	3.50	3.49	3.41
	Annual energy consumption			kWh		273	446	772	931
	Energy labeling Directive	Cooling/Heating				A/A	A/B		B/B

Indoor unit					FFA	25A9	35A9	50A9	60A9
Dimensions	Unit	HeightxWidthxDepth		mm		260x575x575			
Weight	Unit			kg		16.0		17.5	
Air filter	Type					Resin net			
Decoration panel	Model					BYFQ60C2W1W / BYFQ60C2W1S / BYFQ60B2W1 / BYFQ60B3W1			
	Colour					White (N9.5)/SILVER/White (RAL9010)/WHITE (RAL9010)			
	Dimensions	HeightxWidthxDepth		mm		46x620x620 / 46x620x620 / 55x700x700 / 55x700x700			
	Weight			kg		2.8/2.8/2.7/2.7			
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min		6.5/8.0/9.0	6.5/8.5/10.0	8.6/10.9/12.7	9.5/12.5/14.5
		Heating	Low/Medium/High	m^3/min		6.5/8.0/9.0	6.5/8.5/10.0	8.6/10.9/12.7	9.5/12.5/14.5
Sound power level	Cooling			dBA		48.0	51.0	56.0	60.0
Sound pressure level	Cooling	Low/Medium/High		dBA		25.0/28.5/31.0	25.0/30.5/34.0	27.0/34.0/39.0	32.0/40.0/43.0
	Heating	Low/Medium/High		dBA		25.0/28.5/31.0	25.0/30.5/34.0	27.0/34.0/39.0	32.0/40.0/43.0
Control systems	Infrared remote control					BRC7EB530W (standard panel) / BRC7F530W (white panel) / BRC7F530S (grey panel)			
	Wired remote control					BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240			


Outdoor unit					RXM	25R9	35R9	NEW 50A	60R
Dimensions	Unit	HeightxWidthxDepth		mm		552x840x350		734x954x401	
Weight	Unit			kg		32		49.0	
Sound pressure level	Cooling	Nom.		dBA		46.0	49.0	48.0	
	Heating	Nom.		dBA		47.0		49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~46			
	Heating	Ambient	Min.~Max.	°CWB		-15~18			
Refrigerant	Type					R-32			
	GWP					675		675.0	
	Charge			kg/TCO2Eq		0.76/0.52		1.15/0.780	
Piping connections	Liquid	OD		mm		6.35			
	Gas	OD		mm		9.52		12.7	
	Piping length	OU - IU	Max.	m		20		30	
		System	Chargeless	m		10			
	Additional refrigerant charge			kg/m		0.02 (for piping length exceeding 10m)			
	Level difference	IU - OU	Max.	m		15		20.0	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240			
Current - 50Hz	Maximum fuse amps (MFA)			A		13		16	

Contains fluorinated greenhouse gases




Auto cleaning filter
for concealed ceiling units

The unique automatic cleaning filter achieves higher efficiency and comfort with lower maintenance costs

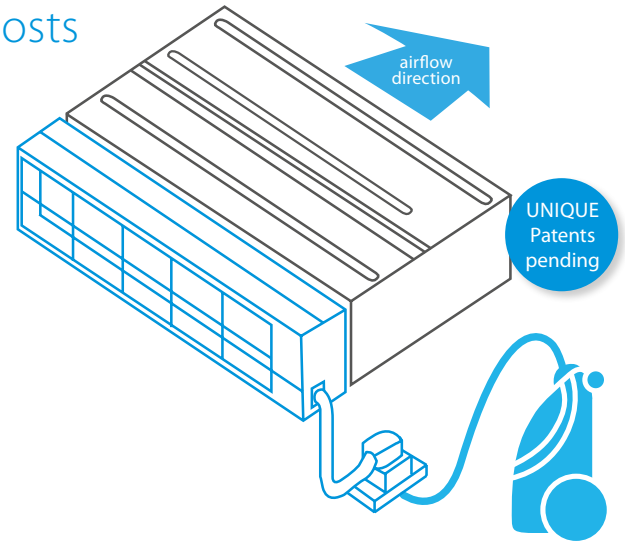

Reduce running costs
› Automatic filter cleaning ensures low maintenance costs because the filter is always clean

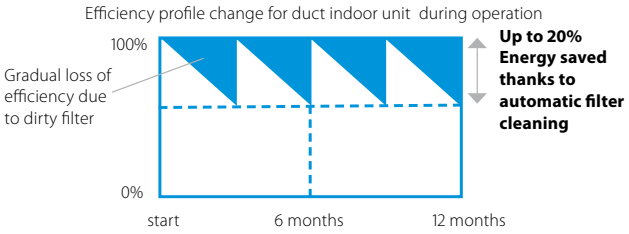

Minimal time required for filter cleaning
› The dust box can be emptied with a vacuum cleaner for fast and easy cleaning
› No more dirty ceilings

Improved indoor air quality
› Optimum airflow eliminates draft and insulates sound

Superb reliability
› Prevents clogged filters for seamless operation

Unique technology
› Unique and innovative filter technology inspired by the Daikin auto cleaning cassette



How does it work?

1. **Scheduled automatic filter cleaning**
2. **Dust collects in a dust box that's integrated into the unit**
3. **The dust can easily be removed with a vacuum cleaner**

youtube.com/DaikinEurope

Combination table

	Split / Sky Air				VRV						
	FDXM-F9				FXDA-A/FXDQ-A3						
	25	35	50	60	15	20	25	32	40	50	63
BAE20A62	•	•			•	•	•	•			
BAE20A82									•	•	
BAE20A102			•	•							•

Specifications

	BAE20A62	BAE20A82	BAE20A102
Height (mm)	210		
Width (mm)	830	1,030	1,230
Depth (mm)	188		



Multi zoning kit

for concealed ceiling units

Easy selection via our NEW software!

The multi-zoning system is a room-by-room controller. It is fitted with motorised dampers, which immediately adapt using Daikin ducted solutions. This system supports control of up to 8 zones via a centralised thermostat located in the main room and individual thermostats for each of the zones.

Benefits


Increased comfort

› Increases comfort levels by allowing more individual zone control
  - Up to 8 individual zones can be served thanks to separate modulating dampers
  - Individual thermostat for room-by-room or zone-by-zone control

Easy to install

› Automatic air flow adjustment according to the demand
› Easy to install, integrates with the Daikin indoor units and system controls
› Time saving as plenum comes fully pre-assembled with dampers, and control boards
› Reduces the amount of refrigerant required in the installation

How does it work?

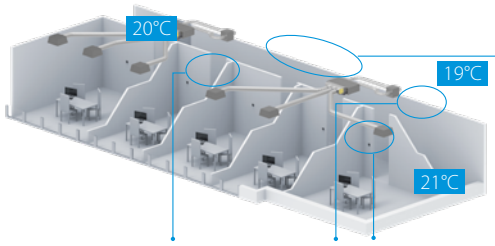



Zoning box: fully pre-assembled plenum with dampers

Individual zone thermostats

Bluezero - Airzone Main Thermostat
› Color graphic interface for controlling zones



AZCE6BLUEZEROCB (Wired)

Airzone Zone Thermostat
› Graphic interface with low-energy e-ink screen for controlling zones



AZCE6THINKRB (Wireless)

Airzone Zone Thermostat
› Thermostat with buttons for controlling the temperature



AZCE6LITECB (Wired)
AZCE6LITERB (Wireless)

Compatibility

Number of motorised dampers		Reference	Dimensions H x W x D (mm)	Ø (mm)	SkyAir FDXM-F9 25	35	50	60	SkyAir FBA-A(9) 35	50	60	71	100	125	140	SkyAir ADEA-A 71	100	125	VRV IV+ FXDQ-A3 15	20	25	32	40	50	63	VRV IV+ FXSQ-A 15	20	25	32	40	50	63	80	100	125	140
Standard plenum																																			
	2	AZEZ6DAIST07XS2	300 x 930 x 454	200																						•	•	•	•						
		AZEZ6DAIST07S2							•	•																				•	•					
	3	AZEZ6DAIST07XS3																								•	•	•	•						
		AZEZ6DAIST07S3							•	•																				•	•					
	4	AZEZ6DAIST07S4	300 x 1,140 x 454						•	•																				•	•					
		AZEZ6DAIST07M4									•	•				•																•	•			
	5	AZEZ6DAIST07M5	300 x 1,425 x 454								•	•				•																•	•			
		AZEZ6DAIST07L5											•	•	•		•	•																•	•	
	6	AZEZ6DAIST07M6	300 x 1,638 x 454								•	•				•																•	•			
		AZEZ6DAIST07L6											•	•	•		•	•																•	•	
	7	AZEZ6DAIST07L7	515 x 1,425 x 454										•	•	•		•	•																•	•	
		AZEZ6DAIST07XL7																																		•
	8	AZEZ6DAIST07L8											•	•	•		•	•																•	•	
		AZEZ6DAIST07XL8																																		•
Medium plenum																																			
	2	AZEZ6DAIBS07XS2	250 x 930 x 454	200																						•	•	•	•						
		AZEZ6DAIBS07S2							•	•																				•	•					
	3	AZEZ6DAIBS07XS3																								•	•	•	•						
		AZEZ6DAIBS07S3							•	•																				•	•					
		AZEZ6DAIBS07M3									•	•				•																•	•			
	4	AZEZ6DAIBS07S4	250 x 1,140 x 454						•	•																				•	•					
		AZEZ6DAIBS07M4									•	•				•																•	•			
		AZEZ6DAIBS07L4											•	•	•		•	•																•	•	
	5	AZEZ6DAIBS07S5	250 x 1,425 x 454						•	•																				•	•					
		AZEZ6DAIBS07M5									•	•				•																•	•			
		AZEZ6DAIBS07L5											•	•	•		•	•																•	•	
		AZEZ6DAIBS07XL5																																		•
	6	AZEZ6DAIBS07M6	250 x 1,638 x 454								•	•				•																•	•			
		AZEZ6DAIBS07L6											•	•	•		•	•																•	•	
		AZEZ6DAIBS07XL6																																		•
Slim plenum	2	AZEZ6DAISL01S2	210 x 720 x 444	200	•	•													•	•	•	•													
	3	AZEZ6DAISL01S3			•	•													•	•	•	•													
	4	AZEZ6DAISL01M4	210 x 930 x 444																				•	•											
	5	AZEZ6DAISL01L5	210 x 1,140 x 444				•	•																	•										

(1) Reversible units can be blocked to heating only via AZX6MCS module

For more information on options refer to page 932

SkyAir Alpha-series BLUEVOLUTION

Slim concealed ceiling unit

Compact concealed ceiling unit, with a height of only 200mm

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Invisible unit as the unit is concealed in the ceiling: only the suction and discharge grilles are visible
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths
- Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption

with auto cleaning and multi zoning option



More details and final information can be found by scanning or clicking the QR codes.

FDXM-F9 RZAG-A

Efficiency data				FDXM + RZAG	35F9 + 35A	50F9 + 50A	60F9 + 60A
Cooling capacity	Min./Nom./Max.			kW	1.6/3.5/4.5	1.7/5.0/6.0	1.7/6.0/6.5
Heating capacity	Min./Nom./Max.			kW	1.40/4.00/5.00	1.70/5.00/6.00	1.70/7.00/7.50
Space cooling	Energy efficiency class				A+		
	Capacity		Pdesign	kW	3.50	5.00	6.00
	SEER				5.90		5.70
	Annual energy consumption			kWh/a	208	296	368
Space heating (Average climate)	Energy efficiency class				A		
	Capacity		Pdesign	kW	3.50	4.30	4.50
	SCOP/A				3.90		
	Annual energy consumption			kWh/a	1,255	1,544	1,616

Indoor unit				FDXM	35F9	50F9	60F9
Dimensions	Unit	HeightxWidthxDepth		mm	200x750x620	200x1,150x620	
Weight	Unit			kg	21	28	
Air filter	Type				Removable / washable		
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	7.3/8.0/8.7	13.3/14.6/15.8	13.5/14.8/16.0
		Heating	Low/Medium/High	m^3/min	7.3/8.0/8.7	13.3/14.6/15.8	13.5/14.8/16.0
	External static pressure	Nom.		Pa	30	40	
Sound power level	Cooling			dBA	53.0	55.0	56.0
	Heating			dBA	53.0	55.0	56.0
Sound pressure level	Cooling	Low/High		dBA	27.0/35.0	30.0/38.0	
	Heating	Low/High		dBA	27.0/35.0	30.0/38.0	
Control systems	Infrared remote control				BRC4C65		
	Wired remote control				BRC1H52W/S/K, BRC1E53A/B/C, BRC1D52		

Outdoor unit				RZAG	35A	50A	60A
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373		
Weight	Unit			kg	52		
Sound power level	Cooling			dBA	62.0	63.0	64.0
	Heating			dBA	62.0	63.0	64.0
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0
	Heating	Nom.		dBA	48.0	49.0	50.0
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52		
	Heating	Ambient	Min.~Max.	°CWB	-20~24		
Refrigerant	Type/GWP				R-32/675.0		
	Charge			kg/TCO2Eq	1.55/1.05		
Piping connections	Liquid/Gas OD			mm	6.35/9.52	6.35/12.7	
	Piping length	OU - IU	Max.	m	50		
		System	Chargeless	m	30		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)		
	Level difference	IU - OU	Max.	m	30.0		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		

Contains fluorinated greenhouse gases

Slim concealed ceiling unit

Compact concealed ceiling unit, with a height of only 200mm

- Combination with split outdoor units is ideal for small retail, offices and residential applications
- Invisible unit as the unit is concealed in the ceiling: only the suction and discharge grilles are visible
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths
- Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet.

with auto cleaning and multi zoning option



FDXM25-35F9

RXM-R

BRC1H52W BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FDXM-F9 RXM-R RXM-R9 RXM-A

Efficiency data				FDXM + RXM	25F9 + 25R9	35F9 + 35R9	50F9 + 50A	60F9 + 60R
Cooling capacity	Nom.			kW	1.30/2.40/3.00	1.40/3.40/3.80	1.70/5.00/5.30	1.70/6.00/6.50
Heating capacity	Nom./Max.			kW	1.30/3.20/4.50	1.40/4.00/5.00	1.70/5.80/6.00	1.70/7.00/7.10
Space cooling	Energy efficiency class				A+	A	A+	A
	Capacity		Pdesign	kW	2.40	3.40	5.00	6.00
	SEER				5.68	5.26	5.77	5.56
	Annual energy consumption			kWh/a	148	226	303	378
Space heating (Average climate)	Energy efficiency class				A+	A	A	
	Capacity		Pdesign	kW	2.60	2.90	4.00	4.60
	SCOP/A				4.24	3.88	3.93	3.80
	Annual energy consumption			kWh/a	858	1,046	1,424	1,693

Indoor unit				FDXM	25F9	35F9	50F9	60F9
Dimensions	Unit	HeightxWidthxDepth		mm	200x750x620		200x1,150x620	
Weight	Unit			kg	21		28	
Air filter	Type				Removable/washable			
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	7.3/8.0/8.7		13.3/14.6/15.8	13.5/14.8/16.0
		Heating	Low/Medium/High	m^3/min	7.3/8.0/8.7		13.3/14.6/15.8	13.5/14.8/16.0
	External static pressure	Nom.		Pa	30		40	
Sound power level	Cooling			dBA	53.0		55.0	56.0
	Heating			dBA	53.0		55.0	56.0
Sound pressure level	Cooling	Low/High		dBA	27.0/35.0		30.0/38.0	
	Heating	Low/High		dBA	27.0/35.0		30.0/38.0	

							NEW	
Outdoor unit				**RXM**	**25R9**	**35R9**	**50A**	**60R**
Dimensions	Unit	HeightxWidthxDepth		mm	552x840x350		734x954x401	
Weight	Unit			kg	32		49.0	
Sound pressure level	Cooling	Nom.		dBA	46.0	49.0	48.0	
	Heating	Nom.		dBA	47.0	49.0	49.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46			
	Heating	Ambient	Min.~Max.	°CWB	-15~18			
Refrigerant	Type				R-32		R-32	
	GWP				675		675.0	
	Charge			kg/TCO2Eq	0.76/0.52		1.15/0.780	
Piping connections	Liquid	OD		mm	6.35			
	Gas	OD		mm	9.50		12.7	
	Piping length	OU - IU	Max.	m	20		30	
		System	Chargeless	m	10		10	
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		0.02 (for piping length exceeding 10m)	
	Level difference	IU - OU	Max.	m	15		20.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)			A	13		16	


Contains fluorinated greenhouse gases

SkyAir Alpha-series BLUEVOLUTION

Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- Low operation sound level down to 25dBA
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- Optional fresh air intake
- Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles
- Standard built-in drain pump with 625mm lift increases flexibility and installation speed

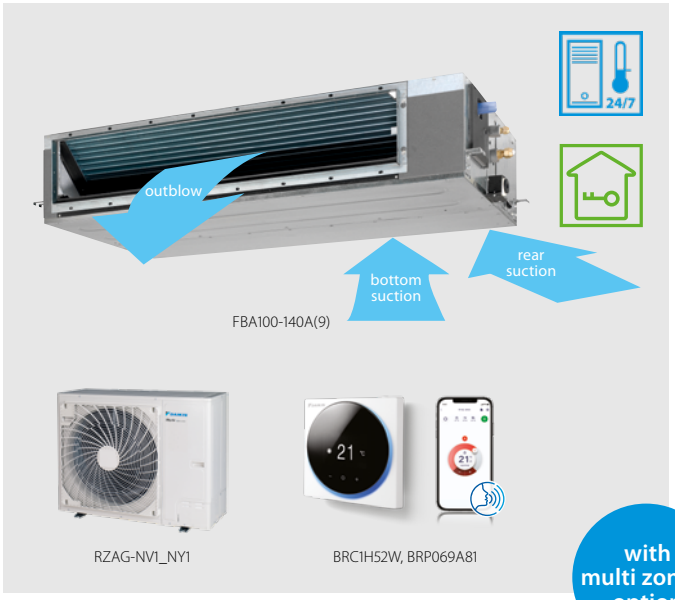

More details and final information can be found by scanning or clicking the QR codes.

FBA-A(9) RZAG-A RZAG-NV1 RZAG-NY1

Efficiency data				FBA + RZAG	35A9+35A	50A9+50A	60A9+60A	71A9+71NV1	100A+100NV1	125A+125NV1	140A+140NV1	71A9+71NY1	100A+100NY1	125A+125NY1	140A+140NY1
Cooling capacity	Min./Nom./Max.			kW	1.6/3.5/5.0	1.7/5.0/6.0	1.7/6.0/7.0	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-
Heating capacity	Min./Nom./Max.			kW	1.40/4.00/5.00	1.70/6.00/6.00	1.70/7.00/7.50	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-
Space cooling	Energy efficiency class				A++					-		A++		-	
	Capacity		Pdesign	kW	3.50	5.00	6.00	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
	SEER				6.12	6.30	6.15	6.50	6.47	6.56	6.42	6.50	6.47	6.56	6.42
	ηs,c			%	-					259	254	-		259	254
	Annual energy consumption			kWh/a	200	278	341	366	514	1,107	1,252	366	514	1,107	1,252
Space heating (Average climate)	Energy efficiency class				A+					-		A+		-	
	Capacity		Pdesign	kW	4.20	4.30	4.50	4.70	7.80	9.52		4.70	7.80	9.52	
	SCOP/A				4.10			4.20	4.36	4.37	4.34	4.20	4.36	4.37	4.34
	ηs,h			%	-					172	171	-		172	171
	Annual energy consumption			kWh/a	1,434	1,469	1,537	1,566	2,505	3,050	3,070	1,566	2,505	3,050	3,070

Indoor unit				FBA	35A9	50A9	60A9	71A9	100A	125A	140A	71A9	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	245x700x800		245x1,000x800		245x1,400x800			245x1,000x800	245x1,400x800		
Weight	Unit			kg	28.0		35.0		46.0			35.0	46.0		
Air filter	Type				Resinnet										
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	10.5/12.5/15.0		12.5/15.0/18.0		23.0/26.0/29.0	23.5/29.0/34.0		12.5/15.0/18.0	23.0/26.0/29.0	23.5/29.0/34.0	
		Heating	Low/Medium/High	m^3/min	10.5/12.5/15.0		12.5/15.0/18.0		23.0/26.0/29.0	23.5/29.0/34.0		12.5/15.0/18.0	23.0/26.0/29.0	23.5/29.0/34.0	
	External static pressure	Nom./High		Pa	30/150				40/150	50/150		30/150	40/150	50/150	
Sound power level	Cooling			dBA	60.0		56.0		58.0	62.0		56.0	58.0	62.0	
Sound pressure level	Cooling	Low/High		dBA	29.0/35.0		25.0/30.0		30.0/34.0	32.0/37.0		25.0/30.0	30.0/34.0	32.0/37.0	
	Heating	Low/High		dBA	29.0/37.0		25.0/31.0		30.0/36.0	32.0/38.0		25.0/31.0	30.0/36.0	32.0/38.0	
Control systems	Infrared remote control				BRC4C65 / BRC4C66										
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52										
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220										
Piping connections	Drain				VP20 (I.D. 20/O.D. 26)										
Drain-up height				mm	625										

Outdoor unit				RZAG	35A	50A	60A	71NV1	100NV1	125NV1	140NV1	71NY1	100NY1	125NY1	140NY1
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373			870x1,100x460							
Weight	Unit			kg	52			81	85	95		81	85	94	
Sound power level	Cooling			dBA	62.0	63.0	64.0	64	66	69	70	64	66	69	70
	Heating			dBA	62.0	63.0	64.0	-		68	71	-		68	71
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0	46	47	49	50	46	47	49	50
	Heating	Nom.		dBA	48.0	49.0	50.0	48	50	52		48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20 ~ 52			-20 ~52							
	Heating	Ambient	Min.~Max.	°CWB	-20 ~ 24			-20 ~18							
Refrigerant	Type/GWP				R-32/675.0			R-32/675							
	Charge			kg/TCO2Eq	1.55/1.05			3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas	OD		mm	6.35/9.52	6.35/12.7		9.52/15.9							
	Piping length	OU - IU	Max.	m	50			55	85			55	85		
		System	Equivalent	m	-			75	100			75	100		
			Chargeless	m	30			40							
	Level difference	IU - OU	Max.	m	30.0			30							
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)			See installation manual							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240							3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	-			20	32			16			


Contains fluorinated greenhouse gases

Sky Air Advance-series
BLUEVOLUTION

Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- Low operation sound level down to 25dBA
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume

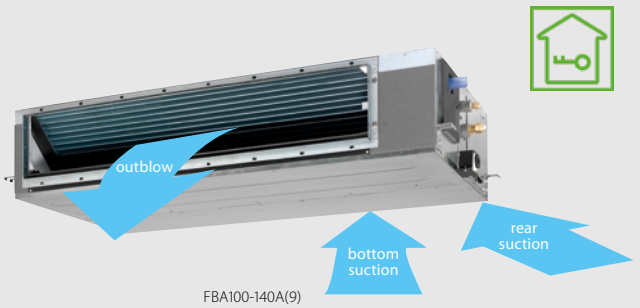

FBA100-140A(9)


RZASG100-140MV(1)/MY(1)


BRC1H52W BRP069C81


with multi zoning option

Optimised supply air volume

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.

FBA-A(9) RZASG-MV1 RZASG-MY1 RZASG-MV RZASG-MY

Efficiency data				FBA + RZASG	71A9 + 71MV1	100A + 100MV(1)	125A + 125MV(1)	140A + 140MV(1)	100A + 100MY(1)	125A + 125MY(1)	140A + 140MY(1)
Cooling capacity	Nom.			kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Nom.			kW	7.50	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class				A++	A+	-		A+	-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER				6.19	5.83	5.49	5.81	5.83	5.49	5.81
	ηs,c			%	-		217	229	-	217	229
	Annual energy consumption			kWh/a	385	570	1,322	1,384	570	1,322	1,384
Space heating (Average climate)	Energy efficiency class				A+	A	-		A	-	
	Capacity		Pdesign	kW	4.50	6.00		7.80	6.00		7.80
	SCOP/A				4.01	3.85	3.63	3.85		3.63	3.85
	ηs,h			%	-		142	151	-	142	151
	Annual energy consumption			kWh/a	1,571	2,182	2,314	2,836	2,182	2,314	2,836

Indoor unit				FBA	71A9	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth	mm	245x1,000x800	245x1,400x800						
Weight	Unit		kg	35.0	46.0						
Air filter	Type			Resin net							
Fan	Air flow rate	Cooling Low/Medium/High	m³/min	12.5/15.0/18.0	20.0/24.5/29.0		23.5/29.0/34.0		20.0/24.5/29.0	23.5/29.0/34.0	
		Heating Low/Medium/High	m³/min	12.5/15.0/18.0	20.0/24.5/29.0		23.5/29.0/34.0		20.0/24.5/29.0	23.5/29.0/34.0	
	External static pressure	Nom.	Pa	30	40		50		40	50	
Sound power level	Cooling		dBA	56.0	58.0		62.0		58.0	62.0	
Sound pressure level	Cooling	Low/Medium/High	dBA	25.0/28.0/30.0	30.0/32.0/34.0		32.0/35.0/37.0		30.0/32.0/34.0	32.0/35.0/37.0	
	Heating	Low/Medium/High	dBA	25.0/28.0/31.0	30.0/33.0/36.0		32.0/35.0/38.0		30.0/33.0/36.0	32.0/35.0/38.0	
Control systems	Infrared remote control			BRC4C65 / BRC4C66							
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220							

Outdoor unit				RZASG	71MV1	100MV(1)	125MV(1)	140MV(1)	100MY(1)	125MY(1)	140MY(1)
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320						
Weight	Unit		kg	60	70 (MY1) / 72 (MY)			78 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)
Sound power level	Cooling		dBA	65	70		71	73	70	71	73
	Heating		dBA	-			71	73	-	71	73
Sound pressure level	Cooling	Nom.	dBA	46	53			54	53		54
	Heating	Nom.	dBA	47	57						
Operation range	Cooling	Ambient Min.~Max.	°CDB	-15~46							
	Heating	Ambient Min.~Max.	°CWB	-15~15.5							
Refrigerant	Type/GWP			R-32/675							
	Charge		kg/TCO2Eq	2.45/1.65	2.60/1.76			2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD	mm	9.52/15.9							
	Piping length	OU - IU Max.	m	50							
		System Equivalent	m	70							
		Chargeless	m	30							
	Additional refrigerant charge		kg/m	See installation manual							
	Level difference	IU - OU Max.	m	30.0							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240					3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A	20	25		32		16		

Contains fluorinated greenhouse gases

SkyAir Active-series
BLUEVOLUTION

Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- Ideal solution for small businesses and shops
- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- Low operation sound level down to 25dBA
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- Reduced energy consumption thanks to specially developed DC fan motor
- Optional fresh air intake
- Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles



- Standard built-in drain pump with 625mm lift increases flexibility and installation speed

More details and final information can be found by scanning or clicking the QR codes.

FBA-A(9) ARXM-R AZAS-MV AZAS-MY

Efficiency data				FBA + ARXM/AZAS	71A9 + ARXM71R	100A + AZAS100MV	125A + AZAS125MV	140A + AZAS140MV	100A + AZAS100MY	125A + AZAS125MY	140A + AZAS140MY
Cooling capacity	Nom./Max.			kW	6.80/6.98	9.50/-	12.1/-	13.4/-	9.50/-	12.1/-	13.4/-
Heating capacity	Nom./Max.			kW	7.50/7.66	10.8/-	13.5/-	15.5/-	10.8/-	13.5/-	15.5/-
Space cooling	Energy efficiency class				A		-		A	-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.0	9.50	12.1	13.0
	SEER				5.57	5.7	5.2	5.7	5.7	5.2	5.7
	ηs,c			%	-		205	225	-	205	225
	Annual energy consumption			kWh/a	427	633	1,497	1,418	633	1,497	1,418
Space heating (Average climate)	Energy efficiency class				A		-		A	-	
	Capacity		Pdesign	kW	4.50	6.00		7.80	6.00		7.80
	SCOP/A				3.81		3.55	3.85	3.81	3.55	3.85
	ηs,h			%	-		139	151	-	139	151
	Annual energy consumption			kWh/a	1,652	2,205	2,366	2,836	2,205	2,366	2,836

Indoor unit				FBA	71A9	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	245x1,000x800	245x1,400x800					
Weight	Unit			kg	35.0	46.0					
Air filter	Type				Resin net						
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	12.5/15.0/18.0	20.0/24.5/29.0	23.5/29.0/34.0		20.0/24.5/29.0	23.5/29.0/34.0	
		Heating	Low/Medium/High	m^3/min	12.5/15.0/18.0	20.0/24.5/29.0	23.5/29.0/34.0		20.0/24.5/29.0	23.5/29.0/34.0	
	External static pressure	Nom.		Pa	30	40	50		40	50	
Sound power level	Cooling			dBA	56.0	58.0	62.0		58.0	62.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	25.0/28.0/30.0	30.0/32.0/34.0	32.0/35.0/37.0		30.0/32.0/34.0	32.0/35.0/37.0	
	Heating	Low/Medium/High		dBA	25.0/28.0/31.0	30.0/33.0/36.0	32.0/35.0/38.0		30.0/33.0/36.0	32.0/35.0/38.0	
Control systems	Infrared remote control				BRC4C65 / BRC4C66						
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220						


Outdoor unit				ARXM/AZAS	ARXM71R	AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY
Dimensions	Unit	HeightxWidthxDepth		mm	734x954x401	990x940x320					
Weight	Unit			kg	49.0	72		79	72		79
Sound power level	Cooling			dBA	-	70	71	73	70	71	73
	Heating			dBA	-		71	73	-	71	73
Sound pressure level	Cooling	Nom.		dBA	52.0	53		54	53		54
	Heating	Nom.		dBA	52.0	57					
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46						
	Heating	Ambient	Min.~Max.	°CWB	-15~24	-15~15.5					
Refrigerant	Type/GWP				R-32/675						
	Charge			kg/TCO2Eq	1.15/0.780	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	-	30					
		System	Equivalent	m	-	50					
			Chargeless	m	30						
	Additional refrigerant charge			kg/m	0.035 (for piping length exceeding 10m)	See installation manual					
	Level difference	IU - OU	Max.	m	20.0	30.0					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	-	25	32		16		

Contains fluorinated greenhouse gases

Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- Combination with split outdoor units is ideal for small retail, offices and residential applications
- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- Low operation sound level down to 25dBA
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume

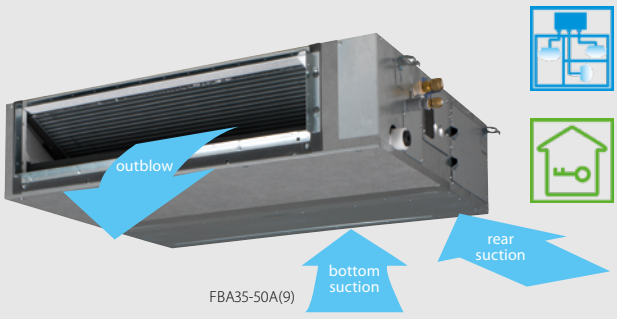


RXM-R




BRC1H52W BRP069C81

with multi zoning option

Optimised supply air volume

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%



Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster

More details and final information can be found by scanning or clicking the QR codes.

FBA-A(9)

RXM-R

RXM-R9

RXM-A

Efficiency data				FBA + RXM	35A9 + 35R9	50A9 + 50A	60A9 + 60R
Cooling capacity	Nom.			kW	3.40	5.00	5.70
Heating capacity	Nom.			kW	4.00	5.50	7.00
Space cooling	Energy efficiency class				A++		A+
	Capacity		Pdesign	kW	3.40	5.00	5.70
	SEER				6.23	6.27	5.91
	Annual energy consumption			kWh/a	191	279	336
Space heating (Average climate)	Energy efficiency class				A+		
	Capacity		Pdesign	kW	2.90	4.40	4.60
	SCOP/A				4.07	4.06	4.01
	Annual energy consumption			kWh/a	996	1,517	1,607

Indoor unit				FBA	35A9	50A9	60A9
Dimensions	Unit	HeightxWidthxDepth		mm	245x700x800		245x1,000x800
Weight	Unit			kg	28.0		35.0
Air filter	Type				Resin net		
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	10.5/12.5/15.0		12.5/15.0/18.0
		Heating	Low/Medium/High	m^3/min	10.5/12.5/15.0		12.5/15.0/18.0
	External static pressure	Nom.		Pa	30		
Sound power level	Cooling			dBA	60.0		56.0
Sound pressure level	Cooling	Low/Medium/High		dBA	29.0/32.0/35.0		25.0/28.0/30.0
	Heating	Low/Medium/High		dBA	29.0/34.0/37.0		25.0/28.0/31.0
Control systems	Infrared remote control				BRC4C65 / BRC4C66		
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220		


						NEW	
Outdoor unit				RXM	35R9	50A	60R
Dimensions	Unit	HeightxWidthxDepth		mm	552x840x350	734x954x401	
Weight	Unit			kg	32	49.0	
Sound pressure level	Cooling	Nom.		dBA	49.0	48.0	
	Heating	Nom.		dBA	49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46		
	Heating	Ambient	Min.~Max.	°CWB	-15~18		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg/TCO2Eq	0.76/0.52	1.15/0.780	
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	9.52	12.7	
	Piping length	OU - IU	Max.	m	20	30	
		System	Chargeless	m	10		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	m	15	20.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	13	16	

Contains fluorinated greenhouse gases

Concealed ceiling unit with high ESP

ESP up to 200 Pa, ideal for large sized spaces

- High external static pressure up to 200Pa facilitates extensive duct and grille network
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- Built-in drain pump (625mm) increases the flexibility and installation speed (standard for FDA125, optional for FDA200-250)
- Standard supplied suction filter simplifies installation

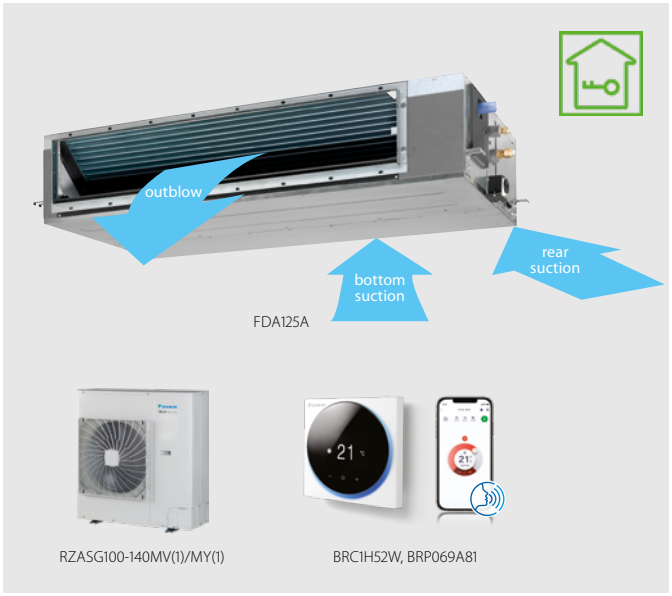

FDA-A RZAG-NV1 RZAG-NY1

RZASG-MV1 RZASG-MY1 RZASG-MV RZASG-MY

More details and final information can be found by scanning or clicking the QR codes.

					Sky Air Alpha-series		Sky Air Advance-series	
Efficiency data					**FDA125A+RZAG125NV1**	**FDA125A+RZAG125NY1**	**FDA125A+RZASG125MV(1)**	**FDA125A+RZASG125MY(1)**
Cooling capacity	Nom.			kW	12.1			
Heating capacity	Nom.			kW	13.5			
Space cooling	Capacity		Pdesign	kW	12.1			
	SEER				6.59		5.03	
	ηs,c			%	261		198	
	Annual energy consumption			kWh/a	1,102		1,444	
Space heating (Average climate)	Capacity		Pdesign	kW	9.52		6.00	
	SCOP/A				4.35		3.58	
	ηs,h			%	171		140	
	Annual energy consumption			kWh/a	3,064		2,346	

Indoor unit					**FDA**	**125A**	**125A**	**125A**	**125A**
Dimensions	Unit	HeightxWidthxDepth		mm	300x1,400x700				
Weight	Unit			kg	45				
Required ceiling void >				mm	350				
Air filter	Type				Resin net				
Decoration panel	Model				BYBS125DJW1				
	Colour				White (10Y9/0.5)				
	Dimensions	HeightxWidthxDepth		mm	55x1,500x500				
	Weight			kg	6.5				
Fan	Air flow rate	Cooling	Low/High	m^3/min	28.0/39.0				
		Heating	Low/High	m^3/min	28.0/39.0				
	External static pressure	Nom./High		Pa	50/200				
Sound power level	Cooling			dBA	66				
Sound pressure level	Cooling	Low/High		dBA	33/40				
	Heating	Low/High		dBA	33/40				
Control systems	Infrared remote control				BRC4C65/BRC4C66				
	Wired remote control				BRC1H52W/S/K/BRC1E53A/BRC1E53B/BRC1E53C/BRC1D52				
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220				
Piping connections	Drain				VP25 (I.D. 25/O.D. 32)				

Outdoor unit					**RZAG125NV1**	**RZAG125NY1**	**RZASG125MV(1)**	**RZASG125MY(1)**
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460		990x940x320	
Weight	Unit			kg	95	94	70 (MV1/MY1) / 72 (MV/MY)	
Sound power level	Cooling			dBA	69		71	
	Heating			dBA	68		-	
Sound pressure level	Cooling	Nom.		dBA	49		54	
	Heating	Nom.		dBA	52		58	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52		-15~46	
	Heating	Ambient	Min.~Max.	°CWB	-20~18		-15~15.5	
Refrigerant	Type/GWP				R-32/675		R-32/675	
	Charge			kg/TCO2Eq	3.70/2.50		2.60/1.76	
Piping connections	Liquid/Gas	OD		mm	9.52/15.9		9.52/15.9	
	Piping length	OU - IU	Max.	m	85		50	
		System	Equivalent	m	100		70	
			Chargeless	m	40		30	
	Level difference	IU - OU	Max.	m	30		30.0	
	Additional refrigerant charge			kg/m	See installation manual		See installation manual	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240	3~/50/380-415	1~/50/220-240	3~/50/380-415
Current - 50Hz	Maximum fuse amps (MFA)			A	32	16	32	16


Contains fluorinated greenhouse gases

SkyAir Advance-series
BLUEVOLUTION

Concealed ceiling unit with high ESP

ESP up to 250 Pa, ideal for large sized spaces

- High external static pressure up to 250Pa facilitates extensive duct and grille network
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- Optional drain pump
- Standard supplied suction filter simplifies installation
- Up to 26.4kW in heating mode

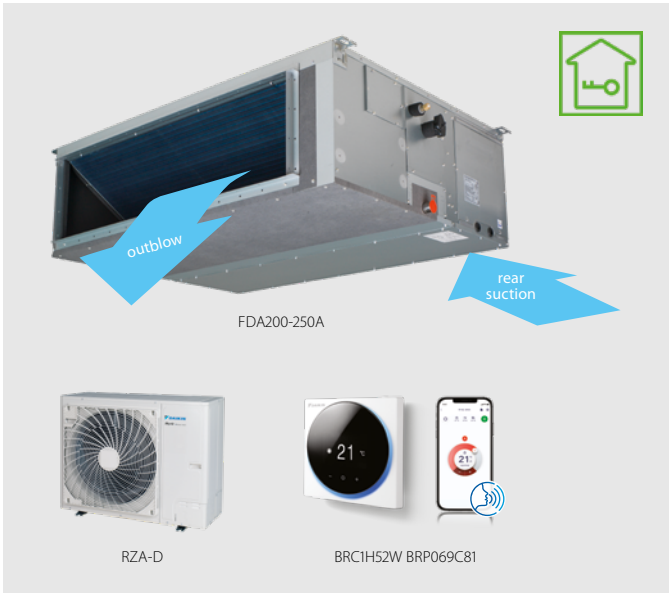

FDA200-250A

RZA-D

BRC1H52W BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FDA-A

RZA-D

Efficiency data				FDA + RZA	200A + 200D	250A + 250D
Cooling capacity	Min./Nom./Max.			kW	-/19.0/-	-/22.0/-
Heating capacity	Min./Nom./Max.			kW	-/22.4/-	-/24.0/-
Space cooling	Capacity		Pdesign	kW	19.0	22.0
	SEER				6.26	5.38
	ηs,c			%	247	212
	Annual energy consumption			kWh/a	1,821	2,455
Space heating (Average climate)	Capacity		Pdesign	kW	11.2	12.1
	SCOP/A				3.59	3.55
	ηs,h			%	141	139
	Annual energy consumption			kWh/a	4,368	4,765

Indoor unit				FDA	200A	250A
Dimensions	Unit	HeightxWidthxDepth		mm	470x1,490x1,100	
Weight	Unit			kg	104	115
Air filter	Type				Resinnet	
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	36.0/50/64.0	43.0/56/69.0
		Heating	Low/Medium/High	m^3/min	36.0/50.0/64.0	43.0/56.0/69.0
	External static pressure	Nom./High		Pa	62/250	
Sound power level	Cooling			dBA	69.0	71.0
Sound pressure level	Cooling	Low / Medium / High		dBA	36.0/39.0/43.0	37.0/40.0/44.0
	Heating	Low / Medium / High		dBA	36.0/39.0/43.0	37.0/40.0/44.0
Control systems	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52	
Piping connections	Drain				BSP1	

Outdoor unit				RZA	200D	250D
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460	
Weight	Unit			kg	117	
Sound power level	Cooling			dBA	73	76
	Heating			dBA	76	79
Sound pressure level	Cooling	Nom.		dBA	53	57
	Heating	Nom.		dBA	60	63
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~46	
	Heating	Ambient	Min.~Max.	°CWB	-20~15	
Refrigerant	Type/GWP				R-32/675	
	Charge			kg/TCO2Eq	5/3.38	
Piping connections	Liquid/Gas OD			mm	9.52/22.2	
	Piping length	OU - IU	Max.	m	100	
		System	Chargeless	m	30	
	Additional refrigerant charge			kg/m	See installation manual	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /380-415	
Current - 50Hz	Maximum fuse amps (MFA)			A	20	

Contains fluorinated greenhouse gases

SkyAir Active-series
BLUEVOLUTION

Concealed ceiling unit

Ideal for residential applications with false ceilings

- Combination with split outdoor units is ideal for small retail, offices or residential applications
- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- Low operation sound level down to 25dBA
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the ceiling: only the suction and discharge grilles are visible
- Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit




Optimised supply air volume

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance → the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster



More details and final information can be found by scanning or clicking the QR codes.

ADEA-A ARXM-R AZAS-MV

Efficiency data				ADEA + ARXM / AZAS	71A + ARXM71R	100A + AZAS100MV	125A + AZAS125MV
Cooling capacity	Nom.			kW	6.80/6.98	9.50	12.10
Heating capacity	Nom.			kW	7.50/7.66	10.80	13.50
Space cooling	Energy efficiency class				A	A	-
	Capacity		Pdesign	kW	6.80	9.50	12.10
	SEER				5.35	5.13	4.73
	ηs,c			%	445	-	186
	Annual energy consumption			kWh/a	A	648	1,534
Space heating (Average climate)	Energy efficiency class				6.00	A	-
	Capacity		Pdesign	kW	3.80	6.00	
	SCOP/A				2,209	3.81	3.50
	ηs,h			%		-	137
	Annual energy consumption			kWh/a		2,206	2,399

Indoor unit				ADEA	71A	100A	125A
Dimensions	Unit	HeightxWidthxDepth		mm	245x1,000x800	245x1,400x800	
Weight	Unit			kg	35.0	46.0	
Air filter	Type				Resin net		
Fan	Air flow rate	Cooling	Low/Medium/High	m³/min	12.5/15.0/18.0	23.0/26.0/29.0	23.5/29.0/34.0
		Heating	Low/Medium/High	m³/min	12.5/15.0/18.0	23.0/26.0/29.0	23.5/29.0/34.0
	External static pressure	Nom./High		Pa	30/150	40/150	50/150
Sound power level	Cooling			dBA	56	58	62
Sound pressure level	Cooling	Low/Medium/High		dBA	25/28/30	30/32/34	32/35/37
	Heating	Low/Medium/High		dBA	25/28/31	30/33/36	32/35/38
Control systems	Infrared remote control				BRC4C65 / BRC4C66		
	Wired remote control				BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240/220		

Outdoor unit				ARXM / AZAS	ARXM71R	AZAS100MV	AZAS125MV
Dimensions	Unit	HeightxWidthxDepth		mm	734x954x401	990x940x320	
Weight	Unit			kg	49.0	72	
Sound power level	Cooling			dBA	-	70	71
	Heating			dBA	-	-	71
Sound pressure level	Cooling	Nom.		dBA	52.0	53	
	Heating	Nom.		dBA	52.0	57	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10 ~46		
	Heating	Ambient	Min.~Max.	°CWB	-15~24	-15 ~15.5	
Refrigerant	Type/GWP				R-32/675		
	Charge			kg/TCO2Eq	1.15/0.780	2.60/1.76	
Piping connections	Liquid/Gas OD			mm	9.52/15.9		
	Piping length	OU - IU	Max.	m	30		
		System	Equivalent	m	-	50	
			Chargeless	m	-	30	
	Additional refrigerant charge			kg/m	0.035 (for piping length exceeding 10m)	See installation manual	
	Level difference	IU - OU	Max.	m	20.0	30.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	-	25	32

Contains fluorinated greenhouse gases

Sky Air Alpha-series BLUEVOLUTION

Wall mounted unit

For rooms with no false ceilings nor free floor space

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Can easily be installed in both new and refurbishment projects
- The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- Maintenance operations can be performed easily from the front of the unit
- Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



FAA71B

RZAG-NV1_NY1

BRC1H52W, BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FAA-B RZAG-NV1 RZAG-NY1

Efficiency data				**FAA + RZAG**	**71B + 71NV1**	**100B + 100NV1**	**71B + 71NY1**	**100B + 100NY1**
Cooling capacity	Nom.			kW	6.80	9.50	6.80	9.50
Heating capacity	Nom.			kW	7.50	10.80	7.50	10.80
Space cooling	Energy efficiency class				A++			
	Capacity	Pdesign		kW	6.80	9.50	6.80	9.50
	SEER				6.58	6.42	6.58	6.42
	Annual energy consumption			kWh/a	362	518	362	518
Space heating (Average climate)	Energy efficiency class				A+			
	Capacity	Pdesign		kW	4.70	7.80	4.70	7.80
	SCOP/A				4.20	4.01	4.20	4.01
	Annual energy consumption			kWh/a	1,567	2,725	1,567	2,725

Indoor unit				**FAA**	**71B**	**100B**	**71B**	**100B**
Dimensions	Unit	HeightxWidthxDepth		mm	290x1,050x269	340x1,200x262	290x1,050x269	340x1,200x262
Weight	Unit			kg	14.0	18	14.0	18
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	12.1/13.4/16.2	18.7/21.1/23.0	12.1/13.4/16.2	18.7/21.1/23.0
		Heating	Low/Medium/High	m^3/min	12.7/14.2/16.9	18.7/20.9/23.0	12.7/14.2/16.9	18.7/20.9/23.0
Sound power level	Cooling			dBA	61.0	65.0	61.0	65.0
	Heating			dBA	61.0	65.0	61.0	65.0
Sound pressure level	Cooling	Low/Medium/High		dBA	40.0/42.0/45.0	41.0/45.0/49.0	40.0/42.0/45.0	41.0/45.0/49.0
	Heating	Low/Medium/High		dBA	40.0/42.0/45.0	41.0/45.0/49.0	40.0/42.0/45.0	41.0/45.0/49.0
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240			

Outdoor unit				**RZAG**	**71NV1**	**100NV1**	**71NY1**	**100NY1**
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460			
Weight	Unit			kg	81	85	81	85
Sound power level	Cooling			dBA	64	66	64	66
Sound pressure level	Cooling	Nom.		dBA	46	47	46	47
	Heating	Nom.		dBA	48	50	48	50
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20 ~52			
	Heating	Ambient	Min.~Max.	°CWB	-20 ~18			
Refrigerant	Type/GWP				R-32/675			
	Charge			kg/TCO2Eq	3.20/2.16			
Piping connections	Liquid/Gas	OD		mm	9.52/15.9			
	Piping length	OU - IU	Max.	m	55	85	55	85
		System	Equivalent	m	75	100	75	100
			Chargeless	m	40			
	Additional refrigerant charge			kg/m	See installation manual			
	Level difference	IU - OU	Max.	m	30			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		3~/50/380-415	
Current - 50Hz	Maximum fuse amps (MFA)			A	20	32	16	

Contains fluorinated greenhouse gases

Sky Air Advance-series
BLUEVOLUTION

Wall mounted unit

For rooms with no false ceilings nor free floor space

- Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Can easily be installed in both new and refurbishment projects
- The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- Maintenance operations can be performed easily from the front of the unit
- Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



FAA71B



RZASG100-140MV(1)/MY(1)



BRC1H52W, BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FAA-B RZASG-MV1 RZASG-MY1 RZASG-MV RZASG-MY

Efficiency data				FAA + RZASG	71B + 71MV1	100B + 100MV(1)	100B + 100MY(1)
Cooling capacity	Nom.			kW	6.80	9.50	
Heating capacity	Nom.			kW	7.50	10.8	
Space cooling	Energy efficiency class				A++	A+	
	Capacity		Pdesign	kW	6.80	9.50	
	SEER				6.41	5.83	
	ηs,c			%	-		
	Annual energy consumption			kWh/a	371	570	
Space heating (Average climate)	Energy efficiency class				A		
	Capacity		Pdesign	kW	4.50	6.00	
	SCOP/A				3.90	3.85	
	ηs,h			%	-		
	Annual energy consumption			kWh/a	1,615	2,182	

Indoor unit				FAA	71B	100B	100B
Dimensions	Unit	HeightxWidthxDepth		mm	290x1,050x269	340x1,200x262	
Weight	Unit			kg	14.0	18	
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	12.1/13.4/16.2	18.7/21.1/23.0	
		Heating	Low/Medium/High	m^3/min	12.7/14.2/16.9	18.7/20.9/23.0	
Sound power level	Cooling			dBA	61.0	65.0	
	Heating			dBA	61.0	65.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	40.0/42.0/45.0	41.0/45.0/49.0	
	Heating	Low/Medium/High		dBA	40.0/42.0/45.0	41.0/45.0/49.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		

Outdoor unit				RZASG	71MV1	100MV(1)	100MY(1)
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320	990x940x320	
Weight	Unit			kg	60	70 (MV1/MY1) / 72 (MV/MY)	
Sound power level	Cooling			dBA	65	70	
Sound pressure level	Cooling	Nom.		dBA	46	53	
	Heating	Nom.		dBA	47	57	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~46		
	Heating	Ambient	Min.~Max.	°CWB	-15~15.5		
Refrigerant	Type/GWP				R-32/675		
	Charge			kg/TCO2Eq	2.45/1.65	2.60/1.76	
Piping connections	Liquid/ Gas	OD		mm	9.52/15.9		
	Piping length	OU - IU	Max.	m	50		
		System	Equivalent	m	70		
			Chargeless	m	30		
	Additional refrigerant charge			kg/m	See installation manual		
	Level difference	IU - OU	Max.	m	30.0		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		3~/50 /380-415
Current - 50Hz	Maximum fuse amps (MFA)			A	20	25	16

Contains fluorinated greenhouse gases

SkyAir Active-series BLUEVOLUTION

Wall mounted unit

For rooms with no false ceilings nor free floor space

- Ideal solution for small businesses and shops
- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Can easily be installed in both new and refurbishment projects
- The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- Maintenance operations can be performed easily from the front of the unit
- Flexible to install as the largest casing only weighs 17kg and piping connection can be done at the bottom, left or right of the unit



FAA71B

AZAS100-140MV1_MY1

BRC1H52W, BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FAA-B ARXM-R AZAS-MV AZAS-MY

Efficiency data					FAA + ARXM/AZAS	71B + ARXM71R	100B + AZAS100MV	100B + AZAS100MY
Cooling capacity	Nom./Max.			kW		6.80/6.95	9.50 /-	
Heating capacity	Nom./Max.			kW		7.50/7.59	10.8 /-	
Space cooling	Energy efficiency class					A+	A	
	Capacity		Pdesign	kW		6.80	9.50	
	SEER					5.77	5.25	
	Annual energy consumption			kWh/a		412	633	
Space heating (Average climate)	Energy efficiency class					A		
	Capacity		Pdesign	kW		4.50	6.00	
	SCOP/A					3.81	3.81	
	Annual energy consumption			kWh/a		1,652	2,205	

Indoor unit					FAA	71B	100B	100B
Dimensions	Unit	HeightxWidthxDepth		mm		290x1,050x269	340x1,200x262	
Weight	Unit			kg		14.0	18	
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min		12.1/13.4/16.2	18.7/21.1/23.0	
		Heating	Low/Medium/High	m^3/min		12.7/14.2/16.9	18.7/20.9/23.0	
Sound power level	Cooling			dBA		61.0	65.0	
	Heating			dBA		61.0	65.0	
Sound pressure level	Cooling	Low/Medium/High		dBA		40.0/42.0/45.0	41.0/45.0/49.0	
	Heating	Low/Medium/High		dBA		40.0/42.0/45.0	41.0/45.0/49.0	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240	1~/50 /220-240	

Outdoor unit					ARXM/AZAS	ARXM71R	AZAS100MV	AZAS100MY
Dimensions	Unit	HeightxWidthxDepth		mm		734x954x401	990x940x320	
Weight	Unit			kg		49.0	72	
Sound power level	Cooling			dBA		-	70	
Sound pressure level	Cooling	Nom.		dBA		52.0	53	
	Heating	Nom.		dBA		52.0	57	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-10~46	
	Heating	Ambient	Min.~Max.	°CWB		-15~24	-15~15.5	
Refrigerant	Type/GWP					R-32/675		
	Charge			kg/TCO2Eq		1.15/0.780	2.60/1.76	
Piping connections	Liquid/ Gas	OD		mm		9.52/15.9		
	Piping length	OU - IU	Max.	m		30		
		System	Equivalent	m		-	50	
			Chargeless	m		-	30	
	Additional refrigerant charge			kg/m		0.035 (for piping length exceeding 10m)	See installation manual	
	Level difference	IU - OU	Max.	m		20.0	30.0	
Power supply	Phase/Frequency/Voltage			Hz/V		1~/50 /220-240		3~/50 /380-415
Current - 50Hz	Maximum fuse amps (MFA)			A		-	25	16

Contains fluorinated greenhouse gases

perfera

Sky Air Alpha-series BLUEVOLUTION

Wall mounted unit

Attractive, wall mounted design with perfect indoor air quality

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Seasonal efficiency values up to A+++ in cooling and heating
- Practically inaudible: the unit runs so quietly, you will almost forget it is there
- Cleaner air thanks to Daikin's Flash Streamer technology: you can breathe deep with no worries about impure air
- 2-area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting. (larger capacity area)
- Onecta app: control your indoor from any location with an app, via your local network or internet
- Sleek, unobtrusive air conditioning unit that matches European sensibilities regarding interior design
- 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces



FTXM-R



RZAG35-60A



ARC466A33

More details and final information can be found by scanning or clicking the QR codes.

FTXM-R

RZAG-A

Efficiency data				FTXM + RZAG	35R + 35A	50R + 50A	60R + 60A
Cooling capacity	Min./Nom./Max.			kW	1.6/3.5/5.0	1.7/5.0/6.0	1.7/6.0/6.8
Heating capacity	Min./Nom./Max.			kW	1.40/4.00/5.30	1.50/6.00/6.50	1.60/7.00/7.50
Space cooling	Energy efficiency class				A++		
	Capacity		Pdesign	kW	3.50	5.00	6.00
	SEER				7.70	7.41	6.90
	Annual energy consumption			kWh/a	159	236	304
Space heating (Average climate)	Energy efficiency class				A++		A+
	Capacity		Pdesign	kW	2.60	4.50	4.60
	SCOP/A				4.60		4.35
	Annual energy consumption			kWh/a	790	1,369	1,480

Indoor unit				FTXM	35R	50R	60R
Dimensions	Unit	HeightxWidthxDepth		mm	295x778x272	299x998x292	
Weight	Unit			kg	10.0	14.5	
Air filter	Type				Removable/washable		
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m^3/min	4.2/6.0/7.8/11.3	8.3/11.4/14/15.8	9.1/11.8/14/16.7
		Heating	Silent operation/ Low/Medium/High	m^3/min	4.9/6.5/8.5/9.8	10.5/12.0/14.2/15.8	11.1/12.4/15.2/16.5
Sound power level	Cooling			dBA	58	58.0	60.0
	Heating			dBA	54	58.0	59.0
Sound pressure level	Cooling	Silent operation/Low/High		dBA	19/29/45	27.0/36.0/44.0	30.0/37.0/46.0
	Heating	Silent operation/Low/High		dBA	20/28/39	31.0/34.0/43.0	33.0/36.0/45.0
Control systems	Infrared remote control				ARC466A67		
	Wired remote control				BRC073A1		

Outdoor unit				RZAG	35A	50A	60A
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373		
Weight	Unit			kg	52		
Sound power level	Cooling			dBA	62.0	63.0	64.0
	Heating			dBA	62.0	63.0	64.0
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0
	Heating	Nom.		dBA	48.0	49.0	50.0
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52		
	Heating	Ambient	Min.~Max.	°CWB	-20~24		
Refrigerant	Type/GWP				R-32/675.0		
	Charge			kg/TCO2Eq	1.55/1.05		
Piping connections		OD		mm	6.35/9.52	6.35/12.7	
	Piping length	OU - IU	Max.	m	50		
		System	Chargeless	m	30		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)		
	Level difference	IU - OU	Max.	m	30.0		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		


Contains fluorinated greenhouse gases

SkyAir Alpha-series BLUEVOLUTION


Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

› Combining with Sky Air Advance-series ensures good value for money for all types of commercial applications
› Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle



› Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
› Can easily be installed in both new and refurbishment projects
› Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space



› Reduced energy consumption thanks to specially developed DC fan motor
› 5 different fan speeds available for maximum comfort



FHA60-71A9

RZAG35-60A

BRC1H52W, BRP069A81

More details and final information can be found by scanning or clicking the QR codes.

FHA-A(9)

RZAG-A

RZAG-NV1

RZAG-NY1

Efficiency data				FHA + RZAG	35A9+35A	50A9+50A	60A9+60A	71A9+71NV1	100A+100NV1	125A+125NV1	140A+140NV1	71A9+71NY1	100A+100NY1	125A+125NY1	140A+140NY1
Cooling capacity	Min./Nom./Max.			kW	1.70/3.50/4.50	1.70/5.00/6.00	1.90/6.00/6.80	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-	-/6.80/-	-/9.50/-	-/12.1/-	-/13.4/-
Heating capacity	Min./Nom./Max.			kW	1.40/4.00/5.50	1.70/5.80/6.50	1.70/7.00/7.50	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.50/-	-/10.8/-	-/13.5/-	-/15.5/-
Space cooling	Energy efficiency class				A++					-		A++		-	
	Capacity		Pdesign	kW	3.50	5.00	6.00	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
	SEER				6.40	6.80	6.60	7.11	6.42	7.14	6.42	7.11	6.42	7.14	6.42
	ηs,c			%	-					283	254	-		283	254
	Annual energy consumption			kWh/a	191	257	318	335	518	1,017	1,253	335	518	1,017	1,253
Space heating (Average climate)	Energy efficiency class				A+				A++	-		A+	A++	-	
	Capacity		Pdesign	kW	3.10	4.00	4.60	4.70	7.80	9.52		4.70	7.80	9.52	
	SCOP/A				4.10	4.30	4.20	4.32	4.61	4.20	4.30	4.32	4.61	4.20	4.30
	ηs,h			%	-					165	169	-		165	169
	Annual energy consumption			kWh/a	1,058	1,302	1,633	1,523	2,369	3,174	3,100	1,523	2,369	3,174	3,100

Indoor unit				FHA	35A9	50A9	60A9	71A9	100A	125A	140A	71A9	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	235x960x690		235x1,270x690		235x1,590x690			235x1,270x690	235x1,590x690		
Weight	Unit			kg	26	27	32	34	41			34	41		
Air filter	Type				Resinnet										
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
		Heating	Low/Medium/High	m^3/min	10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
Sound power level	Cooling			dBA	53.0	54.0		55.0	60.0	62.0	64.0	55.0	60.0	62.0	64.0
	Heating			dBA	53.0	54.0		55.0	60.0	62.0	64.0	55.0	60.0	62.0	64.0
Sound pressure level	Cooling	Low/High		dBA	31.0/36.0	32.0/37.0	33.0/37.0	34.0/38.0	34.0/42.0	37.0/44.0	38.0/46.0	34.0/38.0	34.0/42.0	37.0/44.0	38.0/46.0
	Heating	Nom./High		dBA	34.0/36.0	35.0/37.0		36.0/38.0	38.0/42.0	41.0/44.0	42.0/46.0	36.0/38.0	38.0/42.0	41.0/44.0	42.0/46.0
Control systems	Infrared remote control				BRC7GA53-9 / BRC7GA56										
	Wired remote control				BRC1D528 / BRC1H51(9)W/S/K7 / BRC1H52W/S/K / BRC1H81W7 / BRC1H81S7 / BRC1E53A/B/C7 / BRC1H82W/S/K										
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220										
Piping connections	Drain				VP20										

Outdoor unit				RZAG	35A	50A	60A	71NV1	100NV1	125NV1	140NV1	71NY1	100NY1	125NY1	140NY1
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373			870x1,100x460							
Weight	Unit			kg	52			81	85	95		81	85	94	
Sound power level	Cooling			dBA	62.0	63.0	64.0	64	66	69	70	64	66	69	70
	Heating			dBA	62.0	63.0	64.0	-		68	71	-		68	71
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0	46	47	49	50	46	47	49	50
	Heating	Nom.		dBA	48.0	49.0	50.0	48	50	52		48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20 ~ 52			-20 ~52							
	Heating	Ambient	Min.~Max.	°CWB	-20 ~ 24			-20 ~18							
Refrigerant	Type/GWP				R-32/675.0			R-32/675							
	Charge			kg/TCO2Eq	1.55/1.05			3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas	OD		mm	6.35/9.50	6.35/12.7		10/15.9							
	Piping length	OU - IU	Max.	m	50			55		85		55		85	
		System	Equivalent	m	-			75		100		75		100	
			Chargeless	m	30			40							
	Level difference	IU - OU	Max.	m	30.0			30							
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)			See installation manual							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240							3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	-			20		32		16			

Contains fluorinated greenhouse gases

SkyAir Advance-series
BLUEVOLUTION

Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle
- Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- 5 different fan speeds available for maximum comfort
- Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



FHA60-71A9



RZASG100-140MV(1)/MY(1)



BRC1H52W, BRP069A81

More details and final information can be found by scanning or clicking the QR codes. FHA-A(9) RZASG-MV1 RZASG-MY1 RZASG-MV RZASG-MY

Efficiency data				FHA + RZASG	71A9 + 71MV1	100A + 100MV(1)	125A + 125MV(1)	140A + 140MV(1)	100A + 100MY(1)	125A + 125MY(1)	140A + 140MY(1)
Cooling capacity	Nom.			kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Nom.			kW	7.50	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class				A+		-		A+	-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER				5.95	5.83		5.88	5.83		5.88
	ηs,c			%	-		230	232	-	230	232
	Annual energy consumption			kWh/a	400	570	1,246	1,368	570	1,246	1,368
Space heating (Average climate)	Energy efficiency class				A		-		A	-	
	Capacity		Pdesign	kW	4.50	6.00		7.80	6.00		7.80
	SCOP/A				3.90	3.91	3.83	3.81	3.91	3.83	3.81
	ηs,h			%	-		150	149	-	150	149
	Annual energy consumption			kWh/a	1,616	2,148	2,193	2,866	2,148	2,193	2,866

Indoor unit				FHA	71A9	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	235x1,270x690	235x1,590x690					
Weight	Unit			kg	34	41					
Air filter	Type				Resin net						
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
		Heating	Low/Medium/High	m^3/min	14.0/17.0/20.5	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
Sound power level	Cooling			dBA	55.0	60.0	62.0	64.0	60.0	62.0	64.0
	Heating			dBA	55.0	60.0	62.0	64.0	60.0	62.0	64.0
Sound pressure level	Cooling	Low/High		dBA	34.0/38.0	34.0/42.0	37.0/44.0	38.0/46.0	34.0/42.0	37.0/44.0	38.0/46.0
	Heating	Nom./High		dBA	36.0/38.0	38.0/42.0	41.0/44.0	42.0/46.0	38.0/42.0	41.0/44.0	42.0/46.0
Control systems	Infrared remote control				BRC7GA53-9 / BRC7GA56						
	Wired remote control				BRC1H52W/S/K; BRC1E53A; BRC1E53B; BRC1E53C; BRC1D52						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220						
Piping connections	Drain				VP20						

Outdoor unit				RZASG	71MV1	100MV(1)	125MV(1)	140MV(1)	100MY(1)	125MY(1)	140MY(1)
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320	990x940x320					
Weight	Unit			kg	60	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)
Sound power level	Cooling			dBA	65	70	71	73	70	71	73
	Heating			dBA	-		71	73	-	71	73
Sound pressure level	Cooling	Nom.		dBA	46	53		54	53		54
	Heating	Nom.		dBA	47	57					
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~46						
	Heating	Ambient	Min.~Max.	°CWB	-15~15.5						
Refrigerant	Type/GWP				R-32/675						
	Charge			kg/TCO2Eq	2.45/1.65	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/ Gas	OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	50						
		System	Equivalent	m	70						
			Chargeless	m	30						
	Level difference	IU - OU	Max.	m	30.0						
	Additional refrigerant charge			kg/m	See installation manual						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	20	25	32		16		

Contains fluorinated greenhouse gases

Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- Ideal solution for small businesses and shops
- Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle
- Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- 5 different fan speeds available for maximum comfort
- Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



FHA60-71A9

AZAS-MV/MY

BRC1H52W, BRP069A81

More details and final information can be found by scanning or clicking the QR codes.

FHA-A(9) AZAS-MV AZAS-MY

Efficiency data				FHA + AZAS	100A + 100MV	125A + 125MV	140A + 140MV	100A + 100MY	125A + 125MY	140A + 140MY
Cooling capacity	Nom.			kW	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Nom.			kW	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class				A	-		A	-	
	Capacity		Pdesign	kW	9.50	12.1	13.4	9.50	12.1	13.4
	SEER				5.6					
	ηs,c			%	-	221		-	221	
	Annual energy consumption			kWh/a	594	1,297	1,436	594	1,297	1,436
Space heating (Average climate)	Energy efficiency class				A	-		A	-	
	Capacity		Pdesign	kW	6.00		7.80	6.00		7.80
	SCOP/A				3.87	3.75	3.81	3.87	3.75	3.81
	ηs,h			%	-	147	149	-	147	149
	Annual energy consumption			kWh/a	2,171	2,240	2,866	2,171	2,240	2,866

Indoor unit				FHA	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	235x1,590x690					
Weight	Unit			kg	41					
Air filter	Type				Resin net					
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
		Heating	Low/Medium/High	m^3/min	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0	20.0/24.0/28.0	23.0/27.0/31.0	24.0/29.0/34.0
Sound power level	Cooling			dBA	60.0	62.0	64.0	60.0	62.0	64.0
	Heating			dBA	60.0	62.0	64.0	60.0	62.0	64.0
Sound pressure level	Cooling	Low/High		dBA	34.0/42.0	37.0/44.0	38.0/46.0	34.0/42.0	37.0/44.0	38.0/46.0
	Heating	Nom./High		dBA	38.0/42.0	41.0/44.0	42.0/46.0	38.0/42.0	41.0/44.0	42.0/46.0
Control systems	Infrared remote control				BRC7GA53-9 / BRC7GA56					
	Wired remote control				RC1H52W/S/K; BRC1E53A; BRC1E53B; BRC1E53C; BRC1D52					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220					
Piping connections	Drain				VP20					

Outdoor Unit					AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY
Dimensions	Unit	HeightxWidthxDepth		mm	990x940x320					
Weight	Unit			kg	72		79	72		79
Sound power level	Cooling			dBA	70	71	72	70	71	72
	Heating			dBA	70	71	72	70	71	72
Sound pressure level	Cooling	Nom.		dBA	53	54	55	53	54	55
	Heating	Nom.		dBA	57	58	59	57	58	59
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46					
	Heating	Ambient	Min.~Max.	°CWB	-15~15.5					
Refrigerant	Type/GWP				R-32/675					
	Charge			kg/TCO2Eq	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD		mm	9.52/15.9					
	Piping length	OU - IU	Max.	m	30					
		System	Equivalent	m	50					
			Chargeless	m	30					
	Additional refrigerant charge			kg/m	See installation manual					
	Level difference	IU - OU	Max.	m	30.0					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240			3~/50/380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	25	32		16		

Contains fluorinated greenhouse gases

Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- Combination with split outdoor units is ideal for small retail, offices and residential applications
- Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle
- Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- 5 different fan speeds available for maximum comfort
- Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



FHA100-140A9



RXM-R9



BRC1H52W BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FHA-A(9) RXM-R RXM-R9 RXM-A

Efficiency data				FHA + RXM	35A9 + 35R9	50A9 + 50A	60A9 + 60R
Cooling capacity	Nom.			kW	3.40	5.00	5.70
Heating capacity	Nom.			kW	4.00	6.00	7.20
Space cooling	Energy efficiency class				A++	A+	
	Capacity	Pdesign		kW	3.40	5.00	5.70
	SEER				6.24	5.92	6.08
	Annual energy consumption			kWh/a	191	295	328
Space heating (Average climate)	Energy efficiency class				A+	A	
	Capacity	Pdesign		kW	3.10	4.35	4.71
	SCOP/A				4.43	3.86	3.87
	Annual energy consumption			kWh/a	979	1,577	1,704

Indoor unit				FHA	35A9	50A9	60A9
Dimensions	Unit	HeightxWidthxDepth		mm	235x960x690	235x960x690	235x1,270x690
Weight	Unit			kg	26	27	32
Air filter	Type				Resin net	Resin net	
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5
		Heating	Low/Medium/High	m^3/min	10.0/11.5/14.0	10.0/12.0/15.0	11.5/15.0/19.5
Sound power level	Cooling			dBA	53.0	54.0	
	Heating			dBA	53.0	54.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	31.0/34.0/36.0	32.0/35.0/37.0	33.0/35.0/37.0
	Heating	Medium/Nom./High		dBA	31.0/34.0/36.0	32.0/35.0/37.0	33.0/35.0/37.0
Control systems	Infrared remote control				BRC7GA53-9 / BRC7GA56		
	Wired remote control				BRC1H52W/S/K / BRC1E53A/B/C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220		

						NEW	
Outdoor unit				**RXM**	**35R9**	**50A**	**60R**
Dimensions	Unit	HeightxWidthxDepth		mm	552x840x350	734x954x401	
Weight	Unit			kg	32	49.0	
Sound pressure level	Cooling	Nom.		dBA	49.0	48.0	
	Heating	Nom.		dBA	49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10 ~ 46		
	Heating	Ambient	Min.~Max.	°CWB	-15 ~ 18		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge			kg/TCO2Eq	0.76/0.52	1.15/0.780	
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	9.52	12.7	
	Piping length	OU - IU	Max.	m	20	30	
		System	Chargeless	m	10		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	m	15	20.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	13	16	

Contains fluorinated greenhouse gases

Sky Air Alpha-series BLUEVOLUTION


4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space

- Combining with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Unified indoor unit range for R-32 and R-410A
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- 5 different discharge angles between 0 and 60° can be programmed via the remote control




More details and final information can be found by scanning or clicking the QR codes.

FUA-A RZAG-NV1 RZAG-NY1



- Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7011) blends easily with any interior
- Optimum comfort guaranteed with automatic air flow adjustment to the required load
- Standard drain pump with 720mm lift increases flexibility and installation speed



Efficiency data					FUA + RZAG	71A + 71NV1	100A + 100NV1	125A + 125NV1	71A + 71NY1	100A + 100NY1	125A + 125NY1
Cooling capacity	Nom.				kW	6.80	9.50	12.1	6.80	9.50	12.1
Heating capacity	Nom.				kW	7.50	10.8	13.5	7.50	10.8	13.5
Space cooling	Energy efficiency class					A++		-	A++		-
	Capacity		Pdesign		kW	6.80	9.50	12.1	6.80	9.50	12.1
	SEER					7.02	6.42	6.39	7.02	6.42	6.39
	ηs,c				%	-		253	-		253
	Annual energy consumption				kWh/a	339	518	1,136	339	518	1,136
Space heating (Average climate)	Energy efficiency class					A+		-	A+		-
	Capacity		Pdesign		kW	4.70	7.80	9.52	4.70	7.80	9.52
	SCOP/A					4.20	4.50	4.26	4.20	4.50	4.26
	ηs,h				%	-		167	-		167
	Annual energy consumption				kWh/a	1,567	2,427	3,129	1,567	2,427	3,129

Indoor unit					FUA	71A	100A	125A	71A	100A	125A
Dimensions	Unit	HeightxWidthxDepth		mm	198x950x950						
Weight	Unit			kg	25.0	26.0		25.0	26.0		
Air filter	Type				Resinnet						
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	
		Heating	Low/Medium/High	m^3/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	
Sound power level	Cooling			dBA	59	64	65	59	64	65	
Sound pressure level	Cooling	Low/High		dBA	35/41	39/46	40/47	35/41	39/46	40/47	
	Heating	Low/High		dBA	35/41	39/46	40/47	35/41	39/46	40/47	
Control systems	Wired remote control				BRC1H52W/S/K / BRC1E53A/B/C / BRC1D52						
Piping connections	Drain				VP25 (OD Ø32.0)						

Outdoor unit					RZAG	71NV1	100NV1	125NV1	71NY1	100NY1	125NY1
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460						
Weight	Unit			kg	81	85	95	81	85	94	
Sound power level	Cooling			dBA	64	66	69	64	66	69	
	Heating			dBA	-		68	-		68	
Sound pressure level	Cooling	Nom.		dBA	46	47	49	46	47	49	
	Heating	Nom.		dBA	48	50	52	48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20 ~52						
	Heating	Ambient	Min.~Max.	°CWB	-20 ~18						
Refrigerant	Type/GWP				R-32/675						
	Charge			kg/TCO2Eq	3.20/2.16		3.70/2.50	3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas	OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	55	85		55	85		
		System	Equivalent	m	75	100		75	100		
			Chargeless	m	40						
	Level difference	IU - OU	Max.	m	30						
	Additional refrigerant charge			kg/m	See installation manual						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240			3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	20	32		16			

Contains fluorinated greenhouse gases

Sky Air Advance-series
BLUEVOLUTION

4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space

- Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- 5 different discharge angles between 0 and 60° can be programmed via the remote control
- Stylish modern casing finished in pure white (RAL9010) and iron grey (RAL7011) blends easily with any interior
- Optimum comfort guaranteed with automatic air flow adjustment to the required load
- Standard drain pump with 720mm lift increases flexibility and installation speed



More details and final information can be found by scanning or clicking the QR codes.

FUA-A | RZASG-MV1 | RZASG-MY1 | RZASG-MV | RZASG-MY

Efficiency data				FUA + RZASG	71A + 71MV1	100A + 100MV(1)	125A + 125MV(1)	100A + 100MY(1)	125A + 125MY(1)
Cooling capacity	Nom.			kW	6.80	9.50	12.1	9.50	12.1
Heating capacity	Nom.			kW	7.50	10.8	13.5	10.8	13.5
Space cooling	Energy efficiency class				A++	A+	-	A+	-
	Capacity		Pdesign	kW	6.80	9.50	12.1	9.50	12.1
	SEER				6.16	5.83	5.49	5.83	5.49
	ηs,c			%	-	-	217	-	217
	Annual energy consumption			kWh/a	386	570	1,322	570	1,322
Space heating (Average climate)	Energy efficiency class				A	A+	-	A+	-
	Capacity		Pdesign	kW	4.50	6.00			
	SCOP/A				3.90	4.01	3.84	4.01	3.84
	ηs,h			%	-	-	151	-	151
	Annual energy consumption			kWh/a	1,615	2,095	2,188	2,095	2,188

Indoor unit				FUA	71A	100A	125A	100A	125A
Dimensions	Unit	HeightxWidthxDepth		mm	198x950x950				
Weight	Unit			kg	25.0	26.0			
Air filter	Type				Resinnet				
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	20.0/25.5/31.0	20.5/26.5/32.5
		Heating	Low/Medium/High	m^3/min	16.0/19.5/23.0	20.0/25.5/31.0	20.5/26.5/32.5	20.0/25.5/31.0	20.5/26.5/32.5
Sound power level	Cooling			dBA	59	64	65	64	65
Sound pressure level	Cooling	Low/High		dBA	35/41	39/46	40/47	39/46	40/47
	Heating	Low/High		dBA	35/41	39/46	40/47	39/46	40/47
Control systems	Wired remote control				BRC1H52W/S/K; BRC1E53A; BRC1E53B; BRC1E53C; BRC1D52				
Piping connections	Drain				VP25 (OD Ø32.0)				

Outdoor unit				RZASG	71MV1	100MV(1)	125MV(1)	100MY(1)	125MY(1)
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320	990x940x320			
Weight	Unit			kg	60	70 (MV1/MY1) / 72 (MV/MY)			
Sound power level	Cooling			dBA	65	69	71	69	71
	Heating			dBA	-	-			
Sound pressure level	Cooling	Nom.		dBA	46	53	54	53	54
	Heating	Nom.		dBA	47	57	58	57	58
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15 ~46	-15~46	-15~46	-15~46	-15~46
	Heating	Ambient	Min.~Max.	°CWB	-15 ~15.5	-15~15.5	-15~15.5	-15~15.5	-15~15.5
Refrigerant	Type/GWP				R-32/675	R-32/675	R-32/675	R-32/675	R-32/675
	Charge			kg/TCO2Eq	2.45/1.65	2.60/1.76			
Piping connections	Liquid/ Gas	OD		mm	9.52/15.9	9.52/15.9			
	Piping length	OU - IU	Max.	m	50	50			
		System	Equivalent	m	70	70			
			Chargeless	m	30	30			
	Level difference	IU - OU	Max.	m	30.0	30.0			
	Additional refrigerant charge			kg/m	See installation manual	See installation manual			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240	1~/50 /220-240		3~/50 /380-415	
Current - 50Hz	Maximum fuse amps (MFA)			A	20	25	32	16	


Contains fluorinated greenhouse gases

SkyAir Alpha-series BLUEVOLUTION

Floor standing unit

For commercial spaces with high ceilings

- Combining with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- Improved comfort as a result of better airflow distribution from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit.
- Selectable horizontal out blow to better suit the layout of the room (via wired remote controller BRC1E*/BRC1H*)

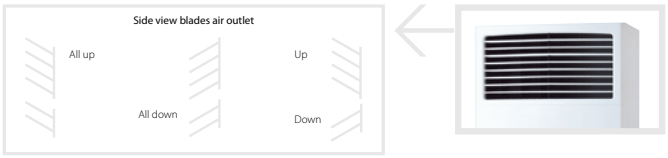



More details and final information can be found by scanning or clicking the QR codes.

FVA-A RZAG-NV1 RZAG-NY1

Efficiency data				FVA + RZAG	71A + 71NV1	100A + 100NV1	125A + 125NV1	140A + 140NV1	71A + 71NY1	100A + 100NY1	125A + 125NY1	140A + 140NY1
Cooling capacity	Nom.			kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
Heating capacity	Nom.			kW	7.50	10.8	13.5	15.5	7.50	10.8	13.5	15.5
Space cooling	Energy efficiency class				A++		-		A++		-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.4	6.80	9.50	12.1	13.4
	SEER				6.34	6.40	6.41	6.12	6.34	6.40	6.41	6.12
	ηs,c			%	-		253	242	-		253	242
	Annual energy consumption			kWh/a	376	520	1,133	1,314	376	520	1,133	1,314
Space heating (Average climate)	Energy efficiency class				A+		-		A+		-	
	Capacity		Pdesign	kW	4.70	7.80	9.52		4.70	7.80	9.52	
	SCOP/A				4.05	4.20	4.15	3.94	4.05	4.20	4.15	3.94
	ηs,h			%	-		163	155	-		163	155
	Annual energy consumption			kWh/a	1,625	2,600	3,209	3,383	1,625	2,600	3,209	3,383

Indoor unit				FVA	71A	100A	125A	140A	71A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	1,850x600x270	1,850x600x350			1,850x600x270	1,850x600x350		
Weight	Unit			kg	42	50			42	50		
Air filter	Type				Resin net							
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	14/16/18	22/25/28	24/26/28	26/28/30	14/16/18	22/25/28	24/26/28	26/28/30
		Heating	Low/Medium/High	m^3/min	14/16/18	22/25/28	24/26/28	26/28/30	14/16/18	22/25/28	24/26/28	26/28/30
Sound power level	Cooling			dBA	55	62	63	65	55	62	63	65
Sound pressure level	Cooling	Low/High		dBA	38/43	44/50	46/51	48/53	38/43	44/50	46/51	48/53
	Heating	Nom./High		dBA	41/43	47/50	48/51	51/53	41/43	47/50	48/51	51/53
Control systems	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220							
Piping connections	Drain				I.D. 20/O.D. 26							

Outdoor unit				RZAG	71NV1	100NV1	125NV1	140NV1	71NY1	100NY1	125NY1	140NY1
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460							
Weight	Unit			kg	81	85	95		81	85	94	
Sound power level	Cooling			dBA	64	66	69	70	64	66	69	70
	Heating			dBA	-		68	71	-		68	71
Sound pressure level	Cooling	Nom.		dBA	46	47	49	50	46	47	49	50
	Heating	Nom.		dBA	48	50	52		48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20 ~52							
	Heating	Ambient	Min.~Max.	°CWB	-20 ~18							
Refrigerant	Type/GWP				R-32/675							
	Charge			kg/TCO2Eq	3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas	OD		mm	9.52/15.9							
	Piping length	OU - IU	Max.	m	55	85			55	85		
		System	Equivalent	m	75	100			75	100		
			Chargeless	m	40							
	Level difference	IU - OU	Max.	m	30							
	Additional refrigerant charge			kg/m	See installation manual							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	20	32			16			


Contains fluorinated greenhouse gases

Sky Air Advance-series
BLUEVOLUTION

Floor standing unit

For commercial spaces with high ceilings

- Combination with Sky Air Advance-series ensures good value for money for all types of commercial applications
- Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- Improved comfort as a result of better airflow distribution from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit.
- Selectable horizontal out blow to better suit the layout of the room (via wired remote controller BRC1E*/BRC1H*)

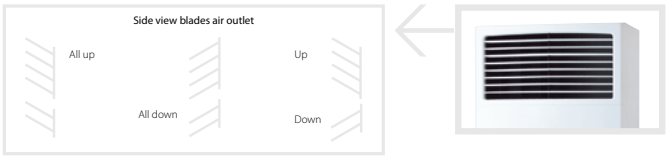



More details and final information can be found by scanning or clicking the QR codes.

FVA-A | RZASG-MV1 | RZASG-MY1 | RZASG-MV | RZASG-MY

Efficiency data				FVA + RZASG	71A + 71MV1	100A + 100MV(1)	125A + 125MV(1)	140A + 140MV(1)	100A + 100MY(1)	125A + 125MY(1)	140A + 140MY(1)
Cooling capacity	Min./Nom./Max.			kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Min./Nom./Max.			kW	7.50	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class				A+	A+	-		A+	-	
	Capacity		Pdesign	kW	6.80	9.50	12.1	13.4	9.50	12.1	13.4
	SEER				5.83	5.72	5.52	5.63	5.72	5.52	5.63
	ηs,c			%	-	-	218	222	-	218	222
	Annual energy consumption			kWh/a	408	581	1,314	1,428	581	1,314	1,428
Space heating (Average climate)	Energy efficiency class				A+	A	-		A	-	
	Capacity		Pdesign	kW	4.50	6.00		7.80	6.00		7.80
	SCOP/A				4.04	3.83	3.64	3.81	3.83	3.64	3.81
	ηs,h			%	-	-	143	149	-	143	149
	Annual energy consumption			kWh/a	1,559	2,193	2,308	2,866	2,193	2,308	2,866

Indoor unit				FVA	71A	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth	mm	1,850x600x270	1,850x600x350						
Weight	Unit		kg	42	50						
Air filter	Type			Resinnet							
Fan	Air flow rate	Cooling	Low/Medium/High m^3/min	14/16/18	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30	
		Heating	Low/Medium/High m^3/min	14/16/18	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30	
Sound power level	Cooling		dBA	55	62	63	65	62	63	65	
Sound pressure level	Cooling	Low/Medium/High	dBA	38/41/43	44/47/50	46/48/51	48/51/53	44/47/50	46/48/51	48/51/53	
	Heating	Medium/Nom./High	dBA	38/41/43	44/47/50	46/48/51	48/51/53	44/47/50	46/48/51	48/51/53	
Control systems	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52							
Power supply	Phase - Frequency - Voltage		Hz - V	1~ - 50/60 - 220-240/220							


Outdoor unit				RZASG	71MV1	100MV(1)	125MV(1)	140MV(1)	100MY(1)	125MY(1)	140MY(1)
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320						
Weight	Unit		kg	60	70 (MY1) / 72 (MY)			78 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)
Sound power level	Cooling		dBA	65	70	71	73	70	71	73	
	Heating		dBA	-		71	73	-	71	73	
Sound pressure level	Cooling	Nom.	dBA	46	53		54	53		54	
	Heating	Nom.	dBA	47	57						
Operation range	Cooling	Ambient	Min.~Max. °CDB	-15~46							
	Heating	Ambient	Min.~Max. °CWB	-15~15.5							
Refrigerant	Type/GWP			R-32/675							
	Charge		kg/TCO2Eq	2.45/1.65	2.60/1.76			2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD	mm	9.52/15.9							
	Piping length	OU - IU	Max. m	50							
		System	Equivalent m	70							
			Chargeless m	30							
	Additional refrigerant charge		kg/m	See installation manual							
	Level difference IU - OU		Max. m	30.0							
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240					3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)		A	20	25		32		16		

Contains fluorinated greenhouse gases

Floor standing unit

For commercial spaces with high ceilings

› Ideal solution for small businesses and shops
› Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
› Improved comfort as a result of better airflow distribution from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit.
› Selectable horizontal out blow to better suit the layout of the room (via wired remote controller BRC1E*/BRC1H*)

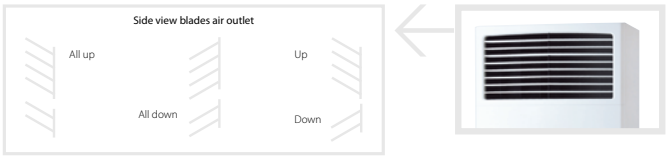



More details and final information can be found by scanning or clicking the QR codes.

FVA-A AZAS-MV AZAS-MY

Efficiency data				FVA + AZAS	100A + 100MV	125A + 125MV	140A + 140MV	100A + 100NY	125A + 125NY	140A + 140NY
Cooling capacity	Nom.			kW	9.50	12.1	13.4	9.50	12.1	13.4
Heating capacity	Nom.			kW	10.8	13.5	15.5	10.8	13.5	15.5
Space cooling	Energy efficiency class				A	-		A	-	
	Capacity		Pdesign	kW	9.50	12.1	13.4	9.50	12.1	13.4
	SEER				5.5	5.3	5.4	5.5	5.3	5.4
	ηs,c			%	-	209	213	-	209	213
	Annual energy consumption			kWh/a	605	1,370	1,489	605	1,370	1,489
Space heating (Average climate)	Energy efficiency class				A	-		A	-	
	Capacity		Pdesign	kW	6.00		7.80	6.00		7.80
	SCOP/A				3.79	3.56	3.81	3.79	3.56	3.81
	ηs,h			%	-	139	149	-	139	149
	Annual energy consumption			kWh/a	2,217	2,360	2,866	2,217	2,360	2,866

Indoor unit				FVA	100A	125A	140A	100A	125A	140A
Dimensions	Unit	HeightxWidthxDepth		mm	1,850x600x350			1,850x600x350		
Weight	Unit			kg	50			50		
Air filter	Type				Resin net					
Fan	Air flow rate	Cooling	Low/Medium/High	m^3/min	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30
		Heating	Low/Medium/High	m^3/min	22/25/28	24/26/28	26/28/30	22/25/28	24/26/28	26/28/30
Sound power level	Cooling			dBA	62	63	65	62	63	65
Sound pressure level	Cooling	Low/High		dBA	44/50	46/51	48/53	44/50	46/51	48/53
	Heating	Nom./High		dBA	47/50	48/51	51/53	47/50	48/51	51/53
Control systems	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220					
Piping connections	Drain				I.D. 20/O.D. 26					

Outdoor Unit				AZAS	100MV	125MV	140MV	100MY	125MY	140MY
Dimensions	Unit	HeightxWidthxDepth		mm	990x940x320					
Weight	Unit			kg	72		79	72		79
Sound power level	Cooling			dBA	70	71	72	70	71	72
	Heating			dBA	70	71	72	70	71	72
Sound pressure level	Cooling	Nom.		dBA	53	54	55	53	54	55
	Heating	Nom.		dBA	57	58	59	57	58	59
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46					
	Heating	Ambient	Min.~Max.	°CWB	-15~15.5					
Refrigerant	Type/GWP				R-32/675					
	Charge			kg/TCO2Eq	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD		mm	9.52/15.9					
	Piping length	OU - IU	Max.	m	30					
		System	Equivalent	m	50					
			Chargeless	m	30					
	Additional refrigerant charge			kg/m	See installation manual					
	Level difference IU - OU		Max.	m	30.0					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240			3~/50/380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	25	32		16		


Contains fluorinated greenhouse gases

Sky Air Alpha-series BLUEVOLUTION

Concealed floor standing unit

Designed to be concealed in walls

- Combination with Sky Air Alpha-series ensures best in class quality, highest efficiency and performance
- Discretely concealed in the wall: only the suction and discharge grilles are visible
- Requires very little installation space as the depth is only 200mm
- Its low height (620 mm) enables the unit to fit perfectly beneath a window
- High ESP allows flexible installation

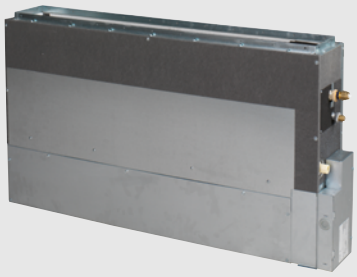

FNA-A9



RZAG35-60A



BRC1H52W BRP069C81

More details and final information can be found by scanning or clicking the QR codes.

FNA-A9 RZAG-A

Efficiency data				FNA + RZAG	35A9 + 35A	50A9 + 50A	60A9 + 60A
Cooling capacity	Min./Nom./Max.			kW	1.6/3.5/4.5	1.7/5.0/6.0	1.7/6.0/6.5
Heating capacity	Min./Nom./Max.			kW	1.40/4.00/5.00	1.70/5.00/6.00	1.70/7.00/7.50
Space cooling	Energy efficiency class					A+	
	Capacity		Pdesign	kW	3.50	5.00	6.00
	SEER				5.90		5.70
	Annual energy consumption			kWh/a	208	297	368
Space heating (Average climate)	Energy efficiency class					A	
	Capacity		Pdesign	kW	3.50	4.30	4.50
	SCOP/A					3.90	
	Annual energy consumption			kWh/a	1,255	1,542	1,616

Indoor unit				FNA	35A9	50A9	60A9
Dimensions	Unit	HeightxWidthxDepth		mm	620/720x790x200	620/720x1,190x200	
Weight	Unit			kg	23.0	30.0	
Air filter	Type				Resin net		
Fan	Air flow rate	Cooling	Low/High	m^3/min	7.3/8.7	13.5/16.0	
		Heating	Low/High	m^3/min	7.3/8.7	13.5/16.0	
	External static pressure	Nom./High		Pa	30/48	40/49	
Sound power level	Cooling			dBA	53.0	56.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	28.0/31.0/33.0	30.0/33.0/36.0	
	Heating	Low/Nom./High		dBA	28.0/31.0/33.0	30.0/33.0/36.0	
Control systems	Infrared remote control				BRC4C65		
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220		


Outdoor unit				RZAG	35A	50A	60A
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373		
Weight	Unit			kg	52		
Sound power level	Cooling			dBA	62.0	63.0	64.0
	Heating			dBA	62.0	63.0	64.0
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0
	Heating	Nom.		dBA	48.0	49.0	50.0
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52		
	Heating	Ambient	Min.~Max.	°CWB	-20~24		
Refrigerant	Type/GWP				R-32/675.0		
	Charge			kg/TCO2Eq	1.55/1.05		
Piping connections	Liquid/Gas OD			mm	6.35/9.52	6.35/12.7	
	Piping length	OU - IU	Max.	m	50		
		System	Chargeless	m	30		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)		
	Level difference	IU - OU	Max.	m	30.0		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		

Contains fluorinated greenhouse gases

Concealed floor standing unit

Designed to be concealed in walls

- Combination with split outdoor units is ideal for small retail, offices and residential applications
- Discretely concealed in the wall: only the suction and discharge grilles are visible
- Requires very little installation space as the depth is only 200mm
- Its low height (620 mm) enables the unit to fit perfectly beneath a window
- High ESP allows flexible installation

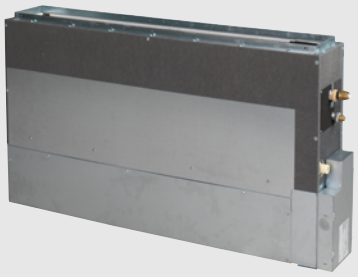

FNA-A9



RXM-R



BRC1H52W BRP069C81

More details and final information can be found by scanning or clicking the QR codes.


FNA-A9 RXM-R RXM-R9 RXM-A

Efficiency data				FNA + RXM	25A9 + 25R9	35A9 + 35R9	50A9 + 50A	60A9 + 60R
Cooling capacity	Nom.			kW	2.60	3.40	5.00	6.00
Heating capacity	Nom.			kW	3.20	4.00	5.80	7.00
Power input	Cooling	Nom.		kW	0.68	1.10	1.48	2.22
	Heating	Nom.		kW	0.80	1.15	1.74	2.25
Space cooling	Energy efficiency class					A+		A
	Capacity	Pdesign		kW	2.60	3.40	5.00	6.00
	SEER				5.68	5.70	5.77	5.56
	Annual energy consumption			kWh/a	160	209	303	378
Space heating (Average climate)	Energy efficiency class					A+		
	Capacity	Pdesign		kW	2.80	2.90	4.00	4.60
	SCOP/A				4.24	4.05	4.09	4.16
	Annual energy consumption			kWh/a	924	1,002	1,368	1,547
Nominal efficiency	EER				3.80	3.09	3.38	2.70
	COP				4.00	3.48	3.34	3.11
	Annual energy consumption			kWh	342	550	740	1,111
	Energy labeling Directive	Cooling/Heating			A/A	B/B	A/C	D/D

Indoor unit				FNA	25A9	35A9	50A9	60A9
Dimensions	Unit	HeightxWidthxDepth		mm	620/720x790x200		620/720x1,190x200	
Weight	Unit			kg	23.0		30.0	
Air filter	Type				Resinnet			
Fan	Air flow rate	Cooling	Low/High	m^3/min	7.3/8.7		13.5/16.0	
		Heating	Low/High	m^3/min	7.3/8.7		13.5/16.0	
	External static pressure	Nom./High		Pa	30/48		40/49	
Sound power level	Cooling			dBA	53.0		56.0	
Sound pressure level	Cooling	Low/Medium/High		dBA	28.0/31.0/33.0		30.0/33.0/36.0	
	Heating	Low/Nom./High		dBA	28.0/31.0/33.0		30.0/33.0/36.0	
Control systems	Infrared remote control				BRC4C65			
	Wired remote control				BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220			

							NEW	
Outdoor unit				RXM	25R9	35R9	50A	60R
Dimensions	Unit	HeightxWidthxDepth		mm	552x840x350		734x954x401	
Weight	Unit			kg	32		49.0	
Sound pressure level	Cooling	Nom.		dBA	46.0	49.0	48.0	
	Heating	Nom.		dBA	47.0	49.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46			
	Heating	Ambient	Min.~Max.	°CWB	-15~18			
Refrigerant	Type				R-32			
	GWP				675		675.0	
	Charge			kg/TCO2Eq	0.76/0.52		1.15/0.780	
Piping connections	Liquid	OD		mm	6.35			
	Gas	OD		mm	9.52		12.7	
	Piping length	OU - IU	Max.	m	20		30	
		System	Chargeless	m	10			
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)			
	Level difference	IU - OU	Max.	m	15		20.0	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240			
Current - 50Hz	Maximum fuse amps (MFA)			A	13		16	

Contains fluorinated greenhouse gases

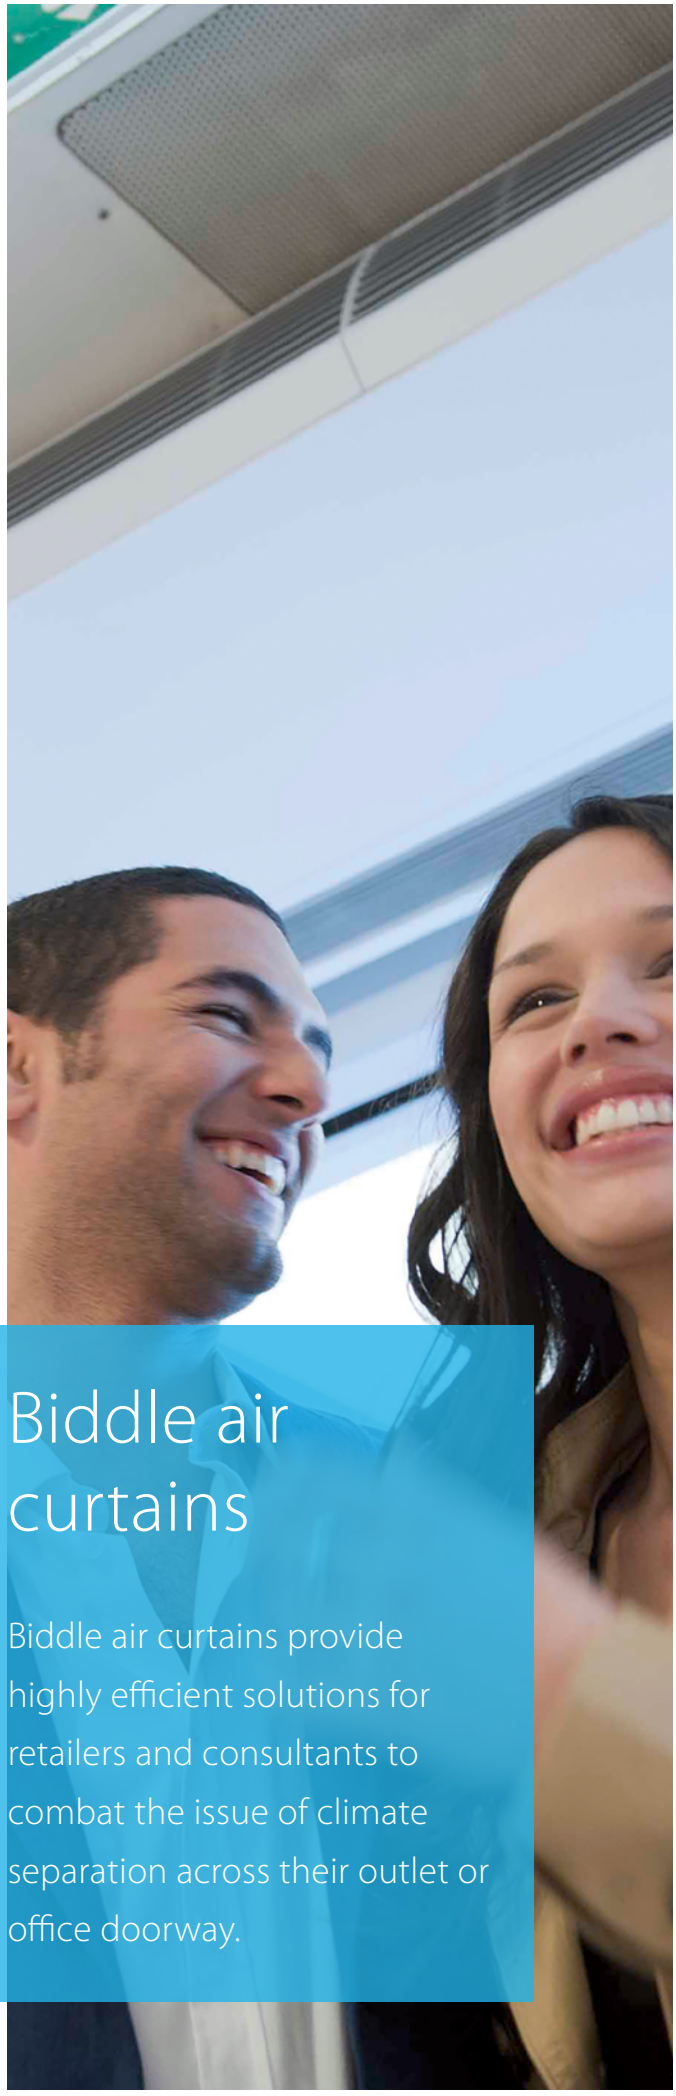


Biddle air curtains

Biddle air curtains provide highly efficient solutions for retailers and consultants to combat the issue of climate separation across their outlet or office doorway.

Benefits of Biddle air curtains

› Connectable to ERQ and VRV units
› Unified range for R-32 and R-410A refrigerant
› payback period of less then 1.5 years compared to installing an electric air curtain

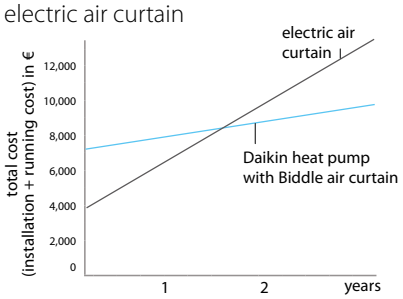


3 different models to choose from:



Free-hanging model (F):
easy wall mounted installation




Cassette model (C):
mounted into a false ceiling leaving only the decoration panel visible




Recessed model (R):
neatly concealed in the ceiling

Select your Biddle air curtain range

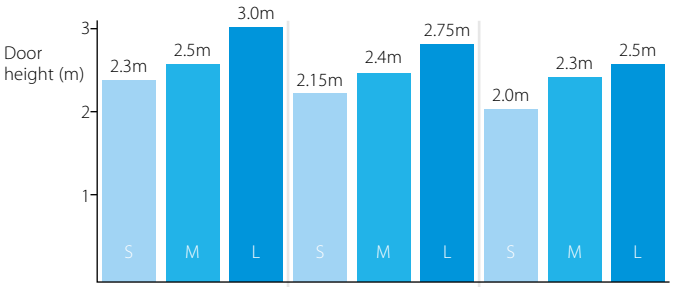

Installation condition	Favourable	Normal	Unfavourable
	ex: covered shopping mall or revolving door entrance	ex: little direct wind, no opposite open doors, building with ground floor only	ex: location at a corner or square, multiple floors and / or open stairwell

Biddle air curtain nomenclature

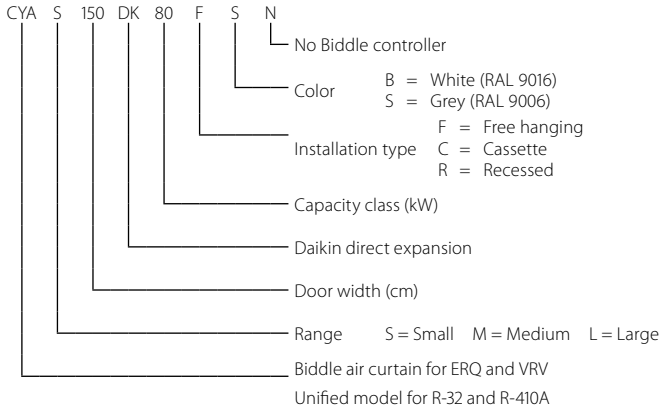


Biddle air curtain

New R-32 range

- Connectable to ERQ and VRV DX outdoor units
- Unified model for R-32 and R-410A refrigerant
- Free-hanging model (F): easy wall mounted installation
- Cassette model (C): mounted into a false ceiling leaving only the decoration panel visible
- Recessed model (R): neatly concealed in the ceiling
- A payback period of less then 1.5 years compared to installing an electric air curtain
- Provides virtually free air curtain heating via recovered heat from indoor units in cooling mode (in case of VRV heat recovery)
- Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required




CYA150DK80FSC



CYA150DK80CSC



CYA150DK80RSC

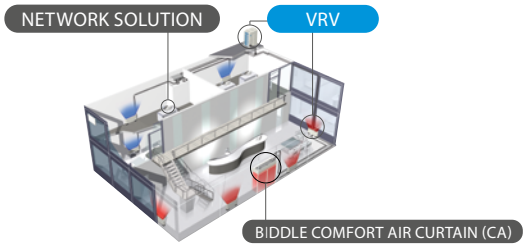


More details and final information can be found by scanning or clicking the QR codes.

CYA

					Small				Medium			
					CYAS100DK80*	CYAS150DK80*	CYAS200DK100*	CYAS250DK140*	CYAM100DK80*	CYAM150DK80*	CYAM200DK100*	CYAM250DK140*
Heating capacity	Speed 3			kW	6,94	8,6	10,9	15,2	8,65	10,5	12,5	18,6
Power input	Fan only	Nom.		kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67
	Heating	Nom.		kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67
Delta T	Speed 3			K	17,7	14,6	13,9	15,5	16	12,9	12,7	13,8
Casing	Colour				B: RAL9016 / S: RAL9006				B: RAL9016 / S: RAL9006			
Dimensions	Unit	Height F/C/R		mm	270/270/270				270/270/270			
		Width F/C/R		mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548
		Depth F/C/R		mm	590/821/561				590/821/561			
Required ceiling void >	mm			mm	420				420			
Door height	Max.			m	2,3				2,5			
Door width	Max.			m	1	1,5	2	2,5	1	1,5	2	2,5
Weight	Unit			kg	56/59/61	66/83/88	83/102/108	107/129/137	57/68/66	73/88/93	94/111/117	108/136/144
Fan		Speed 3		m^3/h	1164	1746	2328	2910	1605	2408	2910	4013
Sound pressure level	Heating	Speed 3		dBA	47	49	50	51	50	51	53	54
Refrigerant	GWP				675/2087,5				675/2087,5			
	Type				R32/R410A				R32/R410A			
Piping connections	Liquid	OD		mm	6,35		9,52		6,35		9,52	
	Gas	OD		mm	12,7		15,9		12,7		15,9	
Air filter	Type				Vacuum cleanable filter G1							
Power supply	Frequency			Hz	50Hz				50Hz			
	Voltage			V	230V				230V			
	Maximum fuse amps (MFA)			A	16				16			

					Large			
					CYAL100DK125*	CYAL150DK200*	CYAL200DK250*	CYAL250DK250*
Heating capacity	Speed 3			kW	14,4	21,5	27,6	29,7
Power input	Fan only	Nom.		kW	0,48	0,72	0,96	1,20
	Heating	Nom.		kW	0,48	0,72	0,96	1,20
Delta T	Speed 3			K	13,8	13,7	13,2	11,4
Casing	Colour				B: RAL9016 / S: RAL9006			
Dimensions	Unit	Height F/C/R		mm	370/370/370			
		Width F/C/R		mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548
		Depth F/C/R		mm	774/1105/745			
Required ceiling void >	mm			mm	520			
Door height	Max.			m	3			
Door width	Max.			m	1	1,5	2	2,5
Weight	Unit			kg	76/81/83	100/118/141	126/151/155	157/190/196
Fan		Speed 3		m^3/h	3100	4650	6200	7750
Sound pressure level	Heating	Speed 3		dBA	53	54	56	57
Refrigerant	GWP				675/2087,5			
	Type				R32/R410A			
Piping connections	Liquid	OD		mm	9,522			
	Gas	OD		mm	15,9	19,1	19,1	
Air filter	Type				Vacuum cleanable filter G1			
Power supply	Frequency			Hz	50Hz			
	Voltage			V	230V			
Current	Maximum fuse amps (MFA)			A	16			

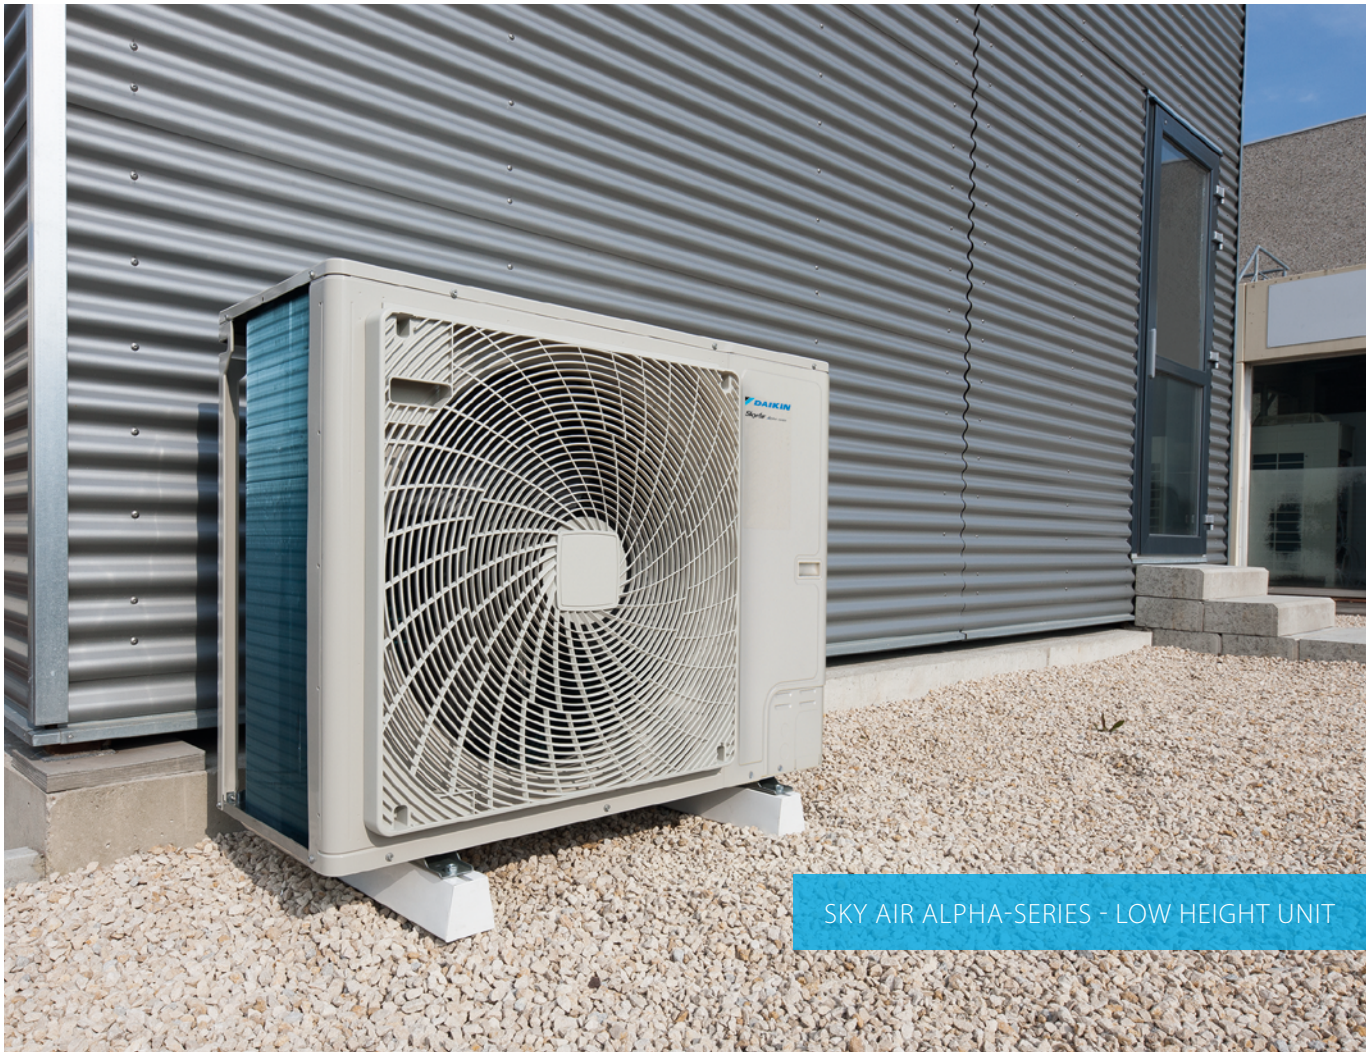

SKY AIR ALPHA-SERIES - LOW HEIGHT UNIT



LOW SOUND ENCLOSURE FOR SKY AIR
ALPHA-SERIES (RZAG-N) AND ADVANCE-SERIES (RZA-D)


Outdoor units

A range of industry leading technology outdoor units


Products overview outdoor units 444
Benefits overview outdoor units 445
Sky Air A-series 446
Low sound enclosure 447
Variable Refrigerant Temperature 448
Replacement technology 449

R-32 BLUEVOLUTION range 450
RZAG-A Sky Air Alpha-series 450
RZAG-NV1/NY1 Sky Air Alpha-series 450
RZASG-MV(1)/MY(1) Sky Air Advance-series 451
RZA-D Sky Air Advance-series 452
ARXM-R/
AZAS-MV/MY Sky Air Active-series 453
Multi model and VRV range
See Split or VRV chapter
Options & Accessories 454

Pair solution

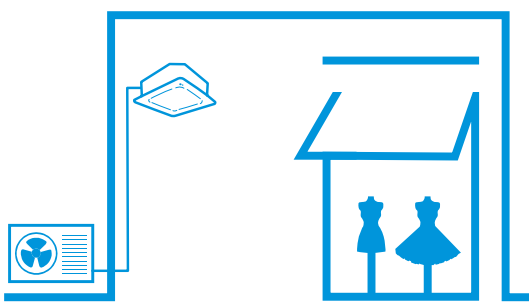

Twin, triple, double twin solution

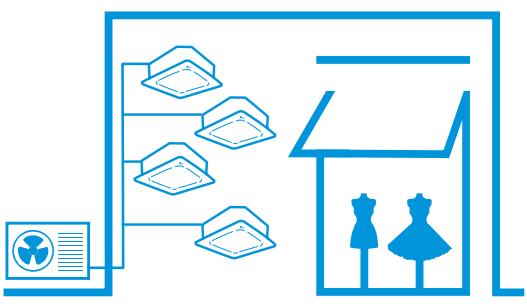

Products overview outdoor units



Pair, twin, triple & double twin application

BLUEVOLUTION

R-32

SkyAir A-series

System	Type	Model	Product name	35	50	60	71	100	125	140	200	250
				3.5 kW	5.0 kW	6.0 kW	6.8 kW	9.5 kW	12.1 kW	13.4 kW	21.5 kW	23.6 kW
Air cooled	Heat pump	SkyAir Alpha-series R-32 A++ (A+++ - D) - Industry leading technology for commercial applications - Dedicated solution for infrastructure cooling - Variable Refrigerant Temperature (RZAG71-100-125-140 series) - Maximum piping length up to 85m (50m for RZAG35-50-60) - Replacement technology - Extended operation range down to -20°C in both heating and cooling - Pair, twin, triple and double twin application (RZAG71-100-125-140 series)	RZAG-A RZAG-NV1/NY1									
		SkyAir Advance-series R-32 A+ (A+++ - D) - Technology and comfort combined for commercial applications - Very compact and easy to install outdoor units - Maximum piping length up to 50m (RZA-D up to 100m) - Replacement technology - Operation range down to -15°C both cooling and in heating (RZA-D down to -20°C) - Pair, twin, triple and double twin application	RZASG-MV(1)/MY(1)									
			RZA-D									
		SkyAir Active-series R-32 A (A+++ - D) - Ideal solution for busy environments and small shops - Very compact and easy to install outdoor units - Maximum piping length up to 30m - Replacement technology - Easy-to-mount outdoor units: roof, terrace or wall - Exclusively offered for pair applications	ARXM-RAZAS-MV/MY									

Benefits overview outdoor units

			SkyAir Alpha-series		SkyAir Advance-series		SkyAir Active-series	SkyAir Active-series
			RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY	ARXM-R(9)
								
We care icons	Seasonal efficiency - Smart use of energy	Seasonal efficiency gives a more realistic indication on how efficient air conditioners operate over an entire heating or cooling season.	A++ (A+++ - D)	A++ (A+++ - D)	A+ (A+++ - D)	-	A (A+++ - D)	A (A+++ - D)
We care icons	Inverter technology	Inverter compressors continuously adjust compressor speed to actual demand. Fewer power-consuming starts and stops result in decreased energy consumption (up to 30%) and more stable temperatures.	●	●	●	●	●	●
We care icons	Replacement technology	Quick and quality system replacement in the most cost effective way	●	●	●	●	●	●
Comfort	Night quiet	Lowers the operation sound of the outdoor unit automatically.	●	●	●	●	●	●
Comfort	Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature.	●	●	●	●	●	●
Other functions	Variable refrigeration temperature	The intelligent systems ensures highest energy savings with additional comfort to better suit application requirements.		●				
Other functions	Twin/triple/double twin application	2, 3 or 4 indoor units can be connected to only 1 outdoor unit. All indoor units operate within the same mode (cooling or heating) from one remote control.		●	●	●		
Other functions	Swing compressor	Outdoor units are fitted with a swing compressor, renowned for its low noise and high reliability	●	●	●	●	●	●
Other functions	Guaranteed operation down to -20°C	Daikin is suitable for all climates, even withstanding severe winter conditions with an operation range down to -20°C.	●	●		●		
Other functions	Infrastructure cooling	For high sensible, infrastructure cooling applications, dedicated infrastructure cooling settings and allowing asymmetric combinations enhance the system's reliability.	●	●				
Other functions	Low sound enclosure	Dedicated Daikin developed and tested low sound enclosure, reducing sound power by up to -10 dB(A)		o		o		

Technical benefit overview

SkyAir A-series

	SkyAir Alpha-series		SkyAir Advance-series		SkyAir Active-series	SkyAir Active-series
	RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY	ARXM-R(9)
Compact single fan casing on the entire range	●	●	●	●	●	●
Maximum piping length	50 m	85 m	50 m	100 m	30 m	30 m
Pivoting front plate		●		●		
7 segment display		●	●	●	●	●
Increased factory charge	●	●				
Integrated leak check		●				
Refrigerant bottom plate pass		●				
Specially deveoloped R-32 swing compressor	●	●	●	●	●	●
Refrigerant cooled PCB		●	●	●	●	●
Intelligent Tablet controller - Onecta app	o	o	o	o	o	o


● standard, o optional

Sky Air Alpha-series


Low height.
High value.



Unique, low-height single fan range



Compact unit, easy to transport



Market-leading serviceability and handling



Fast and easy access to all critical component

- Single screw access
- Wider access area



Newly positioned handle for easier carrying



Low sound enclosure

EKLN140A

– 10 dB(A)!

Benefits

Dedicated Daikin option for:
- Sky Air Alpha-series
- Sky Air Advance-series
- VRV 5 S-series

Fully optimised and tested in Daikin factory
- Guaranteed performance levels (sound, capacity, efficiency)

Outdoor unit sound reduction of up to -10 dB(A) on sound power levels
- Enabling to meet local sound requirements
- Increased flexibility to apply outdoor units
- Reduces sound on the entire sound spectrum

Minimal capacity reduction
- Separated air intake and discharge to prevent air flow short circuit
- No additional calculations needed thanks to factory tested data

Easy to integrate
- Anthracite (RAL 7016), highly aesthetic finishing
- Mechanically designed to perfectly suit the Sky Air Alpha/ Advance and VRV 5 S-series casings
- Self-supporting; can be installed on any flat surface


Fast & easy installation & servicing
- 100 % weather resistant
- Easy opening to access most system components

Durable
- 3 years warranty on all components
- Made of stainless steel with robust double layer powder coating, ensuring maximum corrosion resistance

Tried and tested: values that you can rely on

Our low sound enclosure eliminates possible problems and reduces your workload significantly:

- **No incompatibilities** – tested combinations with the outdoor unit that you want to encase
- **No surprises** – measured and guaranteed sound reduction according to ISO 3744
- **No calculations** – tested performance values for capacity and efficiency

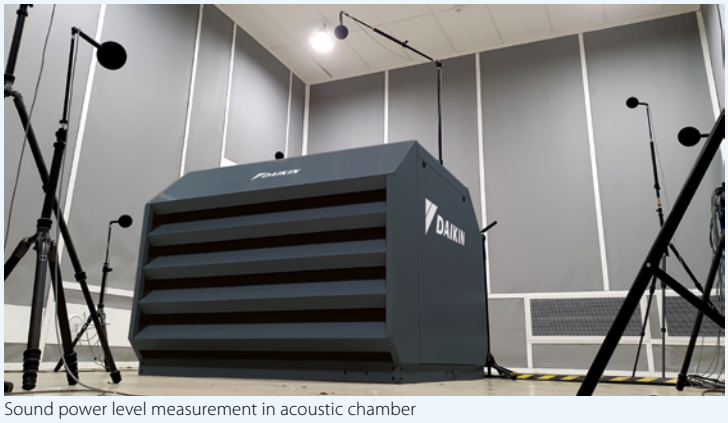

Sound power level measurement in acoustic chamber



Sound enclosure				EKLN140A
Casing	Colour			Anthracite (RAL 7016)
	Material			Sheet metal
Dimensions	Unit	Height	mm	1,100
		Width	mm	1,400
		Depth	mm	1,500
	Packed unit	Height	mm	1,017
		Width	mm	1,517
		Depth	mm	917
Weight	Unit		kg	152
	Packed unit		kg	186
Combines with	Sky Air Alpha-series			RZAG-NV1/NY1
	Sky Air Advance-series			RZA-D
	VRV 5 S-series			RXYSA-AV1/AY1




Variable Refrigerant Temperature

The ultimate customer experience

- ☑ Increases air discharge temperature and eliminates cold drafts!
- ☑ Increased customer comfort and reduced energy consumption!

› The system automatically increases its evaporating temperature (Te) when the gap between the actual indoor temperature (Tin) and the setpoint (Tset) is becoming smaller, increasing comfort and providing more stable operation

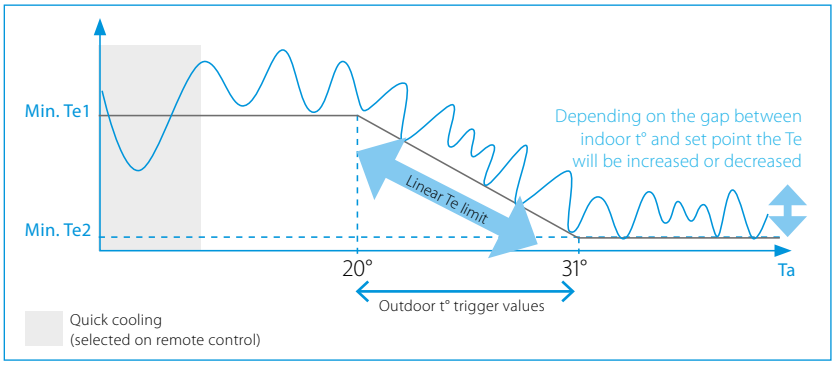


Case study: JBC, Vilvoorde

- ☑ Two pair systems are installed in the same zone allowing comparison

- ☑ More energy efficient: up to 20% lower energy consumption

Average energy consumption over 5 months of operation

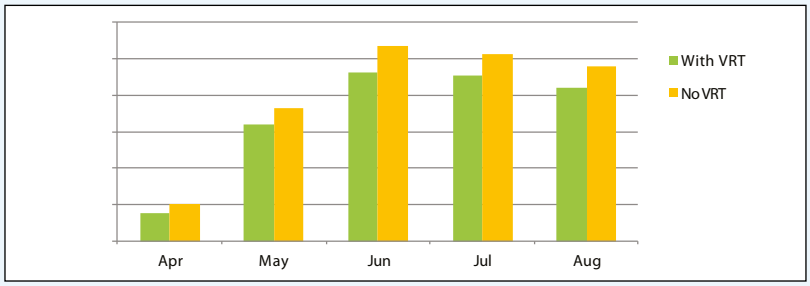

- ☑ Improved comfort: higher discharge temperatures

› More stable and continuous operation
› Average discharge temperature increased with 3~4°C





Replacement technology

The quick and quality way of upgrading R-22 and R-410A systems

Benefits to increase your profit

Optimise your business

Less installation time
Tackle more projects in less time thanks to faster installation. It is more profitable than replacing the full system with new piping.

Lower installation costs
Reducing installation costs enables you to offer customers the most cost-effective solution and improve your competitive edge.

Replace non-Daikin systems

NON DAIKIN > DAIKIN

It is a trouble-free replacement solution for Daikin systems and for systems made by other manufacturers.

Easy as one-two-three
A simple solution for replacement technology enables you to handle more projects for more customers in less time and offer them the best price! Everybody gains.

The benefits will convince your customer

- ☑ To prevent unexpected breakdown
- ☑ To lower running costs
- ☑ To protect the environment
- ☑ To improve comfort


Your copper pipes will last for multiple generations

- copper pipes used in air conditioning systems tested by Daikin will last over 60 years after installation.

How does it work?

The Daikin low-cost upgrade solution

! Replace indoor units
Contact your local dealer to check compatibility in case you need to keep the indoor units.

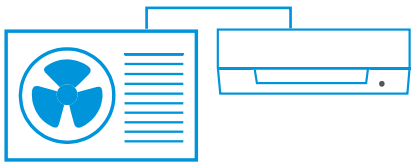


✓ Replace outdoor units


Learn more about Daikin replacement solutions at www.daikin.eu/en_us/knowledge-center/replacement-technology.html


Unique technologies

› Cleaning free piping re-usage thanks to unique hepta filtering for maximum particle reduction

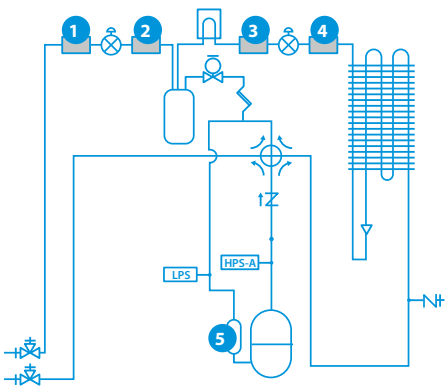








› New expansion valve needle material, with high corrosion resistance
› New type oil for maximum system protection

R-32

SkyAir Alpha-series BLUEVOLUTION

Sky Air Alpha-series

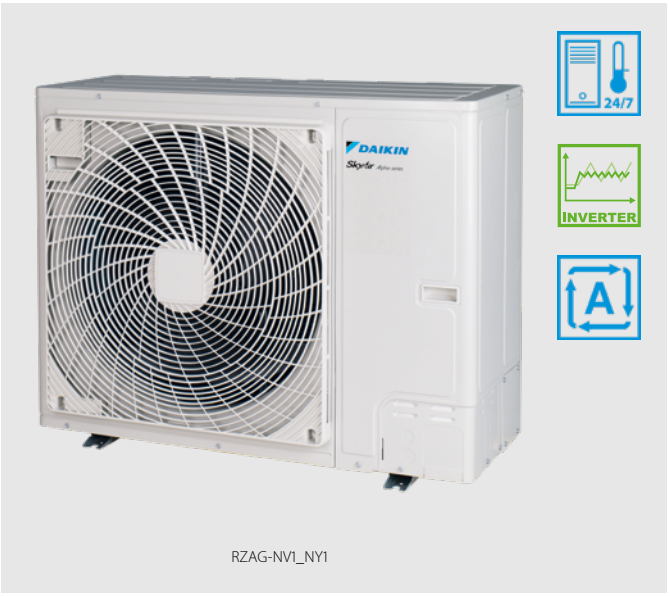

RZAG-NV1_NY1

Industry leading technology for commercial applications and even for technical rooms

- Unique, low-height single fan range
- Compact dimensions allow almost unoticeable installation
- Market-leading serviceability and handling, thanks to wide access area, 7-segment display and additional handle
- The perfect balance in efficiency and comfort thanks to Variable Refrigerant Temperature: top seasonal efficiency throughout most of the year and quick reaction speed on the hottest days.
- Suits high sensible, infrastructure cooling applications
- Replace existing systems with R-32 technology without needing to replace the piping
- Guarantees operation in both heating and cooling mode down to -20°C
- Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- Maximum piping length up to 85m (50m for RZAG-A)
- Outdoor units for pair, twin, triple, double twin application
- Combines with EKLN-A low sound enclosure

Comfort cooling combination table

		FCAHG-H				FCAG-B							FFA-A9			FDA-A	FDXM-F9			FBA-A(9)					FHA-A(9)								FAA-B		FTXM-R			FUA-A			FNA-A9		FVA-A			
capacity class		71	100	125	140	35	50	60	71	100	125	140	35	50	60	125	35	50	60	35	50	60	71	100	125	140	35	50	60	71	100	125	140	71	100	35	50	60	71	71	100	125	35	50	60	71	100	125	140
RZAG35A						P							P				P			P							P										P							P						
RZAG50A							P							P				P			P							P										P							P						
RZAG60A								P							P				P				P						P										P							P					
RZAG71NV1	RZAG71NY1	P				2			P				2				2			2			P				2			P				P					P				2			P			
RZAG100NV1	RZAG100NY1		P			3	2			P			3	2			3	2		3	2			P			3	2			P			P					P				3	2			P		
RZAG125NV1	RZAG125NY1			P		4	3	2			P		4	3	2	P	4	3	2	4	3	2			P		4	3	2			P									P		4	3	2			P	
RZAG140NV1	RZAG140NY1	2			P	4	3		2			P	4	3			4	3		4	3		2			P	4	3		2			P	2					2			4	3		2			P

P = pair application; 2/3/4 = twin/triple/double twin application

Infrastructure cooling combination table

		FTXM-R				FAA-B			FHA-A(9)					FBA-A(9)							FDXM-F9			FUA-A			FNA-A9			FVA-A				FFA-A9			FCAHG-H				FCAG-B						
capacity class		35	50	60	71	71	100	125	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	35	50	60	71	100	125	140	35	50	60	71	100	125	140	35	50	60	71	100	125	140
RZAG35A			P							P							P							P						P						P							P						
RZAG50A				P							P							P							P						P						P							P					
RZAG60A					P							P							P							P													P							P			
RZAG71NV1	RZAG71NY1						P	3	2			P				3	2			P			3	2			P		3	2			P			3	2			P			3	2			P		
RZAG100NV1	RZAG100NY1					2		4	3		2			P	4	3		2			P	4	3		2			4	3			P	4	3		2			P	4	3		2			P
RZAG125NV1	RZAG125NY1					2		4	3		2			P	4	3		2			P	4	3		2			4	3			P	4	3		2			P	4	3		2			P
RZAG140NV1	RZAG140NY1					2		4	3		2			P	4	3		2			P	4	3		2			4	3			P	4	3		2			P	4	3		2			P

P = Pair, 2 = Twin, 3 = Triple, 4 = Double twin; For more information on infrastructure cooling options refer to infrastructure cooling catalogue.

More details and final information can be found by scanning or clicking the QR codes.

RZAG-A RZAG-NV1 RZAG-NY1

Outdoor unit				RZAG	35A	50A	60A	71NV1	100NV1	125NV1	140NV1	71NY1	100NY1	125NY1	140NY1
Dimensions	Unit	HeightxWidthxDepth		mm	734x870x373			870x1,100x460							
Weight	Unit			kg	52			81	85	95		81	85	94	
Sound power level	Cooling			dBA	62.0	63.0	64.0	64	66	69	70	64	66	69	70
	Heating			dBA	62.0	63.0	64.0	-		68(1)	71(1)	-		68(1)	71(1)
Sound pressure level	Cooling	Nom.		dBA	48.0	49.0	50.0	46	47	49	50	46	47	49	50
	Heating	Nom.		dBA	48.0	49.0	50.0	48	50	52		48	50	52	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~52			-20~52							
	Heating	Ambient	Min.~Max.	°CWB	-20~24			-20~18							
Refrigerant	Type/GWP				R-32/675.0			R-32/675							
	Charge			kg/TCO2Eq	1.55/1.05			3.20/2.16		3.70/2.50		3.20/2.16		3.70/2.50	
Piping connections	Liquid/Gas	OD		mm	6.35/9.52	6.35/12.7		9.52/15.9							
	Piping length	OU - IU	Max.	m	50			55	85			55	85		
		System	Equivalent	m	-			75	100			75	100		
			Chargeless	m	30			40							
	Level difference	IU - OU	Max.	m	30.0			30							
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)			See installation manual							
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240							3~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	-			20	32			16			

(1)According to ENER Lot 21 | Contains fluorinated greenhouse gases

R-32

SkyAir Advance-series BLUEVOLUTION

Sky Air Advance-series

Technology and comfort combined for commercial applications

- High efficiency:
  - Energy labels up to A++ (cooling) / A+ (heating)
  - Compressor offers substantial efficiency improvements
- Very compact and easy to install
- Replace existing systems with R-32 technology without needing to replace the piping
- Guarantees operation in both heating and cooling mode down to -15°C
- Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- Maximum piping length up to 50m, minimum piping length has no limitation
- Outdoor units for pair, twin, triple, double twin application



RZASG100-140MV(1)/MY(1)

Pair, twin, triple and double twin application

		FCAG-B							FFA-A9			FDXM-F9			FBA-A(9)						
capacity class		35	50	60	71	100	125	140	35	50	60	35	50	60	35	50	60	71	100	125	140
RZASG71MV1		2			P				2			2			2			P			
RZASG100MV(1)	RZASG100MY(1)	3	2			P			3	2		3	2		3	2			P		
RZASG125MV(1)	RZASG125MY(1)	4	3	2			P		4	3	2	4	3	2	4	3	2			P	
RZASG140MV(1)	RZASG140MY(1)	4	3		2			P	4	3		4	3		4	3		2			P

		FDA-A	FHA-A(9)							FUA-A			FAA-B		FVA-A				FNA-A9		
capacity class		125	35	50	60	71	100	125	140	71	100	125	71	100	71	100	125	140	35	50	60
RZASG71MV1			2			P				P			P		P				2		
RZASG100MV(1)	RZASG100MY(1)		3	2			P				P			P		P			3	2	
RZASG125MV(1)	RZASG125MY(1)	P	4	3	2			P				P					P		4	3	2
RZASG140MV(1)	RZASG140MY(1)		4	3		2			P	2			2		2			P	4	3	

P = Pair, 2 = Twin, 3 = Triple, 4 = Double twin

More details and final information can be found by scanning or clicking the QR codes.

RZASG-MV1 RZASG-MY1 RZASG-MV RZASG-MY

Outdoor unit				RZASG	71MV1	100MV(1)	125MV(1)	140MV(1)	100MY(1)	125MY(1)	140MY(1)
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320	990x940x320					
Weight	Unit			kg	60	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)	70 (MY1) / 72 (MY)		78 (MV1) / 79 (MV)
Sound power level	Cooling			dBA	65	70	71	73	70	71	73
	Heating			dBA	-		71(1)	73(1)	-	71(1)	73(1)
Sound pressure level	Cooling	Nom.		dBA	46	53		54	53		54
	Heating	Nom.		dBA	47	57					
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~46						
	Heating	Ambient	Min.~Max.	°CWB	-15~15.5						
Refrigerant	Type/GWP				R-32/675						
	Charge			kg/TCO2Eq	2.45/1.65	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas	OD		mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	50						
		System	Equivalent	m	70						
			Chargeless	m	30						
	Additional refrigerant charge			kg/m	See installation manual						
	Level difference	IU - OU	Max.	m	30.0						
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				3~/50 /380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	20	25		32	16		

(1)According to ENER Lot 21 | Contains fluorinated greenhouse gases

R-32

Sky Air Advance-series BLUEVOLUTION

Sky Air Advance-series

Large Sky Air system for commercial applications in the most compact casing ever



RZA-D

- Compact (870mm high) and lightweight single fan design makes the unit unobtrusive, saves space and is easy to install
- Market-leading serviceability and handling, thanks to wide access area, 7-segment display and additional handle
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A, leads directly to lower energy consumption thanks to its high energy efficiency and has a lower refrigerant charge
- Replace existing systems with R-32 technology without needing to replace the piping
- Guarantees operation in heating mode down to -20°C
- Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- Maximum piping length up to 100m
- Maximum installation height difference up to 30m
- Outdoor units for pair, twin, triple, double twin application
- Combines with EKLN-A low sound enclosure

Comfort cooling combination table

	FCAG-B					FFA-A9		FDXM-F9		FBA-A(9)					FHA-A(9)					FDA-A			FUA-A			FAA-B		FVA-A			FNA-A9	
capacity class	50	60	71	100	125	50	60	50	60	50	60	71	100	125	50	60	71	100	125	125	200	250	71	100	125	71	100	71	100	125	50	60
RZA200D	4	3	3	2		4	3	4	3	4	3	3	2		4	3	3	2			P		3	2		3	2	3	2		4	3
RZA250D		4			2		4		4		4			2		4			2	2		P			2					2		4

P = pair application

More details and final information can be found by scanning or clicking the QR codes.

RZA-D

Outdoor unit				RZA	200D	250D
Dimensions	Unit	HeightxWidthxDepth		mm	870x1,100x460	
Weight	Unit			kg	117	
Sound power level	Cooling			dBA	73	76
	Heating			dBA	76	79
Sound pressure level	Cooling	Nom.		dBA	53	57
	Heating	Nom.		dBA	60	63
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-20~46	
	Heating	Ambient	Min.~Max.	°CWB	-20~15	
Refrigerant	Type/GWP				R-32/675	
	Charge			kg/TCO2Eq	5/3.38	
Piping connections	Liquid/Gas	OD		mm	9.52/22.2	
	Piping length	OU - IU	Max.	m	100	
		System	Chargeless	m	30	
	Additional refrigerant charge			kg/m	See installation manual	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /380-415	
Current - 50Hz	Maximum fuse amps (MFA)			A	20	

Contains fluorinated greenhouse gases

R-32

SkyAir Active-series BLUEVOLUTION

Sky Air Active-series

Ideal solution for busy environments and small shops

- High efficiency:
  - Energy labels up to A+ (cooling) / A (heating)
  - compressor offers substantial efficiency improvements
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- Very compact and easy to install
- Replace existing systems with R-32 technology without needing to replace the piping



- Guarantees operation in heating mode down to -15°C and in cooling mode down to -10°C
- Refrigerant cooled PCB guarantees reliable cooling, as it is not influenced by ambient temperature.
- Piping length up to 30m
- Exclusively offered for pair applications



AZAS100-140MV_MY

Pair application

	FCAG-B				FBA-A(9)				FAA-B				NEW FHA-A(9)				NEW FVA-A				ADEA-A		
capacity class	71	100	125	140	71	100	125	140	71	100	125	140	71	100	125	140	71	100	125	140	71	100	125
ARXM-R	P				P				P												P		
AZAS-MV		P	P	P		P	P	P		P				P	P	P		P	P	P		P	P
AZAS-MY		P	P	P		P	P	P		P				P	P	P		P	P	P			

P = pair application

More details and final information can be found by scanning or clicking the QR codes.

ARXM-R AZAS-MV AZAS-MY

Outdoor Unit					ARXM71R	AZAS100MV	AZAS125MV	AZAS140MV	AZAS100MY	AZAS125MY	AZAS140MY
Dimensions	Unit	HeightxWidthxDepth		mm	734x954x401	990x940x320					
Weight	Unit			kg	49.0	72		79	72		79
Sound power level	Cooling			dBA	-	70	71	72	70	71	72
	Heating			dBA	-	70	71	72	70	71	72
Sound pressure level	Cooling	Nom.		dBA	52.0	53	54	55	53	54	55
	Heating	Nom.		dBA	52.0	57	58	59	57	58	59
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46						
	Heating	Ambient	Min.~Max.	°CWB	-15~24	-15~15.5					
Refrigerant	Type/GWP				R-32/675						
	Charge			kg/TCO2Eq	1.15/0.780	2.60/1.76		2.90/1.96	2.60/1.76		2.90/1.96
Piping connections	Liquid/Gas OD			mm	9.52/15.9						
	Piping length	OU - IU	Max.	m	30						
		System	Equivalent	m	-	50					
			Chargeless	m	-	30					
	Additional refrigerant charge			kg/m	0.035 (for piping length exceeding 10m)	See installation manual					
	Level difference IU - OU		Max.	m	20.0	30.0					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240				3~/50/380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	-	25	32		16		

Contains fluorinated greenhouse gases

Options - Sky Air

			FCAHG-H FCAG-B	FFA-A9	FDXM-F9	FBA-A(9)
	INDOOR UNITS					
Panels	Decoration panel (obligatory for cassette units, optional for others)		Standard panels: BYCQ140E (white) / BYCQ140EW (full white)(1) / BYCQ140EB (black) Auto cleaning panels(2) (4): BYCQ140EGF (white) / BYCQ140EGFB (black) Designer panels: BYCQ140EP (white) / BYCQ140EPB (black)	BYFQ60C2W1W (white panel) BYFQ60C2W1S (grey panel) BYFQ60B3W1 (standard panel)		
	Panel spacer for reducing required installation height			KDBQ44B60 (only for standard panel)		
	Sealing kit for 3- or 2-directional air discharge		KDBHQ56B140 (11)	BDBHQ44C60		
	Sensor kit		BRYQ140B (white) BRYQ140BB (black) BRYQ140C (white designer) BRYQ140CB (black designer)	BRYQ60AW (white)(9) BRYQ60AS (silver)(9)		
Individual control systems	Onecta app		BRP069C82 (14) (18)	BRP069C81 (18)	BRP069C81	BRP069C81 (18)
	Infrared remote control (incl. receiver)		BRC7FA532F (white) (11) (16) BRC7FA532FB (black) (11) (16) BRC7FB532F (designer white) (11) (16) BRC7FB532FB (designer black) (11) (16)	BRC7EB530W for standard panel (5)(6) BRC7F530W for white panel (5)(6) BRC7F530S - for silver panel (5)(6)	BRC4C65	BRC4C65
	Madoka **BRC1H52W** (9) (White) / **BRC1H52S** (9) (Silver) / **BRC1K552K** (9) (Black) User-friendly wired remote controller with premium design		●	●	●	●
	BRC1E53A/B/C (3) (13) - Wired remote controller with full-text interface and back-light		●	●	●	●
Centralised control systems	**DIII-net connection** - for connection to centralized control		standard	standard	standard	standard
	DCC601A51 - intelligent Tablet Controller		●	●	●	●
	DCS601C51 (13) - intelligent Touch Controller		●	●	●	●
	DCS302C51 (13) - Central remote controller		●	●	●	●
	DCS301B51 (13) - Unified ON/OFF controller		●	●	●	●
Building Management System & Standard protocol interfaces — **for individual control**	**EKMBPP1** - Modbus interface for monitoring and control		●	●	●	●
	RTD-10 - Modbus interface for infrastructure cooling		●	●	●	●
	RTD-20 - Modbus interface for retail		●	●	●	●
	RTD-HO - Modbus interface for hotel		●	●	●	●
	KLIC-DI_V2 - KNX Interface		●	●	●	●
for central control	**DCM601B51** - intelligent Touch Manager		●	●	●	●
	DGE601A51 - Edge adapter for connection to Daikin Cloud Plus		●	●	●	●
	DGE602A51 - Edge lite adapter for connection to Daikin Cloud Plus		●	●	●	●
	EKMBDXB - Modbus interface		●	●	●	●
	DCM010A51 - Daikin PMS interface		●	●	●	●
	DMS502A51 - BACnet Interface		●	●	●	●
	DMS504B51 - LonWorks Interface		●	●	●	●
Filters	Auto cleaning filter		see deco panel		BAE20A62 (25 - 35) BAE20A102 (50 - 60)	
	UV Streamer kit (purifies the air of pollutants such as virusses, bacteria, fine dust, odours, allergens, etc ensuring a healthy indoor environment)	UV Streamer kit	BAEF125AWB (22)			
		Replacement filter	BAF55A125			
	High efficiency filter		ePM10 60% BAF552AA160 (23) (BAF552AA160-5: box of 5 filters) (BAF552AA160-10: box of 10 filters)			
	Replacement long-life filter, non-woven type		KAF5511D160	KAF441C60		
	Filter chamber					
Wiring and sensors	Extension wire auto cleaning panel (required when auto cleaning panel AND Onecta app are both installed)					
	KRCS - External wired temperature sensor		KRCS01-5B	KRCS01-4	KRCS01-4	KRCS01-4
	K.RSS - External wireless temperature sensor		SB.K.RSS_RFC (EKEWTSC-2 + K.RSS)	●		●
Wiring and sensors Adapters	Wiring adapter with 2 output signals (compressor/ Error, Fan output)		KRP1BA58 (10)(11)	KRP1B57 (10)	KRP1B56 (10)	
	Adapter (interlock for fresh air intake fan)					KRP1B54
	Adapter with 4 output signals (compressor / Error, Fan, Aux, heater, Humidifier output)		EKRP1C12 (10)(11)	EKRP1B2		EKRP1B2 (7)
	Adapter for centralised external monitoring/control (controls 1 entire DIII-NET system)				KRP2A53 (10)	KRP2A51 (7)(10)
	Adapter for centralised external monitoring/control via dry contacts and setpoint control via 0-140Ω (for dedicated indoor)		KRP4A53 (10)(11)(17)	KRP4A51	KRP4A54-9	KRP4A52 (10)
	Adapter for keycard and/or window contact connection (in combination with BRC1H*, BRC1/2/3E* only)		BRP7A53	BRP7A53	BRP7A54 (10)	BRP7A51 (12)
	Installation box/Mounting plate for adapter PCBs (when there is no space in the switchbox, an installation box is required)		KRP1H98A (11)	KRP4A93	KRP1BC101	KRP1BC101
	Wiring kit for Remote ON/OFF or Forced OFF		standard	standard	standard	standard
Others	Drain pump kit					
	Multi zoning kit (for detailed model code overview refer to multizoning argue card in this catalogue)				●	●
	L-type piping kit (upward direction)					
	Fresh air intake kit (direct installation type)		KDDP55C160-1 (chamber) KDDP55D160-2 (diffuser) (11)	KDDQ44XA60		
	Air discharge adapter for round duct					KDAP25A56A (35-50) KDAP25A71A (60-71) KDAP25A140A (100-140)

(1) Dirt formation is more easily visible on white insulation. It is recommended not to install this option in environments with a high concentration of dirt.
(2) To be able to control option BYCQ140EG(F)/EGFB, controller BRC1H*, BRC1E* is needed. These options cannot be combined with RXYSQ*, multi or non-inverter split units
(3) Included languages are:
A: English, German, French, Dutch, Spanish, Italian and Portuguese
B: English, Bulgarian, Croatian, Czech, Hungarian, Romanian and Slovenian
C: English, Greek, Polish, Russian, Albanian, Slovak and Turkish
(4) The option is intended exclusively for use in fine dust enviornments (e.g. Clothing shops). Do not use it in environments that are greasy or have high humidity. F = finer mesh
(5) Sensing function is not available
(6) Individual flap control function not available
(7) If installing an electrical heater, an option PCB for external electrical heater (EKRP1B2) for each indoor unit is required. These options require mounting plate KRP4A96. Electrical heaters and humidifiers are field-supplied. Do not install them inside the equipment.
(8) Mounting plate KRP4A96 is required for these options. Maximum 2 option PCB's can be mounted.
(9) This option cannot be used with RR and RQ models

FDA125A	FDA200-250A	ADEA-A	FAA-B	FTXM-R	FHA-A(9)	FUA-A	FVA-A	FNA-A9
BYBS125D (19)						KDBTP49B140		
						KDBHP49B140		
BRP069C81 (18)	BRP069C82 (20)	BRP069C81 (18)	BRP069C81 (18)	Integrated in PCB	BRP069C81 (18)	BRP069C81 (18)	BRP069C81 (18)	BRP069C81 (18)
BRC4C65	BRC4C65	BRC4C65	BRC7EA631 (71 class) BRC7EA632 (100 class)	ARC466A67	BRC7GA53-9	BRC7C58		BRC4C65
●	●	●	●		●	●	●	●
●	●	●	●	● (BRC073A1) BRCW901A03/A08 extention cords available (15)	●	●	●	●
standard	standard	standard	standard	KRP928BB2S (15)	standard	standard	standard	standard
●	●	●	●		●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (KLIC-DDV3) (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
●	●	●	●	● (15)	●	●	●	●
	BAFL502A250 (20)				KAF501B56 (35-50) KAF501B80 (60-71) KAF501B160 (100-140)	KAF5511D160	KAFJ95L160	
	BDD500B250							
KRCS01-4	KRCS01-6B	KRCS01-4	KRCS01-4		KRCS01-4	KRCS01-4		KRCS01-4
●	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	●			●	●		●
	KRP4A51 (17)		KRP4A51 (10)	KRP413AB1S (15)			KRP1B57 (10)	
KRP1C64 (8)	KRP1C65	KRP1B54			KRP1B54 (10)			
EKRP1B2 (7)	EKRP1C13	EKRP1B2 (7)						KRP1B56
KRP2A51 (8)	KRP2A51 (17)	KRP2A51 (7)(10)						
		KRP4A52 (10)			KRP4A52 (10)	KRP1B97	KRP4A52 (10)	KRP4A54-9
BRP7A54 (8)	BRP7A54	BRP7A51 (12)	BRP7A51 (10)		BRP7A52 (10)	BRP7A53 (10)	BRP7A52 (10)	
KRP4A96		KRP1BC101	KRP4B93		KRP1D93A (21)	KRP1BA97	KRP4AA95	KRP1BB101
EKRORO3		standard	standard		EKRORO4	EKRORO5	standard	standard
	BDU510B250VM		K-KDU572KVE		KDU50R63 (35 - 60) KDU50R160 (71 - 140)			
		●						
					KHFP5MA35 (35) KHFP5N63 (50-60) KHFP5N160 (71-140)			
KDAJ25K140A		KDAP25A56A (35-50) KDAP25A71A (60-71) KDAP25A140A (100-140)						

(10) Requires installation box for adapter PCB, refer to table for model code
(11) This option cannot be combined with BYCQ140EG(F)/EGFB
(12) Maximum 2 optional PCBs can be mounted
(13) Applicable boxes (KJB*) to mount controllers can be found in the controls option list
(14) Extention wire (EWHAR1) is needed if both auto cleaning panel AND Onecta app are connected
(15) Wire harness EKRS21 needed. Standard Wireless LAN needs to be turned off to use these controllers
(16) The active airflow circulation function is not available for this controller
(17) This option cannot be combined with Onecta app
(18) Only possible in combination with wired or wireless remote control
(19) For directly mounting the decoration panel on the unit, decoration panel option EKBYBSD is required.
(20) This option cannot be combined with KRP4A51 and KRP2A51. (in case of filter, filter chamber is required)
(21) Mounting plate KKSAP50A56 needed for 35-50 capacity class
(22) Only possible in combination with BYCQ140E and BYCQ140EW. Cannot be combined with other filters, chambers, fresh air intake kits or air discharge outlet sealing member kit
(23) Only possible in combination with BYCQ140E/EW/EB. Cannot be combined with other filters, chambers, fresh air intake kits or discharge outlet sealing member kit

		R-32				
		RZAG-A	RZAG-NV1/NY1	RZASG-MV(1)/MY(1)	RZA-D	AZAS-MV/MY
Refrigerant branch piping (3)	for twin		KHRQ58T (imperial size)	KHRQ58T (imperial size)	KHRQ22M20TA (imperial size)	
	for triple		KHRQ58H (imperial size)	KHRQ58H (100 - 140) (imperial size)	KHRQ250H7 (imperial size)	
	for double twin		KHRQ58T (3x) (125 - 140) (imperial size)	KHRQ58T (3x) (125 - 140) (imperial size)	KHRQ22M20TA (x3) (imperial size)	
	Asymmetric combinations piping reducer	ASYCPIR (see table below)				
Demand adapter kit			SB.KRP58M52 (1)	SB.KRP58M52 (1)	KRP58M51 (2)	
Bottom plate heater - To keep drain holes ice-free in extreme weather conditions			EKBPH140N		EKBPH250D	
Sound enclosure			EKLN140A		EKLN140A	

(1) Contains KRP58M1 and obligatory mounting kit EKMKSA2
(2) To mount KRP58M51, an additional mounting kit (EKMKSA3) needs to be used (obligatory)
(3) For metric size refrigerant branching contact your local sales representative

EKLN140A - Sound enclosure

Drain pan	EKLN140-DP
Drain pan heater tape	EKLN140-DPHT (1)

(1) Only in combination with EKLN140-DP

Option for asymmetric combination (Asymmetric combinations piping reducer)

ASYCPIR		Liquid	GAS	
		ø 9.52 → ø 6.4	ø 12.7 → ø 9.52	ø 15.9 → ø 12.7
RZAG35A	FDXM50F9		●	
	FFA50A9		●	
	FBA50A9		●	
	FCAG50B		●	
	FNA50A9		●	
	FTXM50R		●	
	FHA50A9		●	
RZAG60A	FBA71A9	●		
	FCAG71B	●		●
	FTXM71R			●
	FHA71A9	●		●

Example of using:
1) Connecting a pipe of ø12.7 to a gas pipe connection port for ø15.9:

